

Formalization of Bachmair and Ganzinger’s Ordered Resolution Prover

Anders Schlichtkrull, Jasmin Christian Blanchette, Dmitriy Traytel, and Uwe Waldmann

November 18, 2018

Abstract

This Isabelle/HOL formalization covers Sections 2 to 4 of Bachmair and Ganzinger’s “Resolution Theorem Proving” chapter in the *Handbook of Automated Reasoning*. This includes soundness and completeness of unordered and ordered variants of ground resolution with and without literal selection, the standard redundancy criterion, a general framework for refutational theorem proving, and soundness and completeness of an abstract first-order prover.

Contents

1	Introduction	2
2	Map Function on Two Parallel Lists	2
3	Liminf of Lazy Lists	4
4	Relational Chains over Lazy Lists	6
4.1	Chains	7
4.2	Full Chains	15
5	Clausal Logic	16
5.1	Literals	16
5.2	Clauses	18
6	Herbrand Intepretation	21
7	Abstract Substitutions	22
7.1	Library	22
7.2	Substitution Operators	23
7.3	Substitution Lemmas	26
7.3.1	Identity Substitution	26
7.3.2	Associativity of Composition	27
7.3.3	Compatibility of Substitution and Composition	27
7.3.4	“Commutativity” of Membership and Substitution	27
7.3.5	Signs and Substitutions	28
7.3.6	Substitution on Literal(s)	28
7.3.7	Substitution on Empty	28
7.3.8	Substitution on a Union	29
7.3.9	Substitution on a Singleton	30
7.3.10	Substitution on (#)	30
7.3.11	Substitution on tl	31
7.3.12	Substitution on (!)	31
7.3.13	Substitution on Various Other Functions	31
7.3.14	Renamings	31
7.3.15	Monotonicity	33
7.3.16	Size after Substitution	33
7.3.17	Variable Disjointness	33

7.3.18	Ground Expressions and Substitutions	33
7.3.19	Subsumption	36
7.3.20	Unifiers	36
7.3.21	Most General Unifier	36
7.3.22	Generalization and Subsumption	36
7.4	Most General Unifiers	39
8	Refutational Inference Systems	40
8.1	Preliminaries	40
8.2	Refutational Completeness	41
8.3	Compactness	42
9	Candidate Models for Ground Resolution	44
10	Ground Unordered Resolution Calculus	50
10.1	Inference Rule	50
10.2	Inference System	51
11	Ground Ordered Resolution Calculus with Selection	52
11.1	Inference Rule	52
11.2	Inference System	59
12	Theorem Proving Processes	59
13	The Standard Redundancy Criterion	64
14	First-Order Ordered Resolution Calculus with Selection	69
14.1	Library	69
14.2	Calculus	70
14.3	Soundness	71
14.4	Other Basic Properties	73
14.5	Inference System	74
14.6	Lifting	77
15	An Ordered Resolution Prover for First-Order Clauses	89

1 Introduction

Bachmair and Ganzinger’s “Resolution Theorem Proving” chapter in the *Handbook of Automated Reasoning* is the standard reference on the topic. It defines a general framework for propositional and first-order resolution-based theorem proving. Resolution forms the basis for superposition, the calculus implemented in many popular automatic theorem provers.

This Isabelle/HOL formalization covers Sections 2.1, 2.2, 2.4, 2.5, 3, 4.1, 4.2, and 4.3 of Bachmair and Ganzinger’s chapter. Section 2 focuses on preliminaries. Section 3 introduces unordered and ordered variants of ground resolution with and without literal selection and proves them refutationally complete. Section 4.1 presents a framework for theorem provers based on refutation and saturation. Finally, Section 4.2 generalizes the refutational completeness argument and introduces the standard redundancy criterion, which can be used in conjunction with ordered resolution. Section 4.3 lifts the result to a first-order prover, specified as a calculus. Figure 1 shows the corresponding Isabelle theory structure.

2 Map Function on Two Parallel Lists

```
theory Map2
  imports Main
begin
```

This theory defines a map function that applies a (curried) binary function elementwise to two parallel lists. The definition is taken from https://www.isa-afp.org/browser_info/current/AFP/Jinja/Listn.html.

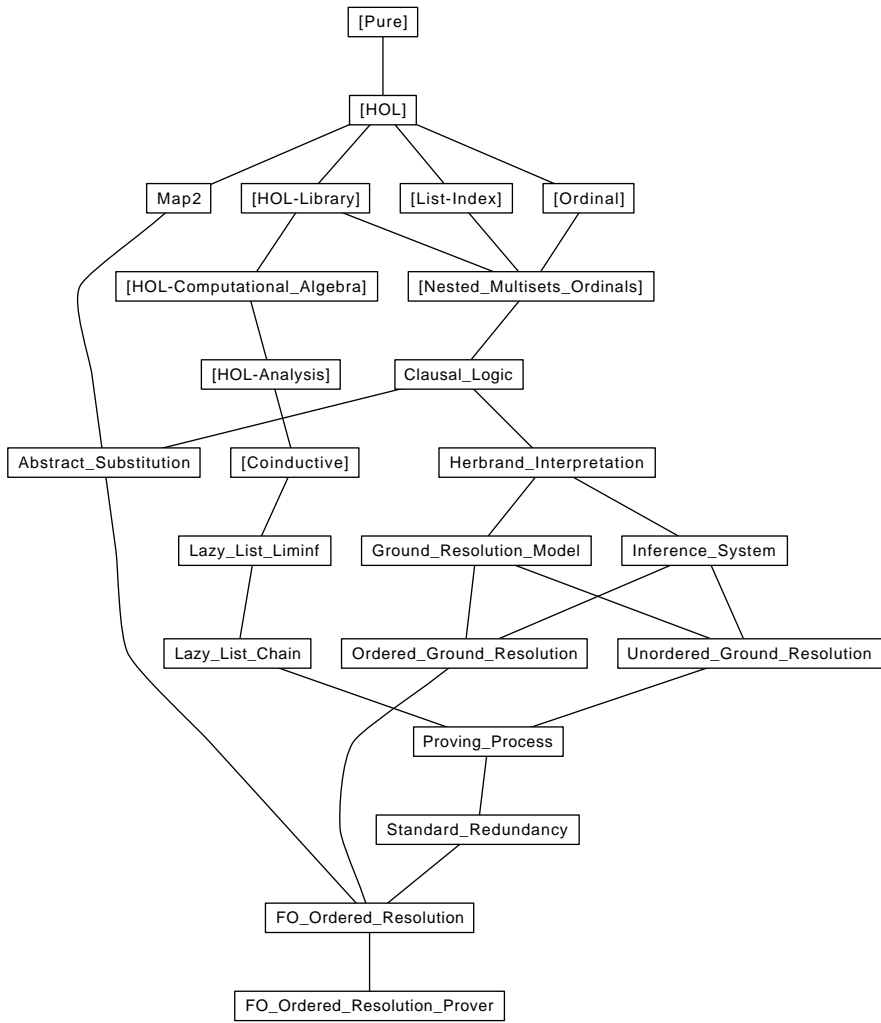


Figure 1: Theory dependency graph

abbreviation $map2 :: ('a \Rightarrow 'b \Rightarrow 'c) \Rightarrow 'a \text{ list} \Rightarrow 'b \text{ list} \Rightarrow 'c \text{ list}$ **where**
 $map2 f xs ys \equiv map (case_prod f) (zip xs ys)$

lemma $map2_empty_iff[simp]$: $map2 f xs ys = [] \longleftrightarrow xs = [] \vee ys = []$
by (*metis Nil.is_map_conv list.exhaust list.simps(3) zip.simps(1) zip.Cons.Cons zip.Nil*)

lemma $image_map2$: $length t = length s \Longrightarrow g \text{ ` set } (map2 f t s) = set (map2 (\lambda a b. g (f a b)) t s)$
by *auto*

lemma $map2_tl$: $length t = length s \Longrightarrow map2 f (tl t) (tl s) = tl (map2 f t s)$
by (*metis (no_types, lifting) hd.Cons_tl list.sel(3) map2_empty_iff map_tl tl.Nil zip.Cons.Cons*)

lemma map_zip_assoc :
 $map f (zip (zip xs ys) zs) = map (\lambda(x, y, z). f ((x, y), z)) (zip xs (zip ys zs))$
by (*induct zs arbitrary: xs ys*) (*auto simp add: zip.simps(2) split: list.splits*)

lemma set_map2_ex :
assumes $length t = length s$
shows $set (map2 f s t) = \{x. \exists i < length t. x = f (s ! i) (t ! i)\}$

proof (*rule; rule*)

fix x

assume $x \in set (map2 f s t)$

then obtain i **where** $i_p: i < length (map2 f s t) \wedge x = map2 f s t ! i$

by (*metis in_set_conv_nth*)

from i_p **have** $i < length t$

by *auto*

moreover from $this i_p$ **have** $x = f (s ! i) (t ! i)$

using *assms* **by** *auto*

ultimately show $x \in \{x. \exists i < length t. x = f (s ! i) (t ! i)\}$

using *assms* **by** *auto*

next

fix x

assume $x \in \{x. \exists i < length t. x = f (s ! i) (t ! i)\}$

then obtain i **where** $i_p: i < length t \wedge x = f (s ! i) (t ! i)$

by *auto*

then have $i < length (map2 f s t)$

using *assms* **by** *auto*

moreover from i_p **have** $x = map2 f s t ! i$

using *assms* **by** *auto*

ultimately show $x \in set (map2 f s t)$

by (*metis in_set_conv_nth*)

qed

end

3 Liminf of Lazy Lists

theory *Lazy_List_Liminf*

imports *Coinductive.Coinductive_List*

begin

Lazy lists, as defined in the *Archive of Formal Proofs*, provide finite and infinite lists in one type, defined coinductively. The present theory introduces the concept of the union of all elements of a lazy list of sets and the limit of such a lazy list. The definitions are stated more generally in terms of lattices. The basis for this theory is Section 4.1 (“Theorem Proving Processes”) of Bachmair and Ganzinger’s chapter.

definition $Sup_llist :: 'a \text{ set } llist \Rightarrow 'a \text{ set}$ **where**

$Sup_llist Xs = (\bigcup i \in \{i. enat i < llength Xs\}. lnth Xs i)$

lemma $lnth_subset_Sup_llist$: $enat i < llength xs \Longrightarrow lnth xs i \subseteq Sup_llist xs$
unfolding Sup_llist_def **by** *auto*

lemma $Sup_llist_LNil[simp]$: $Sup_llist LNil = \{\}$
unfolding Sup_llist_def **by** *auto*

lemma *Sup_llist_LCons*[simp]: $Sup_llist (LCons X Xs) = X \cup Sup_llist Xs$
unfolding *Sup_llist_def*
proof (*intro subset_antisym subsetI*)
fix x
assume $x \in (\bigcup i \in \{i. enat i < llength (LCons X Xs)\}. lnth (LCons X Xs) i)$
then obtain i **where** $len: enat i < llength (LCons X Xs)$ **and** $nth: x \in lnth (LCons X Xs) i$
by *blast*
from nth **have** $x \in X \vee i > 0 \wedge x \in lnth Xs (i - 1)$
by (*metis lnth_LCons' neq0_conv*)
then have $x \in X \vee (\exists i. enat i < llength Xs \wedge x \in lnth Xs i)$
by (*metis len Suc_pred' eSuc.enat iless_Suc_eq less_irrefl llength_LCons not_less order_trans*)
then show $x \in X \cup (\bigcup i \in \{i. enat i < llength Xs\}. lnth Xs i)$
by *blast*
qed ((*auto*)[], *metis i0_lb lnth_0 zero_enat_def, metis Suc_ile_eq lnth_Suc_LCons*)

lemma *lhd_subset_Sup_llist*: $\neg lnull Xs \implies lhd Xs \subseteq Sup_llist Xs$
by (*cases Xs*) *simp_all*

definition *Sup_upto_llist* :: $'a$ set $llist \Rightarrow nat \Rightarrow 'a$ set **where**
 $Sup_upto_llist Xs j = (\bigcup i \in \{i. enat i < llength Xs \wedge i \leq j\}. lnth Xs i)$

lemma *Sup_upto_llist_mono*: $j \leq k \implies Sup_upto_llist Xs j \subseteq Sup_upto_llist Xs k$
unfolding *Sup_upto_llist_def* **by** *auto*

lemma *Sup_upto_llist_subset_Sup_llist*: $j \leq k \implies Sup_upto_llist Xs j \subseteq Sup_llist Xs$
unfolding *Sup_llist_def Sup_upto_llist_def* **by** *auto*

lemma *elem_Sup_llist_imp_Sup_upto_llist*: $x \in Sup_llist Xs \implies \exists j. x \in Sup_upto_llist Xs j$
unfolding *Sup_llist_def Sup_upto_llist_def* **by** *blast*

lemma *finite_Sup_llist_imp_Sup_upto_llist*:
assumes *finite X* **and** $X \subseteq Sup_llist Xs$
shows $\exists k. X \subseteq Sup_upto_llist Xs k$
using *assms*
proof *induct*
case (*insert x X*)
then have $x: x \in Sup_llist Xs$ **and** $X: X \subseteq Sup_llist Xs$
by *simp+*
from x **obtain** k **where** $k: x \in Sup_upto_llist Xs k$
using *elem_Sup_llist_imp_Sup_upto_llist* **by** *fast*
from X **obtain** k' **where** $k': X \subseteq Sup_upto_llist Xs k'$
using *insert.hyps*(\exists) **by** *fast*
have $insert x X \subseteq Sup_upto_llist Xs (max k k')$
using $k k'$
by (*metis insert_absorb insert_subset Sup_upto_llist_mono max.cobounded2 max.commute order.trans*)
then show *?case*
by *fast*
qed *simp*

definition *Liminf_llist* :: $'a$ set $llist \Rightarrow 'a$ set **where**
 $Liminf_llist Xs = (\bigcup i \in \{i. enat i < llength Xs\}. \bigcap j \in \{j. i \leq j \wedge enat j < llength Xs\}. lnth Xs j)$

lemma *Liminf_llist_subset_Sup_llist*: $Liminf_llist Xs \subseteq Sup_llist Xs$
unfolding *Liminf_llist_def Sup_llist_def* **by** *fast*

lemma *Liminf_llist_LNil*[simp]: $Liminf_llist LNil = \{\}$
unfolding *Liminf_llist_def* **by** *simp*

lemma *Liminf_llist_LCons*:
 $Liminf_llist (LCons X Xs) = (if lnull Xs then X else Liminf_llist Xs)$ (**is** *?lhs = ?rhs*)

```

proof (cases lnull Xs)
  case nnull: False
  show ?thesis
  proof
    {
      fix x
      assume  $\exists i. \text{enat } i \leq \text{llength } Xs$ 
       $\wedge (\forall j. i \leq j \wedge \text{enat } j \leq \text{llength } Xs \longrightarrow x \in \text{lnth } (LCons X Xs) j)$ 
      then have  $\exists i. \text{enat } (Suc\ i) \leq \text{llength } Xs$ 
       $\wedge (\forall j. Suc\ i \leq j \wedge \text{enat } j \leq \text{llength } Xs \longrightarrow x \in \text{lnth } (LCons X Xs) j)$ 
      by (cases llength Xs,
        metis not_lnull_conv[THEN iffD1, OF nnull] Suc.le_D eSuc.enat eSuc.ile_mono
          llength_LCons not_less_eq_eq zero.enat_def zero.le,
          metis Suc.leD enat_ord_code(3))
      then have  $\exists i. \text{enat } i < \text{llength } Xs \wedge (\forall j. i \leq j \wedge \text{enat } j < \text{llength } Xs \longrightarrow x \in \text{lnth } Xs\ j)$ 
      by (metis Suc.ile_eq Suc.n_not_le.n lift_Suc_mono.le lnth_Suc_LCons nat.le_linear)
    }
  then show ?lhs  $\subseteq$  ?rhs
  by (simp add: Liminf_llist_def nnull) (rule subsetI, simp)

  {
    fix x
    assume  $\exists i. \text{enat } i < \text{llength } Xs \wedge (\forall j. i \leq j \wedge \text{enat } j < \text{llength } Xs \longrightarrow x \in \text{lnth } Xs\ j)$ 
    then obtain i where
      i:  $\text{enat } i < \text{llength } Xs$  and
      j:  $\forall j. i \leq j \wedge \text{enat } j < \text{llength } Xs \longrightarrow x \in \text{lnth } Xs\ j$ 
    by blast

    have  $\text{enat } (Suc\ i) \leq \text{llength } Xs$ 
    using i by (simp add: Suc.ile_eq)
    moreover have  $\forall j. Suc\ i \leq j \wedge \text{enat } j \leq \text{llength } Xs \longrightarrow x \in \text{lnth } (LCons X Xs) j$ 
    using Suc.ile_eq Suc.le_D j by force
    ultimately have  $\exists i. \text{enat } i \leq \text{llength } Xs \wedge (\forall j. i \leq j \wedge \text{enat } j \leq \text{llength } Xs \longrightarrow$ 
       $x \in \text{lnth } (LCons X Xs) j)$ 
    by blast
  }
  then show ?rhs  $\subseteq$  ?lhs
  by (simp add: Liminf_llist_def nnull) (rule subsetI, simp)
qed
qed (simp add: Liminf_llist_def enat_0_iff(1))

lemma lfinite_Liminf_llist: lfinite Xs  $\implies$  Liminf_llist Xs = (if lnull Xs then {} else llast Xs)
proof (induction rule: lfinite_induct)
  case (LCons xs)
  then obtain y ys where
    xs:  $xs = LCons\ y\ ys$ 
  by (meson not_lnull_conv)
  show ?case
  unfolding xs by (simp add: Liminf_llist_LCons LCons.IH[unfolded xs, simplified] llast_LCons)
qed (simp add: Liminf_llist_def)

lemma Liminf_llist_ltl:  $\neg$  lnull (ltl Xs)  $\implies$  Liminf_llist Xs = Liminf_llist (ltl Xs)
  by (metis Liminf_llist_LCons lhd_LCons_ltl lnull_ltlI)

end

```

4 Relational Chains over Lazy Lists

```

theory Lazy_List_Chain
  imports HOL-Library.BNF-Corec Lazy_List_Liminf
begin

```

A chain is a lazy lists of elements such that all pairs of consecutive elements are related by a given relation.

A full chain is either an infinite chain or a finite chain that cannot be extended. The inspiration for this theory is Section 4.1 (“Theorem Proving Processes”) of Bachmair and Ganzinger’s chapter.

4.1 Chains

coinductive *chain* :: ('a ⇒ 'a ⇒ bool) ⇒ 'a llist ⇒ bool **for** *R* :: 'a ⇒ 'a ⇒ bool **where**
chain_singleton: *chain R (LCons x LNil)*
| *chain_cons*: *chain R xs ⇒ R x (lhd xs) ⇒ chain R (LCons x xs)*

lemma

chain_LNil[simp]: $\neg \text{chain } R \text{ LNil}$ **and**
chain_not_lnull: *chain R xs ⇒ ¬ lnull xs*
by (*auto elim: chain.cases*)

lemma *chain_lappend*:

assumes

r_xs: *chain R xs* **and**

r_ys: *chain R ys* **and**

mid: *R (llast xs) (lhd ys)*

shows *chain R (lappend xs ys)*

proof (*cases lfinite xs*)

case *True*

then show *?thesis*

using *r_xs mid*

proof (*induct rule: lfinite.induct*)

case (*lfinite_LConsI xs x*)

note *fin = this(1)* **and** *ih = this(2)* **and** *r_xxs = this(3)* **and** *mid = this(4)*

show *?case*

proof (*cases xs = LNil*)

case *True*

then show *?thesis*

using *r_ys mid* **by** *simp (rule chain_cons)*

next

case *xs_nnil: False*

have *r_xs*: *chain R xs*

by (*metis chain_simps ltl_simps(2) r_xxs xs_nnil*)

have *mid'*: *R (llast xs) (lhd ys)*

by (*metis llast_LCons lnull_def mid xs_nnil*)

have *start*: *R x (lhd (lappend xs ys))*

by (*metis (no_types) chain_simps lhd_LCons lhd_lappend chain_not_lnull ltl_simps(2) r_xxs xs_nnil*)

show *?thesis*

unfolding *lappend_code(2)* **using** *ih[OF r_xs mid'] start* **by** (*rule chain_cons*)

qed

qed *simp*

qed (*simp add: r_xs lappend_inf*)

lemma *chain_length_pos*: *chain R xs ⇒ llength xs > 0*

by (*cases xs*) *simp+*

lemma *chain_ldropr*:

assumes *chain R xs* **and** *enat n < llength xs*

shows *chain R (ldropr n xs)*

using *assms*

by (*induct n arbitrary: xs, simp,*

metis chain.cases ldropr_eSuc_ltl ldropr_LNil ldropr_eq_LNil ltl_simps(2) not_less)

lemma *chain_lnth_rel*:

assumes

chain: *chain R xs* **and**

len: *enat (Suc j) < llength xs*

shows *R (lnth xs j) (lnth xs (Suc j))*

proof –

```

define ys where ys = ldropn j xs
have llength ys > 1
  unfolding ys_def using len
  by (metis One_nat_def funpow_swap1 ldropn_0 ldropn_def ldropn_eq_LNil ldropn_ltl not_less
      one_enat_def)
obtain y0 y1 ys' where
  ys: ys = LCons y0 (LCons y1 ys')
  unfolding ys_def by (metis Suc_ile_eq ldropn_Suc_conv_ldropn len less_imp_not_less not_less)
have chain R ys
  unfolding ys_def using Suc_ile_eq chain chain_ldropn len less_imp_le by blast
then have R y0 y1
  unfolding ys by (auto elim: chain.cases)
then show ?thesis
  using ys_def unfolding ys by (metis ldropn_Suc_conv_ldropn ldropn_eq_LConsD llist.inject)
qed

```

```

lemma infinite_chain_lnth_rel:
  assumes  $\neg$  lfinite c and chain r c
  shows r (lnth c i) (lnth c (Suc i))
  using assms chain_lnth_rel lfinite_conv_llength_enat by force

```

```

lemma lnth_rel_chain:
  assumes
     $\neg$  lnull xs and
     $\forall j. \text{enat } (j + 1) < \text{llength } xs \longrightarrow R (\text{lnth } xs \ j) (\text{lnth } xs \ (j + 1))$ 
  shows chain R xs
  using assms
proof (coinduction arbitrary: xs rule: chain.coinduct)
  case chain
  note nnul = this(1) and nth_chain = this(2)

```

```

  show ?case
  proof (cases lnull (ltl xs))
    case True
      have xs = LCons (lhd xs) LNil
        using nnul True by (simp add: llist.expand)
      then show ?thesis
        by blast
    next
      case nnul': False
      moreover have xs = LCons (lhd xs) (ltl xs)
        using nnul by simp
      moreover have
         $\forall j. \text{enat } (j + 1) < \text{llength } (\text{ltl } xs) \longrightarrow R (\text{lnth } (\text{ltl } xs) \ j) (\text{lnth } (\text{ltl } xs) \ (j + 1))$ 
        using nnul nth_chain
        by (metis Suc_eq_plus1 ldrop_eSuc_ltl ldropn_Suc_conv_ldropn ldropn_eq_LConsD lnth_ltl)
      moreover have R (lhd xs) (lhd (ltl xs))
        using nnul' nnul nth_chain[rule_format, of 0, simplified]
        by (metis ldropn_0 ldropn_Suc_conv_ldropn ldropn_eq_LConsD lhd_LCons_ltl lhd_conv_lnth
            lnth_Suc_LCons ltl_simps(2))
      ultimately show ?thesis
        by blast
  qed
qed

```

```

lemma chain_lmap:
  assumes  $\forall x y. R \ x \ y \longrightarrow R' \ (f \ x) \ (f \ y)$  and chain R xs
  shows chain R' (lmap f xs)
  using assms
proof (coinduction arbitrary: xs)
  case chain
  then have  $(\exists y. xs = LCons \ y \ LNil) \vee (\exists ys \ x. xs = LCons \ x \ ys \wedge \text{chain } R \ ys \wedge R \ x \ (\text{lhd } ys))$ 
    using chain_simps[of R xs] by auto

```


then show *?case*
proof
assume $\exists ys\ x. xs = LCons\ x\ ys \wedge chain\ R\ ys \wedge R\ x\ (lhd\ ys)$
then have $\exists ys\ x. lmap\ f\ xs = LCons\ x\ ys \wedge$
 $(\exists xs. ys = lmap\ f\ xs \wedge (\forall x\ y. R\ x\ y \longrightarrow R'\ (f\ x)\ (f\ y)) \wedge chain\ R\ xs) \wedge R'\ x\ (lhd\ ys)$
using *chain*
by (*metis* (*no_types*) *lhd_LCons_llist.distinct(1)* *llist.exhaust_sel* *llist.map_sel(1)*
lmap_eq_LNil *chain_not_lnull* *lmap* *ltsimps(2)*)
then show *?thesis*
by *auto*
qed *auto*
qed

lemma *chain_mono*:
assumes $\forall x\ y. R\ x\ y \longrightarrow R'\ x\ y$ **and** *chain* $R\ xs$
shows *chain* $R'\ xs$
using *assms* **by** (*rule* *chain_lmap[of - - $\lambda x. x$, unfolded* *lmap.ident]*)

lemma *lfinite_chain_imp_rtranclp_lhd_llast*: $lfinite\ xs \Longrightarrow chain\ R\ xs \Longrightarrow R^{**}\ (lhd\ xs)\ (llast\ xs)$
proof (*induct* *rule*: *lfinite.induct*)
case (*lfinite_LConsI* $xs\ x$)
note *fin_xs = this(1)* **and** *ih = this(2)* **and** *r_x_xs = this(3)*
show *?case*
proof (*cases* $xs = LNil$)
case *xs_nnil: False*
then have *r_xs: chain* $R\ xs$
using *r_x_xs* **by** (*blast* *elim*: *chain.cases*)
then show *?thesis*
using *ih[OF r_xs]* *xs_nnil* *r_x_xs*
by (*metis* *chain.cases* *converse_rtranclp_into_rtranclp* *lhd_LCons* *llast_LCons* *chain_not_lnull*
ltsimps(2))
qed *simp*
qed *simp*

lemma *tranclp_imp_exists_finite_chain_list*:
 $R^{++}\ x\ y \Longrightarrow \exists xs. chain\ R\ (lmap_of\ (x\ \# xs\ @\ [y]))$
proof (*induct* *rule*: *tranclp.induct*)
case (*r_into_trancl* $x\ y$)
then have *chain* $R\ (lmap_of\ (x\ \# []\ @\ [y]))$
by (*auto* *intro*: *chain.intros*)
then show *?case*
by *blast*
next
case (*tranclp_into_trancl* $x\ y\ z$)
note *rstar_xy = this(1)* **and** *ih = this(2)* **and** *r_yz = this(3)*
obtain xs **where**
 $xs: chain\ R\ (lmap_of\ (x\ \# xs\ @\ [y]))$
using *ih* **by** *blast*
define ys **where**
 $ys = xs\ @\ [y]$
have *chain* $R\ (lmap_of\ (x\ \# ys\ @\ [z]))$
unfolding *ys_def* **using** *r_yz* *chain_lappend[OF xs* *chain_singleton, of z]*
by (*auto* *simp*: *lappend_lmap_of_LCons* *llast_LCons*)
then show *?case*
by *blast*
qed

inductive-cases *chain_consE*: *chain* $R\ (LCons\ x\ xs)$
inductive-cases *chain_nontrivE*: *chain* $R\ (LCons\ x\ (LCons\ y\ xs))$

primrec *prepend* **where**

$\text{prepend } [] \text{ } ys = ys$
 $\text{prepend } (x \# xs) \text{ } ys = LCons \ x \ (\text{prepend } \ x \ xs \ ys)$

lemma $\text{lnull_prepend}[simp]$: $\text{lnull } (\text{prepend } \ x \ xs \ ys) = (xs = [] \wedge \text{lnull } \ ys)$
by $(\text{induct } \ xs) \ \text{auto}$

lemma $\text{lhs_prepend}[simp]$: $\text{lhs } (\text{prepend } \ x \ xs \ ys) = (\text{if } \ x \neq [] \ \text{then } \ \text{hd } \ x \ \text{else } \ \text{lhs } \ ys)$
by $(\text{induct } \ xs) \ \text{auto}$

lemma $\text{prepend_LNil}[simp]$: $\text{prepend } \ x \ LNil = \text{llist_of } \ x$
by $(\text{induct } \ xs) \ \text{auto}$

lemma $\text{lfinite_prepend}[simp]$: $\text{lfinite } (\text{prepend } \ x \ xs \ ys) \longleftrightarrow \text{lfinite } \ ys$
by $(\text{induct } \ xs) \ \text{auto}$

lemma $\text{llength_prepend}[simp]$: $\text{llength } (\text{prepend } \ x \ xs \ ys) = \text{length } \ x \ + \ \text{llength } \ ys$
by $(\text{induct } \ xs) \ (\text{auto } \ \text{simp: } \ \text{enat_0 } \ \text{iadd_Suc } \ \text{eSuc_enat}[symmetric])$

lemma $\text{llast_prepend}[simp]$: $\neg \ \text{lnull } \ ys \implies \ \text{llast } (\text{prepend } \ x \ xs \ ys) = \text{llast } \ ys$
by $(\text{induct } \ xs) \ (\text{auto } \ \text{simp: } \ \text{llast_LCons})$

lemma prepend_prepend : $\text{prepend } \ x \ (\text{prepend } \ ys \ zs) = \text{prepend } \ (x \ @ \ ys) \ zs$
by $(\text{induct } \ xs) \ \text{auto}$

lemma chain_prepend :
 $\text{chain } \ R \ (\text{llist_of } \ zs) \implies \ \text{last } \ zs = \text{lhs } \ xs \implies \ \text{chain } \ R \ \ xs \implies \ \text{chain } \ R \ (\text{prepend } \ zs \ (\text{tl } \ xs))$
by $(\text{induct } \ zs; \ \text{cases } \ xs)$
 $(\text{auto } \ \text{split: } \ \text{if_splits } \ \text{simp: } \ \text{lnull_def}[symmetric] \ \text{intro!: } \ \text{chain_cons } \ \text{elim!: } \ \text{chain_consE})$

lemma $\text{lmap_prepend}[simp]$: $\text{lmap } \ f \ (\text{prepend } \ x \ xs \ ys) = \text{prepend } \ (\text{map } \ f \ \ x) \ (\text{lmap } \ f \ \ ys)$
by $(\text{induct } \ xs) \ \text{auto}$

lemma $\text{lset_prepend}[simp]$: $\text{lset } (\text{prepend } \ x \ xs \ ys) = \text{set } \ x \ \cup \ \text{lset } \ ys$
by $(\text{induct } \ xs) \ \text{auto}$

lemma prepend_LCons : $\text{prepend } \ x \ (LCons \ y \ ys) = \text{prepend } \ (x \ @ \ [y]) \ ys$
by $(\text{induct } \ xs) \ \text{auto}$

lemma lnth_prepend :
 $\text{lnth } (\text{prepend } \ x \ xs \ ys) \ i = (\text{if } \ i < \ \text{length } \ x \ \text{then } \ \text{nth } \ x \ \ i \ \text{else } \ \text{lnth } \ ys \ (i - \ \text{length } \ x))$
by $(\text{induct } \ xs \ \text{arbitrary: } \ i) \ (\text{auto } \ \text{simp: } \ \text{lnth_LCons}' \ \text{nth_Cons}')$

theorem $\text{lfinite_less_induct}[consumes \ 1, \ \text{case_names } \ \text{less}]$:
assumes $\text{fin: } \ \text{lfinite } \ xs$
and $\text{step: } \ \bigwedge xs. \ \text{lfinite } \ xs \implies \ (\bigwedge zs. \ \text{llength } \ zs < \ \text{llength } \ xs \implies \ P \ zs) \implies \ P \ xs$
shows $P \ xs$
using $\text{fin } \ \text{proof } (\text{induct } \ \text{the_enat } (\text{llength } \ xs) \ \text{arbitrary: } \ xs \ \text{rule: } \ \text{less_induct})$
case $(\text{less } \ xs)$
show $?case$
using $\text{less}(2) \ \text{by } (\text{intro } \ \text{step}[OF \ \text{less}(2)] \ \text{less}(1))$
 $(\text{auto } \ \text{dest!: } \ \text{lfinite_llength_enat } \ \text{simp: } \ \text{eSuc_enat } \ \text{elim!: } \ \text{less_enatE } \ \text{llength_eq_enat_lfiniteD})$
qed

theorem $\text{lfinite_prepend_induct}[consumes \ 1, \ \text{case_names } \ LNil \ \text{prepend}]$:
assumes $\text{lfinite } \ xs$
and $LNil: \ P \ LNil$
and $\text{prepend: } \ \bigwedge xs. \ \text{lfinite } \ xs \implies \ (\bigwedge zs. \ (\exists \ ys. \ xs = \ \text{prepend } \ ys \ zs \wedge \ ys \neq [])) \implies \ P \ zs) \implies \ P \ xs$
shows $P \ xs$
using $\text{assms}(1) \ \text{proof } (\text{induct } \ xs \ \text{rule: } \ \text{lfinite_less_induct})$
case $(\text{less } \ xs)$
from $\text{less}(1) \ \text{show } ?case$
by $(\text{cases } \ xs)$
 $(\text{force } \ \text{simp: } \ LNil \ \text{neq_Nil_conv } \ \text{dest: } \ \text{lfinite_llength_enat } \ \text{intro!: } \ \text{prepend}[of \ LCons \ _ \ _] \ \text{intro: } \ \text{less})+$

qed

coinductive *emb* :: 'a llist \Rightarrow 'a llist \Rightarrow bool **where**
 lfinite *xs* \Longrightarrow *emb* *LNil* *xs*
| *emb* *xs* *ys* \Longrightarrow *emb* (*LCons* *x* *xs*) (*prepend* *zs* (*LCons* *x* *ys*))

inductive-cases *emb.LConsE*: *emb* (*LCons* *z* *zs*) *ys*

inductive-cases *emb.LNil1E*: *emb* *LNil* *ys*

inductive-cases *emb.LNil2E*: *emb* *xs* *LNil*

lemma *emb_lfinite*:

assumes *emb* *xs* *ys*

shows *lfinite* *ys* \longleftrightarrow *lfinite* *xs*

proof

assume *lfinite* *xs*

then show *lfinite* *ys* **using** *assms*

by (*induct* *xs* *arbitrary*: *ys* *rule*: *lfinite_induct*)

 (*auto simp*: *lnull_def* *neq_LNil_conv* *elim!*: *emb.LNil1E* *emb.LConsE*)

next

assume *lfinite* *ys*

then show *lfinite* *xs* **using** *assms*

proof (*induction* *ys* *arbitrary*: *xs* *rule*: *lfinite_less_induct*)

case (*less* *ys*)

from *less.prem*s (*lfinite* *ys*) **show** *?case*

by (*cases* *xs*)

 (*auto simp*: *eSuc_enat* *elim!*: *emb.LNil1E* *emb.LConsE* *less.IH*[*rotated*] *dest!*: *lfinite_llength_enat*)

qed

qed

inductive *prepend_cong1* **for** *X* **where**

prepend_cong1_base: *X* *xs* \Longrightarrow *prepend_cong1* *X* *xs*

| *prepend_cong1_prepend*: *prepend_cong1* *X* *ys* \Longrightarrow *prepend_cong1* *X* (*prepend* *xs* *ys*)

lemma *emb_prepend_coinduct*[*rotated*, *case_names* *emb*]:

assumes ($\bigwedge x1\ x2. X\ x1\ x2 \Longrightarrow$

 ($\exists xs. x1 = LNil \wedge x2 = xs \wedge lfinite\ xs$)

$\vee (\exists xs\ ys\ x\ zs. x1 = LCons\ x\ xs \wedge x2 = prepend\ zs\ (LCons\ x\ ys)$

$\wedge (prepend_cong1\ (X\ xs)\ ys \vee emb\ xs\ ys)))$ (**is** $\bigwedge x1\ x2. X\ x1\ x2 \Longrightarrow ?bisim\ x1\ x2$)

shows *X* *x1* *x2* \Longrightarrow *emb* *x1* *x2*

proof (*erule* *emb.coinduct*[*OF* *prepend_cong1_base*])

fix *xs* *zs*

assume *prepend_cong1* (*X* *xs*) *zs*

then show *?bisim* *xs* *zs*

by (*induct* *zs* *rule*: *prepend_cong1.induct*) (*erule* *assms*, *force simp*: *prepend_prepend*)

qed

context

begin

private coinductive *chain'* **for** *R* **where**

chain' *R* (*LCons* *x* *LNil*)

| *chain* *R* (*llist_of* (*x* # *zs* @ [*lhd* *xs*])) \Longrightarrow

chain' *R* *xs* \Longrightarrow *chain'* *R* (*LCons* *x* (*prepend* *zs* *xs*))

private lemma *chain_imp_chain'*: *chain* *R* *xs* \Longrightarrow *chain'* *R* *xs*

proof (*coinduction* *arbitrary*: *xs* *rule*: *chain'.coinduct*)

case *chain'*

then show *?case*

proof (*cases* *rule*: *chain.cases*)

case (*chain_cons* *zs* *z*)

then show *?thesis*

by (*intro* *disjI2* *exI*[*of* - *z*] *exI*[*of* - []] *exI*[*of* - *zs*])

 (*auto* *intro*: *chain.intros*)

qed simp
qed

private lemma *chain'_imp_chain*: $chain' R xs \implies chain R xs$
proof (*coinduction arbitrary*: *xs* rule: *chain.coinduct*)
 case *chain*
 then show ?*case*
proof (*cases rule*: *chain'.cases*)
 case (\mathcal{Q} *y zs ys*)
 then show ?*thesis*
 by (*intro disjI2 exI[of _ prepend zs ys] exI[of _ y]*)
 (*force dest!*: *neq_Nil_conv[THEN iffD1] elim*: *chain.cases chain_nontrivE*
intro: *chain'.intros*)
 qed simp
 qed

private lemma *chain_chain'*: $chain = chain'$
 unfolding *fun_eq_iff* by (*metis chain_imp_chain' chain'_imp_chain*)

lemma *chain_prepend_coinduct*[*case_names chain*]:
 $X x \implies (\bigwedge x. X x \implies$
 $(\exists z. x = LCons z LNil) \vee$
 $(\exists y xs zs. x = LCons y (prepend zs xs) \wedge$
 $(X xs \vee chain R xs) \wedge chain R (llist_of (y \# zs @ [lhd xs]))) \implies chain R x$
 by (*subst chain_chain'*, *erule chain'.coinduct*) (*force simp*: *chain_chain'*)

end

context

fixes *R* :: 'a \Rightarrow 'a \Rightarrow bool
 begin

private definition *pick* where

pick *x y* = (*SOME xs. chain R (llist_of (x \# xs @ [y]))*)

private lemma *pick*[*simp*]:

assumes $R^{++} x y$

shows $chain R (llist_of (x \# pick x y @ [y]))$

unfolding *pick_def* using *tranclp_imp_exists_finite_chain_list[THEN someI_ex, OF assms]* by *auto*

private friend-of-corec *prepend* where

prepend xs ys = (*case xs of* [] \Rightarrow

(*case ys of* LNil \Rightarrow LNil | LCons *x xs* \Rightarrow LCons *x xs*) | *x \# xs'* \Rightarrow LCons *x (prepend xs' ys)*)

by (*simp split*: *list.splits llist.splits*) *transfer_prover*

private corec *wit* where

wit xs = (*case xs of* LCons *x (LCons y xs)* \Rightarrow

LCons *x (prepend (pick x y) (wit (LCons y xs)))* | *_* \Rightarrow *xs*)

private lemma

wit_LNil[*simp*]: $wit LNil = LNil$ and

wit_singleton[*simp*]: $wit (LCons x LNil) = LCons x LNil$ and

wit_LCons2: $wit (LCons x (LCons y xs)) =$

(LCons *x (prepend (pick x y) (wit (LCons y xs)))*)

by (*subst wit.code*; *auto*)⁺

private lemma *lnull_wit*[*simp*]: $lnull (wit xs) \longleftrightarrow lnull xs$

by (*subst wit.code*) (*auto split*: *list.splits simp*: *Let_def*)

private lemma *lhd_wit*[*simp*]: $chain R^{++} xs \implies lhd (wit xs) = lhd xs$

by (*erule chain.cases*; *subst wit.code*) (*auto split*: *llist.splits simp*: *Let_def*)

private lemma *LNil_eq_iff_lnull*: $LNil = xs \longleftrightarrow lnull xs$

```

by (cases xs) auto

lemma emb_wit[simp]: chain R++ xs  $\implies$  emb xs (wit xs)
proof (coinduction arbitrary: xs rule: emb_prepend_coinduct)
  case (emb xs)
  then show ?case
  proof (cases rule: chain.cases)
    case (chain_cons zs z)
    then show ?thesis
    by (subst (2) wit.code)
      (auto split: llist.splits intro!: exI[of _ []] exI[of _ _ :: _ llist]
        prepend_cong1_prepend[OF prepend_cong1_base])
  qed (auto intro!: exI[of _ LNil] exI[of _ []] emb.intros)
qed

private lemma lfinite_wit[simp]:
  assumes chain R++ xs
  shows lfinite (wit xs)  $\longleftrightarrow$  lfinite xs
  using emb_wit emb_lfinite assms by blast

private lemma llast_wit[simp]:
  assumes chain R++ xs
  shows llast (wit xs) = llast xs
proof (cases lfinite xs)
  case True
  from this assms show ?thesis
  proof (induct rule: lfinite.induct)
    case (lfinite_LConsI xs x)
    then show ?case
    by (cases xs) (auto simp: wit_LCons2 llast_LCons elim: chain_nontrivE)
  qed auto
qed (auto simp: llast_lfinite assms)

lemma chain_tranclp_imp_exists_chain:
  chain R++ xs  $\implies$ 
   $\exists$  ys. chain R ys  $\wedge$  emb xs ys  $\wedge$  lhd ys = lhd xs  $\wedge$  llast ys = llast xs
proof (intro exI[of _ wit xs] conjI, coinduction arbitrary: xs rule: chain_prepend_coinduct)
  case chain
  then show ?case
  by (subst (1 2) wit.code) (erule chain.cases; force split: llist.splits dest: pick)
qed auto

lemma emb_lset_mono[rotated]: x  $\in$  lset xs  $\implies$  emb xs ys  $\implies$  x  $\in$  lset ys
  by (induct x xs arbitrary: ys rule: llist.set_induct) (auto elim!: emb_LConsE)

lemma emb_Ball_lset_antimono:
  assumes emb Xs Ys
  shows  $\forall Y \in$  lset Ys. x  $\in$  Y  $\implies$   $\forall X \in$  lset Xs. x  $\in$  X
  using emb_lset_mono[OF assms] by blast

lemma emb_lfinite_antimono[rotated]: lfinite ys  $\implies$  emb xs ys  $\implies$  lfinite xs
  by (induct ys arbitrary: xs rule: lfinite_prepend_induct)
  (force elim!: emb_LNil2E simp: LNil_eq_iff_lnull prepend_LCons elim: emb.cases)+

lemma emb_Liminf_llist_mono_aux:
  assumes emb Xs Ys and  $\neg$  lfinite Xs and  $\neg$  lfinite Ys and  $\forall j \geq i$ . x  $\in$  lnth Ys j
  shows  $\forall j \geq i$ . x  $\in$  lnth Xs j
  using assms proof (induct i arbitrary: Xs Ys rule: less_induct)
  case (less i)
  then show ?case
  proof (cases i)
    case 0
    then show ?thesis
  end
end

```

```

using emb_Ball.lset_antimono[OF less(2), of x] less(5)
unfolding Ball_def in_lset_conv_lnth simp_thms
  not_lfinite_llength[OF less(3)] not_lfinite_llength[OF less(4)] enat_ord_code subset_eq
by blast
next
case [simp]: (Suc nat)
from less(2,3) obtain xs as b bs where
  [simp]: Xs = LCons b xs Ys = prepend as (LCons b bs) and emb xs bs
by (auto elim: emb.cases)
have IH:  $\forall k \geq j. x \in \text{lnth } xs \ k$  if  $\forall k \geq j. x \in \text{lnth } bs \ k \ j < i$  for  $j$ 
using that less(1)[OF  $\_ \langle emb \ xs \ bs \rangle$ ] less(3,4) by auto
from less(5) have  $\forall k \geq i - \text{length } as - 1. x \in \text{lnth } xs \ k$ 
by (intro IH allI)
  (drule spec[of  $\_ - + \text{length } as + 1$ ], auto simp: lnth_prepend lnth_LCons')
then show ?thesis
by (auto simp: lnth_LCons')
qed
qed

lemma emb_Liminf_llist_infinite:
  assumes emb Xs Ys and  $\neg \text{lfinite } Xs$ 
  shows  $\text{Liminf\_llist } Ys \subseteq \text{Liminf\_llist } Xs$ 
proof -
  from assms have  $\neg \text{lfinite } Ys$ 
  using emb_lfinite_antimono by blast
  with assms show ?thesis
  unfolding Liminf_llist_def by (auto simp: not_lfinite_llength dest: emb_Liminf_llist_mono_aux)
qed

lemma emb_lmap:  $\text{emb } xs \ ys \implies \text{emb } (\text{lmap } f \ xs) (\text{lmap } f \ ys)$ 
proof (coinduction arbitrary: xs ys rule: emb.coinduct)
  case emb
  show ?case
  proof (cases xs)
    case xs: (LCons x xs')
    obtain ysa0 and zs0 where
      ys:  $ys = \text{prepend } zs0 \ (\text{LCons } x \ ysa0)$  and
      emb':  $\text{emb } xs' \ ysa0$ 
    using emb_LConsE[OF emb[unfolded xs]] by metis

    let ?xa = f x
    let ?xsa = lmap f xs'
    let ?zs = map f zs0
    let ?ysa = lmap f ysa0

    have lmap f xs = LCons ?xa ?xsa
      unfolding xs by simp
    moreover have lmap f ys = prepend ?zs (LCons ?xa ?ysa)
      unfolding ys by simp
    moreover have  $\exists xsa \ ysa. ?xsa = \text{lmap } f \ xsa \wedge ?ysa = \text{lmap } f \ ysa \wedge \text{emb } xsa \ ysa$ 
      using emb' by blast
    ultimately show ?thesis
      by blast
  qed (simp add: emb_lfinite[OF emb])
qed

end

lemma chain_inf_llist_if_infinite_chain_function:
  assumes  $\forall i. r \ (f \ (\text{Suc } i)) \ (f \ i)$ 
  shows  $\neg \text{lfinite } (\text{inf\_llist } f) \wedge \text{chain } r^{-1-1} \ (\text{inf\_llist } f)$ 
  using assms by (simp add: lnth_rel_chain)

```

lemma *infinite_chain_function_iff_infinite_chain_llist*:
 $(\exists f. \forall i. r (f (Suc i)) (f i)) \longleftrightarrow (\exists c. \neg lfinite\ c \wedge chain\ r^{-1-1}\ c)$
using *chain_inf_llist_if_infinite_chain_function infinite_chain_lnth_rel* **by** *blast*

lemma *wfP_iff_no_infinite_down_chain_llist*: $wfP\ r \longleftrightarrow (\nexists c. \neg lfinite\ c \wedge chain\ r^{-1-1}\ c)$

proof –

have $wfP\ r \longleftrightarrow wf\ \{(x, y). r\ x\ y\}$
unfolding *wfP_def* **by** *auto*
also have $\dots \longleftrightarrow (\nexists f. \forall i. (f (Suc\ i), f\ i) \in \{(x, y). r\ x\ y\})$
using *wf_iff_no_infinite_down_chain* **by** *blast*
also have $\dots \longleftrightarrow (\nexists f. \forall i. r (f (Suc\ i)) (f\ i))$
by *auto*
also have $\dots \longleftrightarrow (\nexists c. \neg lfinite\ c \wedge chain\ r^{-1-1}\ c)$
using *infinite_chain_function_iff_infinite_chain_llist* **by** *blast*
finally show *?thesis*
by *auto*

qed

4.2 Full Chains

coinductive *full_chain* :: $('a \Rightarrow 'a \Rightarrow bool) \Rightarrow 'a\ list \Rightarrow bool$ **for** $R :: 'a \Rightarrow 'a \Rightarrow bool$ **where**
full_chain_singleton: $(\forall y. \neg R\ x\ y) \Longrightarrow full_chain\ R\ (LCons\ x\ LNil)$
| *full_chain_cons*: $full_chain\ R\ xs \Longrightarrow R\ x\ (lhd\ xs) \Longrightarrow full_chain\ R\ (LCons\ x\ xs)$

lemma

full_chain_LNil[simp]: $\neg full_chain\ R\ LNil$ **and**
full_chain_not_lnull: $full_chain\ R\ xs \Longrightarrow \neg lnull\ xs$
by (*auto elim: full_chain.cases*)

lemma *full_chain_ldroprn*:

assumes *full*: $full_chain\ R\ xs$ **and** *enat* $n < llength\ xs$
shows $full_chain\ R\ (ldroprn\ n\ xs)$
using *assms*
by (*induct n arbitrary: xs, simp,*
metis full_chain.cases ldroprn_eSuc_ltl ldroprn_LNil ldroprn_eq_LNil ltl_simps(2) not_less)

lemma *full_chain_iff_chain*:

$full_chain\ R\ xs \longleftrightarrow chain\ R\ xs \wedge (lfinite\ xs \longrightarrow (\forall y. \neg R\ (llast\ xs)\ y))$

proof (*intro iffI conjI impI allI; (elim conjE)?*)

assume *full*: $full_chain\ R\ xs$

show *chain*: $chain\ R\ xs$

using *full* **by** (*coinduction arbitrary: xs*) (*auto elim: full_chain.cases*)

{

fix *y*

assume *lfinite xs*

then obtain *n* **where**

suc_n: $Suc\ n = llength\ xs$

by (*metis chain chain_length_pos lessE less_enatE lfinite_conv_llength_enat*)

have $full_chain\ R\ (ldroprn\ n\ xs)$

by (*rule full_chain_ldroprn[OF full]*) (*use suc_n Suc_ile_eq in force*)

moreover have $ldroprn\ n\ xs = LCons\ (llast\ xs)\ LNil$

using *suc_n* **by** (*metis enat_le_plus_same(2) enat_ord_simps(2) gen_llength_def*

ldroprn_Suc_conv_ldroprn_all lessI llast_ldroprn llast_singleton llength_code)

ultimately show $\neg R\ (llast\ xs)\ y$

by (*auto elim: full_chain.cases*)

}

next

assume

chain R xs **and**

lfinite xs $\longrightarrow (\forall y. \neg R\ (llast\ xs)\ y)$

```

then show full_chain R xs
  by (coinduction arbitrary: xs) (erule chain.cases, simp, metis lfinite_LConsI llast_LCons)
qed

```

```

lemma full_chain_imp_chain: full_chain R xs  $\implies$  chain R xs
  using full_chain_iff_chain by blast

```

```

lemma full_chain_length_pos: full_chain R xs  $\implies$  llength xs > 0
  by (fact chain_length_pos[OF full_chain_imp_chain])

```

```

lemma full_chain_lnth_rel:
  full_chain R xs  $\implies$  enat (Suc j) < llength xs  $\implies$  R (lnth xs j) (lnth xs (Suc j))
  by (fact chain_lnth_rel[OF full_chain_imp_chain])

```

```

inductive-cases full_chain_consE: full_chain R (LCons x xs)
inductive-cases full_chain_nontrivE: full_chain R (LCons x (LCons y xs))

```

```

lemma full_chain_tranclp_imp_exists_full_chain:
  assumes full: full_chain R++ xs
  shows  $\exists$  ys. full_chain R ys  $\wedge$  emb xs ys  $\wedge$  lhd ys = lhd xs  $\wedge$  llast ys = llast xs
proof –
  obtain ys where ys:
    chain R ys emb xs ys lhd ys = lhd xs llast ys = llast xs
  using full_chain_imp_chain[OF full] chain_tranclp_imp_exists_chain by blast
  have full_chain R ys
  using ys(1,4) emb_lfinite[OF ys(2)] full unfolding full_chain_iff_chain by auto
  then show ?thesis
  using ys(2-4) by auto
qed

```

end

5 Clausal Logic

```

theory Clausal_Logic
  imports Nested_Multisets_Ordinals.Multiset_More
begin

```

Resolution operates on clauses, which are disjunctions of literals. The material formalized here corresponds roughly to Sections 2.1 (“Formulas and Clauses”) of Bachmair and Ganzinger, excluding the formula and term syntax.

5.1 Literals

Literals consist of a polarity (positive or negative) and an atom, of type $'a$.

```

datatype 'a literal =
  is_pos: Pos (atm_of: 'a)
| Neg (atm_of: 'a)

```

```

abbreviation is_neg :: 'a literal  $\Rightarrow$  bool where
  is_neg L  $\equiv$   $\neg$  is_pos L

```

```

lemma Pos_atm_of_iff[simp]: Pos (atm_of L) = L  $\longleftrightarrow$  is_pos L
  by (cases L) simp+

```

```

lemma Neg_atm_of_iff[simp]: Neg (atm_of L) = L  $\longleftrightarrow$  is_neg L
  by (cases L) simp+

```

```

lemma set_literal_atm_of: set_literal L = {atm_of L}
  by (cases L) simp+

```

```

lemma ex_lit_cases:  $(\exists L. P L) \longleftrightarrow (\exists A. P (Pos A) \vee P (Neg A))$ 

```



```

by (metis literal.exhaust)

instantiation literal :: (type) uminus
begin

definition uminus_literal :: 'a literal  $\Rightarrow$  'a literal where
  uminus L = (if is_pos L then Neg else Pos) (atm_of L)

instance ..

end

lemma
  uminus_Pos[simp]:  $- Pos A = Neg A$  and
  uminus_Neg[simp]:  $- Neg A = Pos A$ 
  unfolding uminus_literal_def by simp_all

lemma atm_of_uminus[simp]:  $atm\_of (-L) = atm\_of L$ 
  by (case_tac L, auto)

lemma uminus_of_uminus_id[simp]:  $- (- (x :: 'v literal)) = x$ 
  by (simp add: uminus_literal_def)

lemma uminus_not_id[simp]:  $x \neq - (x :: 'v literal)$ 
  by (case_tac x) auto

lemma uminus_not_id'[simp]:  $- x \neq (x :: 'v literal)$ 
  by (case_tac x, auto)

lemma uminus_eq_inj[iff]:  $- (a :: 'v literal) = - b \longleftrightarrow a = b$ 
  by (case_tac a; case_tac b) auto+

lemma uminus_lit_swap:  $(a :: 'a literal) = - b \longleftrightarrow - a = b$ 
  by auto

lemma is_pos_neg_not_is_pos:  $is\_pos (- L) \longleftrightarrow \neg is\_pos L$ 
  by (cases L) auto

instantiation literal :: (preorder) preorder
begin

definition less_literal :: 'a literal  $\Rightarrow$  'a literal  $\Rightarrow$  bool where
  less_literal L M  $\longleftrightarrow atm\_of L < atm\_of M \vee atm\_of L \leq atm\_of M \wedge is\_neg L < is\_neg M$ 

definition less_eq_literal :: 'a literal  $\Rightarrow$  'a literal  $\Rightarrow$  bool where
  less_eq_literal L M  $\longleftrightarrow atm\_of L < atm\_of M \vee atm\_of L \leq atm\_of M \wedge is\_neg L \leq is\_neg M$ 

instance
  apply intro_classes
  unfolding less_literal_def less_eq_literal_def by (auto intro: order_trans simp: less_le_not_le)

end

instantiation literal :: (order) order
begin

instance
  by intro_classes (auto simp: less_eq_literal_def intro: literal.expand)

end

lemma pos_less_neg[simp]:  $Pos A < Neg A$ 
  unfolding less_literal_def by simp

```

```

lemma pos_less_pos_iff[simp]: Pos A < Pos B  $\longleftrightarrow$  A < B
  unfolding less_literal_def by simp

lemma pos_less_neg_iff[simp]: Pos A < Neg B  $\longleftrightarrow$  A  $\leq$  B
  unfolding less_literal_def by (auto simp: less_le_not_le)

lemma neg_less_pos_iff[simp]: Neg A < Pos B  $\longleftrightarrow$  A < B
  unfolding less_literal_def by simp

lemma neg_less_neg_iff[simp]: Neg A < Neg B  $\longleftrightarrow$  A < B
  unfolding less_literal_def by simp

lemma pos_le_neg[simp]: Pos A  $\leq$  Neg A
  unfolding less_eq_literal_def by simp

lemma pos_le_pos_iff[simp]: Pos A  $\leq$  Pos B  $\longleftrightarrow$  A  $\leq$  B
  unfolding less_eq_literal_def by (auto simp: less_le_not_le)

lemma pos_le_neg_iff[simp]: Pos A  $\leq$  Neg B  $\longleftrightarrow$  A  $\leq$  B
  unfolding less_eq_literal_def by (auto simp: less_imp_le)

lemma neg_le_pos_iff[simp]: Neg A  $\leq$  Pos B  $\longleftrightarrow$  A < B
  unfolding less_eq_literal_def by simp

lemma neg_le_neg_iff[simp]: Neg A  $\leq$  Neg B  $\longleftrightarrow$  A  $\leq$  B
  unfolding less_eq_literal_def by (auto simp: less_imp_le)

lemma leq_imp_less_eq_atm_of: L  $\leq$  M  $\implies$  atm_of L  $\leq$  atm_of M
  unfolding less_eq_literal_def using less_imp_le by blast

instantiation literal :: (linorder) linorder
begin

instance
  apply intro_classes
  unfolding less_eq_literal_def less_literal_def by auto

end

instantiation literal :: (wellorder) wellorder
begin

instance
proof intro_classes
  fix P :: 'a literal  $\Rightarrow$  bool and L :: 'a literal
  assume ih:  $\bigwedge L. (\bigwedge M. M < L \implies P M) \implies P L$ 
  have  $\bigwedge x. (\bigwedge y. y < x \implies P (Pos y) \wedge P (Neg y)) \implies P (Pos x) \wedge P (Neg x)$ 
    by (rule conjI[OF ih])
    (auto simp: less_literal_def atm_of_def split: literal.splits intro: ih)
  then have  $\bigwedge A. P (Pos A) \wedge P (Neg A)$ 
    by (rule less_induct) blast
  then show P L
    by (cases L) simp+
qed

end

```

5.2 Clauses

Clauses are (finite) multisets of literals.

type-synonym 'a clause = 'a literal multiset

abbreviation *map_clause* :: ('a ⇒ 'b) ⇒ 'a clause ⇒ 'b clause **where**
map_clause f ≡ *image_mset* (map_literal f)

abbreviation *rel_clause* :: ('a ⇒ 'b ⇒ bool) ⇒ 'a clause ⇒ 'b clause ⇒ bool **where**
rel_clause R ≡ *rel_mset* (rel_literal R)

abbreviation *poss* :: 'a multiset ⇒ 'a clause **where** *poss* AA ≡ {#Pos A. A ∈# AA#}

abbreviation *negs* :: 'a multiset ⇒ 'a clause **where** *negs* AA ≡ {#Neg A. A ∈# AA#}

lemma *Max_in_lits*: $C \neq \{\#\} \implies \text{Max_mset } C \in\# C$
by *simp*

lemma *Max_atm_of_set_mset_commute*: $C \neq \{\#\} \implies \text{Max } (\text{atm_of } ' \text{ set_mset } C) = \text{atm_of } (\text{Max_mset } C)$
by (rule *mono_Max_commute[symmetric]*) (auto *simp*: *mono_def less_eq_literal_def*)

lemma *Max_pos_neg_less_multiset*:
assumes *max*: $\text{Max_mset } C = \text{Pos } A$ **and** *neg*: $\text{Neg } A \in\# D$
shows $C < D$

proof –

have $\text{Max_mset } C < \text{Neg } A$
using *max* **by** *simp*

then show ?thesis

using *neg* **by** (*metis* (*no_types*) *Max_less_iff empty_iff ex_gt_imp_less_multiset finite_set_mset*)

qed

lemma *pos_Max_imp_neg_notin*: $\text{Max_mset } C = \text{Pos } A \implies \text{Neg } A \notin\# C$
using *Max_pos_neg_less_multiset* **by** *blast*

lemma *less_eq_Max_lit*: $C \neq \{\#\} \implies C \leq D \implies \text{Max_mset } C \leq \text{Max_mset } D$

proof (*unfold less_eq_multiset_HO*)

assume

ne: $C \neq \{\#\}$ **and**

ex_gt: $\forall x. \text{count } D x < \text{count } C x \longrightarrow (\exists y > x. \text{count } C y < \text{count } D y)$

from *ne* **have** $\text{Max_mset } C \in\# C$

by (*fast intro*: *Max_in_lits*)

then have $\exists l. l \in\# D \wedge \neg l < \text{Max_mset } C$

using *ex_gt* **by** (*metis* *count_greater_zero_iff count_inI less_not_sym*)

then have $\neg \text{Max_mset } D < \text{Max_mset } C$

by (*metis* *Max.coboundedI[OF finite_set_mset]* *le_less_trans*)

then show ?thesis

by *simp*

qed

definition *atms_of* :: 'a clause ⇒ 'a set **where**
atms_of C = *atm_of* ' set_mset C

lemma *atms_of_empty[simp]*: *atms_of* {#} = {}
unfolding *atms_of_def* **by** *simp*

lemma *atms_of_singleton[simp]*: *atms_of* {#L#} = {*atm_of* L}
unfolding *atms_of_def* **by** *auto*

lemma *atms_of_add_mset[simp]*: *atms_of* (add_mset a A) = insert (*atm_of* a) (*atms_of* A)
unfolding *atms_of_def* **by** *auto*

lemma *atms_of_union_mset[simp]*: *atms_of* (A ∪# B) = *atms_of* A ∪ *atms_of* B
unfolding *atms_of_def* **by** *auto*

lemma *finite_atms_of[iff]*: *finite* (*atms_of* C)
by (*simp add*: *atms_of_def*)

lemma *atm_of_lit_in_atms_of*: $L \in\# C \implies \text{atm_of } L \in \text{atms_of } C$
by (*simp add*: *atms_of_def*)

lemma *atms_of_plus*[simp]: $\text{atms_of } (C + D) = \text{atms_of } C \cup \text{atms_of } D$
unfolding *atms_of_def* **by** *auto*

lemma *in_atms_of_minusD*: $x \in \text{atms_of } (A - B) \implies x \in \text{atms_of } A$
by (*auto simp: atms_of_def dest: in_diffD*)

lemma *pos_lit_in_atms_of*: $\text{Pos } A \in\# C \implies A \in \text{atms_of } C$
unfolding *atms_of_def* **by** *force*

lemma *neg_lit_in_atms_of*: $\text{Neg } A \in\# C \implies A \in \text{atms_of } C$
unfolding *atms_of_def* **by** *force*

lemma *atm_imp_pos_or_neg_lit*: $A \in \text{atms_of } C \implies \text{Pos } A \in\# C \vee \text{Neg } A \in\# C$
unfolding *atms_of_def image_def mem_Collect_eq* **by** (*metis Neg_atm_of_iff Pos_atm_of_iff*)

lemma *atm_iff_pos_or_neg_lit*: $A \in \text{atms_of } L \iff \text{Pos } A \in\# L \vee \text{Neg } A \in\# L$
by (*auto intro: pos_lit_in_atms_of neg_lit_in_atms_of dest: atm_imp_pos_or_neg_lit*)

lemma *atm_of_eq_atm_of*: $\text{atm_of } L = \text{atm_of } L' \iff (L = L' \vee L = -L')$
by (*cases L; cases L'*) *auto*

lemma *atm_of_in_atm_of_set_iff_in_set_or_uminus_in_set*: $\text{atm_of } L \in \text{atm_of } I \iff (L \in I \vee -L \in I)$
by (*auto intro: rev_image_eqI simp: atm_of_eq_atm_of*)

lemma *lits_subseteq_imp_atms_subseteq*: $\text{set_mset } C \subseteq \text{set_mset } D \implies \text{atms_of } C \subseteq \text{atms_of } D$
unfolding *atms_of_def* **by** *blast*

lemma *atms_empty_iff_empty*[iff]: $\text{atms_of } C = \{\} \iff C = \{\#\}$
unfolding *atms_of_def image_def Collect_empty_eq* **by** *auto*

lemma
atms_of_poss[simp]: $\text{atms_of } (\text{poss } AA) = \text{set_mset } AA$ **and**
atms_of_negs[simp]: $\text{atms_of } (\text{negs } AA) = \text{set_mset } AA$
unfolding *atms_of_def image_def* **by** *auto*

lemma *less_eq_Max_atms_of*: $C \neq \{\#\} \implies C \leq D \implies \text{Max } (\text{atms_of } C) \leq \text{Max } (\text{atms_of } D)$
unfolding *atms_of_def*
by (*metis Max_atm_of_set_mset_commute leq_imp_less_eq_atm_of less_eq_Max_lit less_eq_multiset_empty_right*)

lemma *le_multiset_Max_in_imp_Max*:
 $\text{Max } (\text{atms_of } D) = A \implies C \leq D \implies A \in \text{atms_of } C \implies \text{Max } (\text{atms_of } C) = A$
by (*metis Max_coboundedI[OF finite_atms_of] atm_of_def empty_iff eq_iff image_subsetI less_eq_Max_atms_of set_mset_empty subset_Cmpl_self_eq*)

lemma *atm_of_Max_lit*[simp]: $C \neq \{\#\} \implies \text{atm_of } (\text{Max_mset } C) = \text{Max } (\text{atms_of } C)$
unfolding *atms_of_def Max_atm_of_set_mset_commute* **..**

lemma *Max_lit_eq_pos_or_neg_Max_atm*:
 $C \neq \{\#\} \implies \text{Max_mset } C = \text{Pos } (\text{Max } (\text{atms_of } C)) \vee \text{Max_mset } C = \text{Neg } (\text{Max } (\text{atms_of } C))$
by (*metis Neg_atm_of_iff Pos_atm_of_iff atm_of_Max_lit*)

lemma *atms_less_imp_lit_less_pos*: $(\bigwedge B. B \in \text{atms_of } C \implies B < A) \implies L \in\# C \implies L < \text{Pos } A$
unfolding *atms_of_def less_literal_def* **by** *force*

lemma *atms_less_eq_imp_lit_less_eq_neg*: $(\bigwedge B. B \in \text{atms_of } C \implies B \leq A) \implies L \in\# C \implies L \leq \text{Neg } A$
unfolding *less_eq_literal_def* **by** (*simp add: atm_of_lit_in_atms_of*)

end

6 Herbrand Intepretation

```
theory Herbrand_Interpretation
  imports Clausal_Logic
begin
```

The material formalized here corresponds roughly to Sections 2.2 (“Herbrand Interpretations”) of Bachmair and Ganzinger, excluding the formula and term syntax.

A Herbrand interpretation is a set of ground atoms that are to be considered true.

```
type-synonym 'a interp = 'a set
```

```
definition true_lit :: 'a interp  $\Rightarrow$  'a literal  $\Rightarrow$  bool (infix  $\models_l$  50) where
  I  $\models_l$  L  $\longleftrightarrow$  (if is_pos L then  $(\lambda P. P)$  else Not) (atm_of L  $\in$  I)
```

```
lemma true_lit_simps[simp]:
  I  $\models_l$  Pos A  $\longleftrightarrow$  A  $\in$  I
  I  $\models_l$  Neg A  $\longleftrightarrow$  A  $\notin$  I
  unfolding true_lit_def by auto
```

```
lemma true_lit_iff[iff]: I  $\models_l$  L  $\longleftrightarrow$   $(\exists A. L = \text{Pos } A \wedge A \in I \vee L = \text{Neg } A \wedge A \notin I)$ 
  by (cases L) simp+
```

```
definition true_cls :: 'a interp  $\Rightarrow$  'a clause  $\Rightarrow$  bool (infix  $\models$  50) where
  I  $\models$  C  $\longleftrightarrow$   $(\exists L \in \# C. I \models_l L)$ 
```

```
lemma true_cls_empty[iff]:  $\neg I \models \{\#\}$ 
  unfolding true_cls_def by simp
```

```
lemma true_cls_singleton[iff]: I  $\models \{\#L\#\} \longleftrightarrow I \models_l L$ 
  unfolding true_cls_def by simp
```

```
lemma true_cls_add_mset[iff]: I  $\models$  add_mset C D  $\longleftrightarrow$  I  $\models_l$  C  $\vee$  I  $\models$  D
  unfolding true_cls_def by auto
```

```
lemma true_cls_union[iff]: I  $\models$  C + D  $\longleftrightarrow$  I  $\models$  C  $\vee$  I  $\models$  D
  unfolding true_cls_def by auto
```

```
lemma true_cls_mono: set_mset C  $\subseteq$  set_mset D  $\Longrightarrow$  I  $\models$  C  $\Longrightarrow$  I  $\models$  D
  unfolding true_cls_def subset_eq by metis
```

```
lemma
  assumes I  $\subseteq$  J
  shows
    false_to_true_imp_ex_pos:  $\neg I \models C \Longrightarrow J \models C \Longrightarrow \exists A \in J. \text{Pos } A \in \# C$  and
    true_to_false_imp_ex_neg: I  $\models C \Longrightarrow \neg J \models C \Longrightarrow \exists A \in J. \text{Neg } A \in \# C$ 
  using assms unfolding subset_iff true_cls_def by (metis literal.collapse true_lit_simps)+
```

```
lemma true_cls_replicate_mset[iff]: I  $\models$  replicate_mset n L  $\longleftrightarrow$   $n \neq 0 \wedge I \models_l L$ 
  by (simp add: true_cls_def)
```

```
lemma pos_literal_in_imp_true_cls[intro]: Pos A  $\in \# C \Longrightarrow A \in I \Longrightarrow I \models C$ 
  using true_cls_def by blast
```

```
lemma neg_literal_notin_imp_true_cls[intro]: Neg A  $\in \# C \Longrightarrow A \notin I \Longrightarrow I \models C$ 
  using true_cls_def by blast
```

```
lemma pos_neg_in_imp_true: Pos A  $\in \# C \Longrightarrow$  Neg A  $\in \# C \Longrightarrow I \models C$ 
  using true_cls_def by blast
```

```
definition true_cls :: 'a interp  $\Rightarrow$  'a clause set  $\Rightarrow$  bool (infix  $\models_s$  50) where
  I  $\models_s$  CC  $\longleftrightarrow$   $(\forall C \in CC. I \models C)$ 
```

```
lemma true_cls_empty[iff]: I  $\models_s$   $\{\}$ 
```

by (simp add: true_cls_def)

lemma true_cls_singleton[iff]: $I \models_s \{C\} \longleftrightarrow I \models C$
unfolding true_cls_def **by** blast

lemma true_cls_insert[iff]: $I \models_s \text{insert } C \ DD \longleftrightarrow I \models C \wedge I \models_s DD$
unfolding true_cls_def **by** blast

lemma true_cls_union[iff]: $I \models_s CC \cup DD \longleftrightarrow I \models_s CC \wedge I \models_s DD$
unfolding true_cls_def **by** blast

lemma true_cls_mono: $DD \subseteq CC \implies I \models_s CC \implies I \models_s DD$
by (simp add: set_mp true_cls_def)

abbreviation satisfiable :: 'a clause set \Rightarrow bool **where**
satisfiable CC $\equiv \exists I. I \models_s CC$

definition true_cls_mset :: 'a interp \Rightarrow 'a clause multiset \Rightarrow bool (**infix** \models_m 50) **where**
 $I \models_m CC \longleftrightarrow (\forall C \in\# CC. I \models C)$

lemma true_cls_mset_empty[iff]: $I \models_m \{\#\}$
unfolding true_cls_mset_def **by** auto

lemma true_cls_mset_singleton[iff]: $I \models_m \{\#C\#\} \longleftrightarrow I \models C$
by (simp add: true_cls_mset_def)

lemma true_cls_mset_union[iff]: $I \models_m CC + DD \longleftrightarrow I \models_m CC \wedge I \models_m DD$
unfolding true_cls_mset_def **by** auto

lemma true_cls_mset_add_mset[iff]: $I \models_m \text{add_mset } C \ CC \longleftrightarrow I \models C \wedge I \models_m CC$
unfolding true_cls_mset_def **by** auto

lemma true_cls_mset_image_mset[iff]: $I \models_m \text{image_mset } f \ A \longleftrightarrow (\forall x \in\# A. I \models f \ x)$
unfolding true_cls_mset_def **by** auto

lemma true_cls_mset_mono: $\text{set_mset } DD \subseteq \text{set_mset } CC \implies I \models_m CC \implies I \models_m DD$
unfolding true_cls_mset_def subset_iff **by** auto

lemma true_cls_set_mset[iff]: $I \models_s \text{set_mset } CC \longleftrightarrow I \models_m CC$
unfolding true_cls_def true_cls_mset_def **by** auto

lemma true_cls_mset_true_cls: $I \models_m CC \implies C \in\# CC \implies I \models C$
using true_cls_mset_def **by** auto

end

7 Abstract Substitutions

theory Abstract_Substitution
imports Clausal_Logic Map2
begin

Atoms and substitutions are abstracted away behind some locales, to avoid having a direct dependency on the IsaFoR library.

Conventions: 's substitutions, 'a atoms.

7.1 Library

lemma f_Suc_decr_eventually_const:
fixes f :: nat \Rightarrow nat
assumes leg: $\forall i. f \ (\text{Suc } i) \leq f \ i$
shows $\exists l. \forall l' \geq l. f \ l' = f \ (\text{Suc } l')$

proof (*rule ccontr*)
assume $a: \#l. \forall l' \geq l. f l' = f (Suc l')$
have $\forall i. \exists i'. i' > i \wedge f i' < f i$
proof
 fix i
 from a **have** $\exists l' \geq i. f l' \neq f (Suc l')$
 by *auto*
 then obtain l' **where**
 $l'_p: l' \geq i \wedge f l' \neq f (Suc l')$
 by *metis*
 then have $f l' > f (Suc l')$
 using *leq le_eq_less_or_eq* **by** *auto*
 moreover have $f i \geq f l'$
 using *leq l'_p* **by** (*induction l' arbitrary: i*) (*blast intro: lift_Suc_antimono_le*)
 ultimately show $\exists i' > i. f i' < f i$
 using l'_p *less_le_trans* **by** *blast*
qed
then obtain $g_sm :: nat \Rightarrow nat$ **where**
 $g_sm_p: \forall i. g_sm i > i \wedge f (g_sm i) < f i$
by *metis*

define $c :: nat \Rightarrow nat$ **where**
 $\bigwedge n. c n = (g_sm \hat{\ } n) 0$

have $f (c i) > f (c (Suc i))$ **for** i
by (*induction i*) (*auto simp: c_def g_sm_p*)
then have $\forall i. (f \circ c) i > (f \circ c) (Suc i)$
by *auto*
then have $\exists fc :: nat \Rightarrow nat. \forall i. fc i > fc (Suc i)$
by *metis*
then show *False*
using *wf_less_than* **by** (*simp add: wf_iff_no_infinite_down_chain*)
qed

7.2 Substitution Operators

locale *substitution_ops* =
 fixes
 $subst_atm :: 'a \Rightarrow 's \Rightarrow 'a$ **and**
 $id_subst :: 's$ **and**
 $comp_subst :: 's \Rightarrow 's \Rightarrow 's$
begin

abbreviation $subst_atm_abbrev :: 'a \Rightarrow 's \Rightarrow 'a$ (*infixl* $\cdot a$ 67) **where**
 $subst_atm_abbrev \equiv subst_atm$

abbreviation $comp_subst_abbrev :: 's \Rightarrow 's \Rightarrow 's$ (*infixl* \odot 67) **where**
 $comp_subst_abbrev \equiv comp_subst$

definition $comp_substs :: 's\ list \Rightarrow 's\ list \Rightarrow 's\ list$ (*infixl* $\odot s$ 67) **where**
 $\sigma s \odot s \tau s = map2\ comp_subst\ \sigma s\ \tau s$

definition $subst_atms :: 'a\ set \Rightarrow 's \Rightarrow 'a\ set$ (*infixl* $\cdot as$ 67) **where**
 $AA \cdot as\ \sigma = (\lambda A. A \cdot a\ \sigma) \text{ ` } AA$

definition $subst_atmss :: 'a\ set\ set \Rightarrow 's \Rightarrow 'a\ set\ set$ (*infixl* $\cdot ass$ 67) **where**
 $AAA \cdot ass\ \sigma = (\lambda AAA. AA \cdot as\ \sigma) \text{ ` } AAA$

definition $subst_atm_list :: 'a\ list \Rightarrow 's \Rightarrow 'a\ list$ (*infixl* $\cdot al$ 67) **where**
 $As \cdot al\ \sigma = map\ (\lambda A. A \cdot a\ \sigma)\ As$

definition $subst_atm_mset :: 'a\ multiset \Rightarrow 's \Rightarrow 'a\ multiset$ (*infixl* $\cdot am$ 67) **where**
 $AA \cdot am\ \sigma = image_mset\ (\lambda A. A \cdot a\ \sigma)\ AA$

definition

$subst_atm_mset_list :: 'a\ multiset\ list \Rightarrow 's \Rightarrow 'a\ multiset\ list$ (**infixl** $\cdot aml$ 67)

where

$AAA \cdot aml\ \sigma = map\ (\lambda AA. AA \cdot am\ \sigma)\ AAA$

definition

$subst_atm_mset_lists :: 'a\ multiset\ list \Rightarrow 's\ list \Rightarrow 'a\ multiset\ list$ (**infixl** $\cdot\cdot aml$ 67)

where

$AAs \cdot\cdot aml\ \sigma s = map2\ (\cdot am)\ AAs\ \sigma s$

definition $subst_lit :: 'a\ literal \Rightarrow 's \Rightarrow 'a\ literal$ (**infixl** $\cdot l$ 67) **where**

$L \cdot l\ \sigma = map_literal\ (\lambda A. A \cdot a\ \sigma)\ L$

lemma $atm_of_subst_lit[simp]$: $atm_of\ (L \cdot l\ \sigma) = atm_of\ L \cdot a\ \sigma$

unfolding $subst_lit_def$ **by** $(cases\ L)\ simp+$

definition $subst_cls :: 'a\ clause \Rightarrow 's \Rightarrow 'a\ clause$ (**infixl** \cdot 67) **where**

$AA \cdot \sigma = image_mset\ (\lambda A. A \cdot l\ \sigma)\ AA$

definition $subst_clss :: 'a\ clause\ set \Rightarrow 's \Rightarrow 'a\ clause\ set$ (**infixl** $\cdot cs$ 67) **where**

$AA \cdot cs\ \sigma = (\lambda A. A \cdot \sigma)\ ' AA$

definition $subst_cls_list :: 'a\ clause\ list \Rightarrow 's \Rightarrow 'a\ clause\ list$ (**infixl** $\cdot cl$ 67) **where**

$Cs \cdot cl\ \sigma = map\ (\lambda A. A \cdot \sigma)\ Cs$

definition $subst_cls_lists :: 'a\ clause\ list \Rightarrow 's\ list \Rightarrow 'a\ clause\ list$ (**infixl** $\cdot\cdot cl$ 67) **where**

$Cs \cdot\cdot cl\ \sigma s = map2\ (\cdot)\ Cs\ \sigma s$

definition $subst_cls_mset :: 'a\ clause\ multiset \Rightarrow 's \Rightarrow 'a\ clause\ multiset$ (**infixl** $\cdot cm$ 67) **where**

$CC \cdot cm\ \sigma = image_mset\ (\lambda A. A \cdot \sigma)\ CC$

lemma $subst_cls_add_mset[simp]$: $add_mset\ L\ C \cdot \sigma = add_mset\ (L \cdot l\ \sigma)\ (C \cdot \sigma)$

unfolding $subst_cls_def$ **by** $simp$

lemma $subst_cls_mset_add_mset[simp]$: $add_mset\ C\ CC \cdot cm\ \sigma = add_mset\ (C \cdot \sigma)\ (CC \cdot cm\ \sigma)$

unfolding $subst_cls_mset_def$ **by** $simp$

definition $generalizes_atm :: 'a \Rightarrow 'a \Rightarrow bool$ **where**

$generalizes_atm\ A\ B \longleftrightarrow (\exists \sigma. A \cdot a\ \sigma = B)$

definition $strictly_generalizes_atm :: 'a \Rightarrow 'a \Rightarrow bool$ **where**

$strictly_generalizes_atm\ A\ B \longleftrightarrow generalizes_atm\ A\ B \wedge \neg generalizes_atm\ B\ A$

definition $generalizes_lit :: 'a\ literal \Rightarrow 'a\ literal \Rightarrow bool$ **where**

$generalizes_lit\ L\ M \longleftrightarrow (\exists \sigma. L \cdot l\ \sigma = M)$

definition $strictly_generalizes_lit :: 'a\ literal \Rightarrow 'a\ literal \Rightarrow bool$ **where**

$strictly_generalizes_lit\ L\ M \longleftrightarrow generalizes_lit\ L\ M \wedge \neg generalizes_lit\ M\ L$

definition $generalizes_cls :: 'a\ clause \Rightarrow 'a\ clause \Rightarrow bool$ **where**

$generalizes_cls\ C\ D \longleftrightarrow (\exists \sigma. C \cdot \sigma = D)$

definition $strictly_generalizes_cls :: 'a\ clause \Rightarrow 'a\ clause \Rightarrow bool$ **where**

$strictly_generalizes_cls\ C\ D \longleftrightarrow generalizes_cls\ C\ D \wedge \neg generalizes_cls\ D\ C$

definition $subsumes :: 'a\ clause \Rightarrow 'a\ clause \Rightarrow bool$ **where**

$subsumes\ C\ D \longleftrightarrow (\exists \sigma. C \cdot \sigma \subseteq\# D)$

definition $strictly_subsumes :: 'a\ clause \Rightarrow 'a\ clause \Rightarrow bool$ **where**

$strictly_subsumes\ C\ D \longleftrightarrow subsumes\ C\ D \wedge \neg subsumes\ D\ C$

definition $variants :: 'a\ clause \Rightarrow 'a\ clause \Rightarrow bool$ **where**

$variants\ C\ D \longleftrightarrow generalizes_cls\ C\ D \wedge generalizes_cls\ D\ C$

definition $is_renaming :: 's \Rightarrow bool$ **where**
 $is_renaming\ \sigma \longleftrightarrow (\exists \tau. \sigma \odot \tau = id_subst)$

definition $is_renaming_list :: 's\ list \Rightarrow bool$ **where**
 $is_renaming_list\ \sigma s \longleftrightarrow (\forall \sigma \in set\ \sigma s. is_renaming\ \sigma)$

definition $inv_renaming :: 's \Rightarrow 's$ **where**
 $inv_renaming\ \sigma = (SOME\ \tau. \sigma \odot \tau = id_subst)$

definition $is_ground_atm :: 'a \Rightarrow bool$ **where**
 $is_ground_atm\ A \longleftrightarrow (\forall \sigma. A = A \cdot a\ \sigma)$

definition $is_ground_atms :: 'a\ set \Rightarrow bool$ **where**
 $is_ground_atms\ AA = (\forall A \in AA. is_ground_atm\ A)$

definition $is_ground_atm_list :: 'a\ list \Rightarrow bool$ **where**
 $is_ground_atm_list\ As \longleftrightarrow (\forall A \in set\ As. is_ground_atm\ A)$

definition $is_ground_atm_mset :: 'a\ multiset \Rightarrow bool$ **where**
 $is_ground_atm_mset\ AA \longleftrightarrow (\forall A. A \in\# AA \longrightarrow is_ground_atm\ A)$

definition $is_ground_lit :: 'a\ literal \Rightarrow bool$ **where**
 $is_ground_lit\ L \longleftrightarrow is_ground_atm\ (atm_of\ L)$

definition $is_ground_cls :: 'a\ clause \Rightarrow bool$ **where**
 $is_ground_cls\ C \longleftrightarrow (\forall L. L \in\# C \longrightarrow is_ground_lit\ L)$

definition $is_ground_clss :: 'a\ clause\ set \Rightarrow bool$ **where**
 $is_ground_clss\ CC \longleftrightarrow (\forall C \in CC. is_ground_cls\ C)$

definition $is_ground_cls_list :: 'a\ clause\ list \Rightarrow bool$ **where**
 $is_ground_cls_list\ CC \longleftrightarrow (\forall C \in set\ CC. is_ground_cls\ C)$

definition $is_ground_subst :: 's \Rightarrow bool$ **where**
 $is_ground_subst\ \sigma \longleftrightarrow (\forall A. is_ground_atm\ (A \cdot a\ \sigma))$

definition $is_ground_subst_list :: 's\ list \Rightarrow bool$ **where**
 $is_ground_subst_list\ \sigma s \longleftrightarrow (\forall \sigma \in set\ \sigma s. is_ground_subst\ \sigma)$

definition $grounding_of_cls :: 'a\ clause \Rightarrow 'a\ clause\ set$ **where**
 $grounding_of_cls\ C = \{C \cdot \sigma \mid \sigma. is_ground_subst\ \sigma\}$

definition $grounding_of_clss :: 'a\ clause\ set \Rightarrow 'a\ clause\ set$ **where**
 $grounding_of_clss\ CC = (\bigcup C \in CC. grounding_of_cls\ C)$

definition $is_unifier :: 's \Rightarrow 'a\ set \Rightarrow bool$ **where**
 $is_unifier\ \sigma\ AA \longleftrightarrow card\ (AA \cdot as\ \sigma) \leq 1$

definition $is_unifiers :: 's \Rightarrow 'a\ set\ set \Rightarrow bool$ **where**
 $is_unifiers\ \sigma\ AAA \longleftrightarrow (\forall AA \in AAA. is_unifier\ \sigma\ AA)$

definition $is_mgu :: 's \Rightarrow 'a\ set\ set \Rightarrow bool$ **where**
 $is_mgu\ \sigma\ AAA \longleftrightarrow is_unifiers\ \sigma\ AAA \wedge (\forall \tau. is_unifiers\ \tau\ AAA \longrightarrow (\exists \gamma. \tau = \sigma \odot \gamma))$

definition $var_disjoint :: 'a\ clause\ list \Rightarrow bool$ **where**
 $var_disjoint\ Cs \longleftrightarrow$
 $(\forall \sigma s. length\ \sigma s = length\ Cs \longrightarrow (\exists \tau. \forall i < length\ Cs. \forall S. S \subseteq\# Cs\ !\ i \longrightarrow S \cdot \sigma s\ !\ i = S \cdot \tau))$

end

7.3 Substitution Lemmas

locale *substitution* = *substitution_ops subst_atm id_subst comp_subst*
for
subst_atm :: 'a ⇒ 's ⇒ 'a **and**
id_subst :: 's **and**
comp_subst :: 's ⇒ 's ⇒ 's +
fixes
renamings_apart :: 'a clause list ⇒ 's list **and**
atm_of_atms :: 'a list ⇒ 'a
assumes
subst_atm_id_subst[simp]: $A \cdot a \text{ id_subst} = A$ **and**
subst_atm_comp_subst[simp]: $A \cdot a (\sigma \odot \tau) = (A \cdot a \sigma) \cdot a \tau$ **and**
subst_ext: $(\bigwedge A. A \cdot a \sigma = A \cdot a \tau) \implies \sigma = \tau$ **and**
make_ground_subst: $\text{is_ground_cls } (C \cdot \sigma) \implies \exists \tau. \text{is_ground_subst } \tau \wedge C \cdot \tau = C \cdot \sigma$ **and**
wf_strictly_generalizes_atm: *wfP strictly_generalizes_atm* **and**
renamings_apart_length: $\text{length } (\text{renamings_apart } Cs) = \text{length } Cs$ **and**
renamings_apart_renaming: $\varrho \in \text{set } (\text{renamings_apart } Cs) \implies \text{is_renaming } \varrho$ **and**
renamings_apart_var_disjoint: $\text{var_disjoint } (Cs \cdot\!\cdot\! cl (\text{renamings_apart } Cs))$ **and**
atm_of_atms_subst:
 $\bigwedge As Bs. \text{atm_of_atms } As \cdot a \sigma = \text{atm_of_atms } Bs \iff \text{map } (\lambda A. A \cdot a \sigma) As = Bs$
begin

lemma *subst_ext_iff*: $\sigma = \tau \iff (\forall A. A \cdot a \sigma = A \cdot a \tau)$
by (*blast intro: subst_ext*)

7.3.1 Identity Substitution

lemma *id_subst_comp_subst[simp]*: $\text{id_subst} \odot \sigma = \sigma$
by (*rule subst_ext simp*)

lemma *comp_subst_id_subst[simp]*: $\sigma \odot \text{id_subst} = \sigma$
by (*rule subst_ext simp*)

lemma *id_subst_comp_substs[simp]*: $\text{replicate } (\text{length } \sigma s) \text{id_subst} \odot s \sigma s = \sigma s$
using *comp_substs_def* **by** (*induction* σs) *auto*

lemma *comp_substs_id_subst[simp]*: $\sigma s \odot s \text{replicate } (\text{length } \sigma s) \text{id_subst} = \sigma s$
using *comp_substs_def* **by** (*induction* σs) *auto*

lemma *subst_atms_id_subst[simp]*: $AA \cdot as \text{id_subst} = AA$
unfolding *subst_atms_def* **by** *simp*

lemma *subst_atmss_id_subst[simp]*: $AAA \cdot ass \text{id_subst} = AAA$
unfolding *subst_atmss_def* **by** *simp*

lemma *subst_atm_list_id_subst[simp]*: $As \cdot al \text{id_subst} = As$
unfolding *subst_atm_list_def* **by** *auto*

lemma *subst_atm_mset_id_subst[simp]*: $AA \cdot am \text{id_subst} = AA$
unfolding *subst_atm_mset_def* **by** *simp*

lemma *subst_atm_mset_list_id_subst[simp]*: $AAs \cdot aml \text{id_subst} = AAs$
unfolding *subst_atm_mset_list_def* **by** *simp*

lemma *subst_atm_mset_lists_id_subst[simp]*: $AAs \cdot\!\cdot\! aml \text{replicate } (\text{length } AAs) \text{id_subst} = AAs$
unfolding *subst_atm_mset_lists_def* **by** (*induct* AAs) *auto*

lemma *subst_lit_id_subst[simp]*: $L \cdot l \text{id_subst} = L$
unfolding *subst_lit_def* **by** (*simp add: literal.map_ident*)

lemma *subst_cls_id_subst[simp]*: $C \cdot \text{id_subst} = C$
unfolding *subst_cls_def* **by** *simp*

lemma *subst_cls_id_subst[simp]*: $CC \cdot cs \text{ id_subst} = CC$
unfolding *subst_cls_def* **by** *simp*

lemma *subst_cls_list_id_subst[simp]*: $Cs \cdot cl \text{ id_subst} = Cs$
unfolding *subst_cls_list_def* **by** *simp*

lemma *subst_cls_lists_id_subst[simp]*: $Cs \cdot cl \text{ replicate } (\text{length } Cs) \text{ id_subst} = Cs$
unfolding *subst_cls_lists_def* **by** (*induct* Cs) *auto*

lemma *subst_cls_mset_id_subst[simp]*: $CC \cdot cm \text{ id_subst} = CC$
unfolding *subst_cls_mset_def* **by** *simp*

7.3.2 Associativity of Composition

lemma *comp_subst_assoc[simp]*: $\sigma \odot (\tau \odot \gamma) = \sigma \odot \tau \odot \gamma$
by (*rule* *subst_ext*) *simp*

7.3.3 Compatibility of Substitution and Composition

lemma *subst_atms_comp_subst[simp]*: $AA \cdot as (\tau \odot \sigma) = AA \cdot as \tau \cdot as \sigma$
unfolding *subst_atms_def* **by** *auto*

lemma *subst_atmss_comp_subst[simp]*: $AAA \cdot ass (\tau \odot \sigma) = AAA \cdot ass \tau \cdot ass \sigma$
unfolding *subst_atmss_def* **by** *auto*

lemma *subst_atm_list_comp_subst[simp]*: $As \cdot al (\tau \odot \sigma) = As \cdot al \tau \cdot al \sigma$
unfolding *subst_atm_list_def* **by** *auto*

lemma *subst_atm_mset_comp_subst[simp]*: $AA \cdot am (\tau \odot \sigma) = AA \cdot am \tau \cdot am \sigma$
unfolding *subst_atm_mset_def* **by** *auto*

lemma *subst_atm_mset_list_comp_subst[simp]*: $AAs \cdot aml (\tau \odot \sigma) = (AAs \cdot aml \tau) \cdot aml \sigma$
unfolding *subst_atm_mset_list_def* **by** *auto*

lemma *subst_atm_mset_lists_comp_substs[simp]*: $AAs \cdot aml (\tau s \odot s \sigma s) = AAs \cdot aml \tau s \cdot aml \sigma s$
unfolding *subst_atm_mset_lists_def* *comp_substs_def* *map_zip_map* *map_zip_map2* *map_zip_assoc*
by (*simp* *add*: *split_def*)

lemma *subst_lit_comp_subst[simp]*: $L \cdot l (\tau \odot \sigma) = L \cdot l \tau \cdot l \sigma$
unfolding *subst_lit_def* **by** (*auto* *simp*: *literal.map_comp* *o_def*)

lemma *subst_cls_comp_subst[simp]*: $C \cdot (\tau \odot \sigma) = C \cdot \tau \cdot \sigma$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_clscomp_subst[simp]*: $CC \cdot cs (\tau \odot \sigma) = CC \cdot cs \tau \cdot cs \sigma$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_cls_list_comp_subst[simp]*: $Cs \cdot cl (\tau \odot \sigma) = Cs \cdot cl \tau \cdot cl \sigma$
unfolding *subst_cls_list_def* **by** *auto*

lemma *subst_cls_lists_comp_substs[simp]*: $Cs \cdot cl (\tau s \odot s \sigma s) = Cs \cdot cl \tau s \cdot cl \sigma s$
unfolding *subst_cls_lists_def* *comp_substs_def* *map_zip_map* *map_zip_map2* *map_zip_assoc*
by (*simp* *add*: *split_def*)

lemma *subst_cls_mset_comp_subst[simp]*: $CC \cdot cm (\tau \odot \sigma) = CC \cdot cm \tau \cdot cm \sigma$
unfolding *subst_cls_mset_def* **by** *auto*

7.3.4 “Commutativity” of Membership and Substitution

lemma *Melem_subst_atm_mset[simp]*: $A \in\# AA \cdot am \sigma \longleftrightarrow (\exists B. B \in\# AA \wedge A = B \cdot a \sigma)$
unfolding *subst_atm_mset_def* **by** *auto*

lemma *Melem_subst_cls[simp]*: $L \in\# C \cdot \sigma \longleftrightarrow (\exists M. M \in\# C \wedge L = M \cdot l \sigma)$
unfolding *subst_cls_def* **by** *auto*

lemma *Melem_subst_cls_mset*[simp]: $AA \in\# CC \cdot cm \sigma \longleftrightarrow (\exists BB. BB \in\# CC \wedge AA = BB \cdot \sigma)$
unfolding *subst_cls_mset_def* **by** *auto*

7.3.5 Signs and Substitutions

lemma *subst_lit_is_neg*[simp]: $is_neg (L \cdot l \sigma) = is_neg L$
unfolding *subst_lit_def* **by** *auto*

lemma *subst_lit_is_pos*[simp]: $is_pos (L \cdot l \sigma) = is_pos L$
unfolding *subst_lit_def* **by** *auto*

lemma *subst_minus*[simp]: $(- L) \cdot l \mu = - (L \cdot l \mu)$
by (*simp add: literal.map_sel subst_lit_def uminus_literal_def*)

7.3.6 Substitution on Literal(s)

lemma *eql_neg_lit_eql_atm*[simp]: $(Neg A' \cdot l \eta) = Neg A \longleftrightarrow A' \cdot a \eta = A$
by (*simp add: subst_lit_def*)

lemma *eql_pos_lit_eql_atm*[simp]: $(Pos A' \cdot l \eta) = Pos A \longleftrightarrow A' \cdot a \eta = A$
by (*simp add: subst_lit_def*)

lemma *subst_cls_negs*[simp]: $(negs AA) \cdot \sigma = negs (AA \cdot am \sigma)$
unfolding *subst_cls_def subst_lit_def subst_atm_mset_def* **by** *auto*

lemma *subst_cls_poss*[simp]: $(poss AA) \cdot \sigma = poss (AA \cdot am \sigma)$
unfolding *subst_cls_def subst_lit_def subst_atm_mset_def* **by** *auto*

lemma *atms_of_subst_atms*: $atms_of C \cdot as \sigma = atms_of (C \cdot \sigma)$

proof –

have $atms_of (C \cdot \sigma) = set_mset (image_mset atm_of (image_mset (map_literal (\lambda A. A \cdot a \sigma)) C))$
unfolding *subst_cls_def subst_atms_def subst_lit_def atm_of_def* **by** *auto*
also have $\dots = set_mset (image_mset (\lambda A. A \cdot a \sigma) (image_mset atm_of C))$
by *simp (meson literal.map_sel)*
finally show $atms_of C \cdot as \sigma = atms_of (C \cdot \sigma)$
unfolding *subst_atms_def atm_of_def* **by** *auto*

qed

lemma *in_image_Neg_is_neg*[simp]: $L \cdot l \sigma \in Neg \text{ ' } AA \implies is_neg L$
by (*metis be_x_imageD literal.disc(2) literal.map_disc_iff subst_lit_def*)

lemma *subst_lit_in_negs_subst_is_neg*: $L \cdot l \sigma \in\# (negs AA) \cdot \tau \implies is_neg L$
by *simp*

lemma *subst_lit_in_negs_is_neg*: $L \cdot l \sigma \in\# negs AA \implies is_neg L$
by *simp*

7.3.7 Substitution on Empty

lemma *subst_atms_empty*[simp]: $\{\} \cdot as \sigma = \{\}$
unfolding *subst_atms_def* **by** *auto*

lemma *subst_atmss_empty*[simp]: $\{\} \cdot ass \sigma = \{\}$
unfolding *subst_atmss_def* **by** *auto*

lemma *comp_substs_empty_iff*[simp]: $\sigma s \odot s \eta s = [] \longleftrightarrow \sigma s = [] \vee \eta s = []$
using *comp_substs_def map2_empty_iff* **by** *auto*

lemma *subst_atm_list_empty*[simp]: $[] \cdot al \sigma = []$
unfolding *subst_atm_list_def* **by** *auto*

lemma *subst_atm_mset_empty*[simp]: $\{\#\} \cdot am \sigma = \{\#\}$
unfolding *subst_atm_mset_def* **by** *auto*

lemma *subst_atm_mset_list_empty[simp]*: $\square \cdot aml \sigma = \square$
unfolding *subst_atm_mset_list_def* **by** *auto*

lemma *subst_atm_mset_lists_empty[simp]*: $\square \cdot aml \sigma s = \square$
unfolding *subst_atm_mset_lists_def* **by** *auto*

lemma *subst_cls_empty[simp]*: $\{\#\} \cdot \sigma = \{\#\}$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_cls_empty[simp]*: $\{\} \cdot cs \sigma = \{\}$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_cls_list_empty[simp]*: $\square \cdot cl \sigma = \square$
unfolding *subst_cls_list_def* **by** *auto*

lemma *subst_cls_lists_empty[simp]*: $\square \cdot cl \sigma s = \square$
unfolding *subst_cls_lists_def* **by** *auto*

lemma *subst_scls_mset_empty[simp]*: $\{\#\} \cdot cm \sigma = \{\#\}$
unfolding *subst_cls_mset_def* **by** *auto*

lemma *subst_atms_empty_iff[simp]*: $AA \cdot as \eta = \{\} \longleftrightarrow AA = \{\}$
unfolding *subst_atms_def* **by** *auto*

lemma *subst_atmss_empty_iff[simp]*: $AAA \cdot ass \eta = \{\} \longleftrightarrow AAA = \{\}$
unfolding *subst_atmss_def* **by** *auto*

lemma *subst_atm_list_empty_iff[simp]*: $As \cdot al \eta = \square \longleftrightarrow As = \square$
unfolding *subst_atm_list_def* **by** *auto*

lemma *subst_atm_mset_empty_iff[simp]*: $AA \cdot am \eta = \{\#\} \longleftrightarrow AA = \{\#\}$
unfolding *subst_atm_mset_def* **by** *auto*

lemma *subst_atm_mset_list_empty_iff[simp]*: $AAs \cdot aml \eta = \square \longleftrightarrow AAs = \square$
unfolding *subst_atm_mset_list_def* **by** *auto*

lemma *subst_atm_mset_lists_empty_iff[simp]*: $AAs \cdot aml \eta s = \square \longleftrightarrow (AAs = \square \vee \eta s = \square)$
using *map2_empty_iff* *subst_atm_mset_lists_def* **by** *auto*

lemma *subst_cls_empty_iff[simp]*: $C \cdot \eta = \{\#\} \longleftrightarrow C = \{\#\}$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_cls_empty_iff[simp]*: $CC \cdot cs \eta = \{\} \longleftrightarrow CC = \{\}$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_cls_list_empty_iff[simp]*: $Cs \cdot cl \eta = \square \longleftrightarrow Cs = \square$
unfolding *subst_cls_list_def* **by** *auto*

lemma *subst_cls_lists_empty_iff[simp]*: $Cs \cdot cl \eta s = \square \longleftrightarrow (Cs = \square \vee \eta s = \square)$
using *map2_empty_iff* *subst_cls_lists_def* **by** *auto*

lemma *subst_cls_mset_empty_iff[simp]*: $CC \cdot cm \eta = \{\#\} \longleftrightarrow CC = \{\#\}$
unfolding *subst_cls_mset_def* **by** *auto*

7.3.8 Substitution on a Union

lemma *subst_atms_union[simp]*: $(AA \cup BB) \cdot as \sigma = AA \cdot as \sigma \cup BB \cdot as \sigma$
unfolding *subst_atms_def* **by** *auto*

lemma *subst_atmss_union[simp]*: $(AAA \cup BBB) \cdot ass \sigma = AAA \cdot ass \sigma \cup BBB \cdot ass \sigma$
unfolding *subst_atmss_def* **by** *auto*

lemma *subst_atm_list_append[simp]*: $(As @ Bs) \cdot al \sigma = As \cdot al \sigma @ Bs \cdot al \sigma$

unfolding *subst_atm_list_def* **by** *auto*

lemma *subst_atm_mset_union[simp]*: $(AA + BB) \cdot am \sigma = AA \cdot am \sigma + BB \cdot am \sigma$
unfolding *subst_atm_mset_def* **by** *auto*

lemma *subst_atm_mset_list_append[simp]*: $(AAs @ BBs) \cdot aml \sigma = AAs \cdot aml \sigma @ BBs \cdot aml \sigma$
unfolding *subst_atm_mset_list_def* **by** *auto*

lemma *subst_cls_union[simp]*: $(C + D) \cdot \sigma = C \cdot \sigma + D \cdot \sigma$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_cls_union[simp]*: $(CC \cup DD) \cdot cs \sigma = CC \cdot cs \sigma \cup DD \cdot cs \sigma$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_cls_list_append[simp]*: $(Cs @ Ds) \cdot cl \sigma = Cs \cdot cl \sigma @ Ds \cdot cl \sigma$
unfolding *subst_cls_list_def* **by** *auto*

lemma *subst_cls_mset_union[simp]*: $(CC + DD) \cdot cm \sigma = CC \cdot cm \sigma + DD \cdot cm \sigma$
unfolding *subst_cls_mset_def* **by** *auto*

7.3.9 Substitution on a Singleton

lemma *subst_atms_single[simp]*: $\{A\} \cdot as \sigma = \{A \cdot a \sigma\}$
unfolding *subst_atms_def* **by** *auto*

lemma *subst_atmss_single[simp]*: $\{AA\} \cdot ass \sigma = \{AA \cdot as \sigma\}$
unfolding *subst_atmss_def* **by** *auto*

lemma *subst_atm_list_single[simp]*: $[A] \cdot al \sigma = [A \cdot a \sigma]$
unfolding *subst_atm_list_def* **by** *auto*

lemma *subst_atm_mset_single[simp]*: $\{\#A\#\} \cdot am \sigma = \{\#A \cdot a \sigma\#\}$
unfolding *subst_atm_mset_def* **by** *auto*

lemma *subst_atm_mset_list[simp]*: $[AA] \cdot aml \sigma = [AA \cdot am \sigma]$
unfolding *subst_atm_mset_list_def* **by** *auto*

lemma *subst_cls_single[simp]*: $\{\#L\#\} \cdot \sigma = \{\#L \cdot l \sigma\#\}$
by *simp*

lemma *subst_cls_single[simp]*: $\{C\} \cdot cs \sigma = \{C \cdot \sigma\}$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_cls_list_single[simp]*: $[C] \cdot cl \sigma = [C \cdot \sigma]$
unfolding *subst_cls_list_def* **by** *auto*

lemma *subst_cls_mset_single[simp]*: $\{\#C\#\} \cdot cm \sigma = \{\#C \cdot \sigma\#\}$
by *simp*

7.3.10 Substitution on (#)

lemma *subst_atm_list_Cons[simp]*: $(A \# As) \cdot al \sigma = A \cdot a \sigma \# As \cdot al \sigma$
unfolding *subst_atm_list_def* **by** *auto*

lemma *subst_atm_mset_list_Cons[simp]*: $(A \# As) \cdot aml \sigma = A \cdot am \sigma \# As \cdot aml \sigma$
unfolding *subst_atm_mset_list_def* **by** *auto*

lemma *subst_atm_mset_lists_Cons[simp]*: $(C \# Cs) \cdot \cdot aml (\sigma \# \sigma s) = C \cdot am \sigma \# Cs \cdot \cdot aml \sigma s$
unfolding *subst_atm_mset_lists_def* **by** *auto*

lemma *subst_cls_list_Cons[simp]*: $(C \# Cs) \cdot cl \sigma = C \cdot \sigma \# Cs \cdot cl \sigma$
unfolding *subst_cls_list_def* **by** *auto*

lemma *subst_cls_lists_Cons[simp]*: $(C \# Cs) \cdot \cdot cl (\sigma \# \sigma s) = C \cdot \sigma \# Cs \cdot \cdot cl \sigma s$

unfolding *subst_cls_lists_def* by *auto*

7.3.11 Substitution on *tl*

lemma *subst_atm_list_tl[simp]*: $tl (As \cdot al \ \eta) = tl \ As \cdot al \ \eta$
by (*induction As*) *auto*

lemma *subst_atm_mset_list_tl[simp]*: $tl (AAs \cdot aml \ \eta) = tl \ AAs \cdot aml \ \eta$
by (*induction AAs*) *auto*

7.3.12 Substitution on (!)

lemma *comp_substs_nth[simp]*:
 $length \ \tau s = length \ \sigma s \implies i < length \ \tau s \implies (\tau s \odot s \ \sigma s) ! i = (\tau s ! i) \odot (\sigma s ! i)$
by (*simp add: comp_substs_def*)

lemma *subst_atm_list_nth[simp]*: $i < length \ As \implies (As \cdot al \ \tau) ! i = As ! i \cdot a \ \tau$
unfolding *subst_atm_list_def* using *less_Suc_eq_0_disj_nth_map* by *force*

lemma *subst_atm_mset_list_nth[simp]*: $i < length \ AAs \implies (AAs \cdot aml \ \eta) ! i = (AAs ! i) \cdot am \ \eta$
unfolding *subst_atm_mset_list_def* by *auto*

lemma *subst_atm_mset_lists_nth[simp]*:
 $length \ AAs = length \ \sigma s \implies i < length \ AAs \implies (AAs \cdot aml \ \sigma s) ! i = (AAs ! i) \cdot am \ (\sigma s ! i)$
unfolding *subst_atm_mset_lists_def* by *auto*

lemma *subst_cls_list_nth[simp]*: $i < length \ Cs \implies (Cs \cdot cl \ \tau) ! i = (Cs ! i) \cdot \tau$
unfolding *subst_cls_list_def* using *less_Suc_eq_0_disj_nth_map* by (*induction Cs*) *auto*

lemma *subst_cls_lists_nth[simp]*:
 $length \ Cs = length \ \sigma s \implies i < length \ Cs \implies (Cs \cdot cl \ \sigma s) ! i = (Cs ! i) \cdot (\sigma s ! i)$
unfolding *subst_cls_lists_def* by *auto*

7.3.13 Substitution on Various Other Functions

lemma *subst_cls_image[simp]*: $image \ f \ X \cdot cs \ \sigma = \{f \ x \cdot \sigma \mid x. x \in X\}$
unfolding *subst_cls_def* by *auto*

lemma *subst_cls_mset_image_mset[simp]*: $image_mset \ f \ X \cdot cm \ \sigma = \{\# f \ x \cdot \sigma. x \in \# X \ \#\}$
unfolding *subst_cls_mset_def* by *auto*

lemma *mset_subst_atm_list_subst_atm_mset[simp]*: $mset (As \cdot al \ \sigma) = mset (As) \cdot am \ \sigma$
unfolding *subst_atm_list_def* *subst_atm_mset_def* by *auto*

lemma *mset_subst_cls_list_subst_cls_mset*: $mset (Cs \cdot cl \ \sigma) = (mset \ Cs) \cdot cm \ \sigma$
unfolding *subst_cls_mset_def* *subst_cls_list_def* by *auto*

lemma *sum_list_subst_cls_list_subst_cls[simp]*: $sum_list (Cs \cdot cl \ \eta) = sum_list \ Cs \cdot \eta$
unfolding *subst_cls_list_def* by (*induction Cs*) *auto*

lemma *set_mset_subst_cls_mset_subst_cls*: $set_mset (CC \cdot cm \ \mu) = (set_mset \ CC) \cdot cs \ \mu$
by (*simp add: subst_cls_mset_def* *subst_cls_def*)

lemma *Neg_Melem_subst_atm_subst_cls[simp]*: $Neg \ A \in \# C \implies Neg (A \cdot a \ \sigma) \in \# C \cdot \sigma$
by (*metis Melem_subst_cls* *eql_neg_lit_eql_atm*)

lemma *Pos_Melem_subst_atm_subst_cls[simp]*: $Pos \ A \in \# C \implies Pos (A \cdot a \ \sigma) \in \# C \cdot \sigma$
by (*metis Melem_subst_cls* *eql_pos_lit_eql_atm*)

lemma *in_atms_of_subst[simp]*: $B \in atms_of \ C \implies B \cdot a \ \sigma \in atms_of (C \cdot \sigma)$
by (*metis atms_of_subst_atms* *image_iff* *subst_atms_def*)

7.3.14 Renamings

lemma *is_renaming_id_subst[simp]*: *is_renaming_id_subst*

unfolding *is_renaming_def* **by** *simp*

lemma *is_renamingD*: $is_renaming\ \sigma \implies (\forall A1\ A2. A1 \cdot a\ \sigma = A2 \cdot a\ \sigma \iff A1 = A2)$
by (*metis is_renaming_def subst_atm_comp_subst subst_atm_id_subst*)

lemma *inv_renaming_cancel_r*[*simp*]: $is_renaming\ r \implies r \odot inv_renaming\ r = id_subst$
unfolding *inv_renaming_def is_renaming_def* **by** (*metis (mono_tags) someI_ex*)

lemma *inv_renaming_cancel_r_list*[*simp*]:
 $is_renaming_list\ rs \implies rs \odot s\ map\ inv_renaming\ rs = replicate\ (length\ rs)\ id_subst$
unfolding *is_renaming_list_def* **by** (*induction rs*) (*auto simp add: comp_substs_def*)

lemma *Nil_comp_substs*[*simp*]: $\ [] \odot s\ s = \ []$
unfolding *comp_substs_def* **by** *auto*

lemma *comp_substs_Nil*[*simp*]: $s \odot s\ \ [] = \ []$
unfolding *comp_substs_def* **by** *auto*

lemma *is_renaming_idempotent_id_subst*: $is_renaming\ r \implies r \odot r = r \implies r = id_subst$
by (*metis comp_subst_assoc comp_subst_id_subst inv_renaming_cancel_r*)

lemma *is_renaming_left_id_subst_right_id_subst*:
 $is_renaming\ r \implies s \odot r = id_subst \implies r \odot s = id_subst$
by (*metis comp_subst_assoc comp_subst_id_subst is_renaming_def*)

lemma *is_renaming_closure*: $is_renaming\ r1 \implies is_renaming\ r2 \implies is_renaming\ (r1 \odot r2)$
unfolding *is_renaming_def* **by** (*metis comp_subst_assoc comp_subst_id_subst*)

lemma *is_renaming_inv_renaming_cancel_atm*[*simp*]: $is_renaming\ \varrho \implies A \cdot a\ \varrho \cdot a\ inv_renaming\ \varrho = A$
by (*metis inv_renaming_cancel_r subst_atm_comp_subst subst_atm_id_subst*)

lemma *is_renaming_inv_renaming_cancel_atms*[*simp*]: $is_renaming\ \varrho \implies AA \cdot as\ \varrho \cdot as\ inv_renaming\ \varrho = AA$
by (*metis inv_renaming_cancel_r subst_atms_comp_subst subst_atms_id_subst*)

lemma *is_renaming_inv_renaming_cancel_atmss*[*simp*]: $is_renaming\ \varrho \implies AAA \cdot ass\ \varrho \cdot ass\ inv_renaming\ \varrho = AAA$
by (*metis inv_renaming_cancel_r subst_atmss_comp_subst subst_atmss_id_subst*)

lemma *is_renaming_inv_renaming_cancel_atm_list*[*simp*]: $is_renaming\ \varrho \implies As \cdot al\ \varrho \cdot al\ inv_renaming\ \varrho = As$
by (*metis inv_renaming_cancel_r subst_atm_list_comp_subst subst_atm_list_id_subst*)

lemma *is_renaming_inv_renaming_cancel_atm_mset*[*simp*]: $is_renaming\ \varrho \implies AA \cdot am\ \varrho \cdot am\ inv_renaming\ \varrho = AA$
by (*metis inv_renaming_cancel_r subst_atm_mset_comp_subst subst_atm_mset_id_subst*)

lemma *is_renaming_inv_renaming_cancel_atm_mset_list*[*simp*]: $is_renaming\ \varrho \implies (AAs \cdot aml\ \varrho) \cdot aml\ inv_renaming\ \varrho = AAs$
by (*metis inv_renaming_cancel_r subst_atm_mset_list_comp_subst subst_atm_mset_list_id_subst*)

lemma *is_renaming_list_inv_renaming_cancel_atm_mset_lists*[*simp*]:
 $length\ AAs = length\ \varrho s \implies is_renaming_list\ \varrho s \implies AAs \cdot aml\ \varrho s \cdot aml\ map\ inv_renaming\ \varrho s = AAs$
by (*metis inv_renaming_cancel_r_list subst_atm_mset_lists_comp_substs subst_atm_mset_lists_id_subst*)

lemma *is_renaming_inv_renaming_cancel_lit*[*simp*]: $is_renaming\ \varrho \implies (L \cdot l\ \varrho) \cdot l\ inv_renaming\ \varrho = L$
by (*metis inv_renaming_cancel_r subst_lit_comp_subst subst_lit_id_subst*)

lemma *is_renaming_inv_renaming_cancel_cls*[*simp*]: $is_renaming\ \varrho \implies C \cdot \varrho \cdot inv_renaming\ \varrho = C$
by (*metis inv_renaming_cancel_r subst_cls_comp_subst subst_cls_id_subst*)

lemma *is_renaming_inv_renaming_cancel_cls*[*simp*]: $is_renaming\ \varrho \implies CC \cdot cs\ \varrho \cdot cs\ inv_renaming\ \varrho = CC$
by (*metis inv_renaming_cancel_r subst_cls_id_subst subst_clscomp_subst*)

lemma *is_renaming_inv_renaming_cancel_cls_list*[*simp*]: $is_renaming\ \varrho \implies Cs \cdot cl\ \varrho \cdot cl\ inv_renaming\ \varrho = Cs$
by (*metis inv_renaming_cancel_r subst_cls_list_comp_subst subst_cls_list_id_subst*)

lemma *is_renaming_list_inv_renaming_cancel_cls_list[simp]*:
 $\text{length } Cs = \text{length } \varrho s \implies \text{is_renaming_list } \varrho s \implies Cs \cdot\!\cdot\! cl \varrho s \cdot\!\cdot\! cl \text{ map } \text{inv_renaming } \varrho s = Cs$
by (*metis inv_renaming_cancel_r_list subst_cls_lists_comp_substs subst_cls_lists_id_subst*)

lemma *is_renaming_inv_renaming_cancel_cls_mset[simp]*: $\text{is_renaming } \varrho \implies CC \cdot\!\cdot\! cm \varrho \cdot\!\cdot\! cm \text{ inv_renaming } \varrho = CC$
by (*metis inv_renaming_cancel_r subst_cls_mset_comp_subst subst_cls_mset_id_subst*)

7.3.15 Monotonicity

lemma *subst_cls_mono*: $\text{set_mset } C \subseteq \text{set_mset } D \implies \text{set_mset } (C \cdot \sigma) \subseteq \text{set_mset } (D \cdot \sigma)$
by *force*

lemma *subst_cls_mono_mset*: $C \subseteq\# D \implies C \cdot \sigma \subseteq\# D \cdot \sigma$
unfolding *subst_cls_def* **by** (*metis mset_subset_eq_exists_conv subst_cls_union*)

lemma *subst_subset_mono*: $D \subseteq\# C \implies D \cdot \sigma \subseteq\# C \cdot \sigma$
unfolding *subst_cls_def* **by** (*simp add: image_mset_subset_mono*)

7.3.16 Size after Substitution

lemma *size_subst[simp]*: $\text{size } (D \cdot \sigma) = \text{size } D$
unfolding *subst_cls_def* **by** *auto*

lemma *subst_atm_list_length[simp]*: $\text{length } (As \cdot\!\cdot\! al \sigma) = \text{length } As$
unfolding *subst_atm_list_def* **by** *auto*

lemma *length_subst_atm_mset_list[simp]*: $\text{length } (AAs \cdot\!\cdot\! aml \eta) = \text{length } AAs$
unfolding *subst_atm_mset_list_def* **by** *auto*

lemma *subst_atm_mset_lists_length[simp]*: $\text{length } (AAs \cdot\!\cdot\! aml \sigma s) = \min (\text{length } AAs) (\text{length } \sigma s)$
unfolding *subst_atm_mset_lists_def* **by** *auto*

lemma *subst_cls_list_length[simp]*: $\text{length } (Cs \cdot\!\cdot\! cl \sigma) = \text{length } Cs$
unfolding *subst_cls_list_def* **by** *auto*

lemma *comp_substs_length[simp]*: $\text{length } (\tau s \odot s \sigma s) = \min (\text{length } \tau s) (\text{length } \sigma s)$
unfolding *comp_substs_def* **by** *auto*

lemma *subst_cls_lists_length[simp]*: $\text{length } (Cs \cdot\!\cdot\! cl \sigma s) = \min (\text{length } Cs) (\text{length } \sigma s)$
unfolding *subst_cls_lists_def* **by** *auto*

7.3.17 Variable Disjointness

lemma *var_disjoint_clauses*:
assumes *var_disjoint Cs*
shows $\forall \sigma s. \text{length } \sigma s = \text{length } Cs \longrightarrow (\exists \tau. Cs \cdot\!\cdot\! cl \sigma s = Cs \cdot\!\cdot\! cl \tau)$
proof *clarify*
fix $\sigma s :: 's \text{ list}$
assume $a: \text{length } \sigma s = \text{length } Cs$
then obtain τ **where** $\forall i < \text{length } Cs. \forall S. S \subseteq\# Cs ! i \longrightarrow S \cdot \sigma s ! i = S \cdot \tau$
using *assms* **unfolding** *var_disjoint_def* **by** *blast*
then have $\forall i < \text{length } Cs. (Cs ! i) \cdot \sigma s ! i = (Cs ! i) \cdot \tau$
by *auto*
then have $Cs \cdot\!\cdot\! cl \sigma s = Cs \cdot\!\cdot\! cl \tau$
using a **by** (*auto intro: nth_equalityI*)
then show $\exists \tau. Cs \cdot\!\cdot\! cl \sigma s = Cs \cdot\!\cdot\! cl \tau$
by *auto*
qed

7.3.18 Ground Expressions and Substitutions

lemma *ex_ground_subst*: $\exists \sigma. \text{is_ground_subst } \sigma$
using *make_ground_subst[of \{\#\}*]
by (*simp add: is_ground_cls_def*)

lemma *is_ground_cls_list_Cons*[simp]:
 $is_ground_cls_list (C \# Cs) = (is_ground_cls C \wedge is_ground_cls_list Cs)$
unfolding *is_ground_cls_list_def* **by** *auto*

Ground union lemma *is_ground_atms_union*[simp]: $is_ground_atms (AA \cup BB) \longleftrightarrow is_ground_atms AA \wedge is_ground_atms BB$
unfolding *is_ground_atms_def* **by** *auto*

lemma *is_ground_atm_mset_union*[simp]:
 $is_ground_atm_mset (AA + BB) \longleftrightarrow is_ground_atm_mset AA \wedge is_ground_atm_mset BB$
unfolding *is_ground_atm_mset_def* **by** *auto*

lemma *is_ground_cls_union*[simp]: $is_ground_cls (C + D) \longleftrightarrow is_ground_cls C \wedge is_ground_cls D$
unfolding *is_ground_cls_def* **by** *auto*

lemma *is_ground_clss_union*[simp]:
 $is_ground_clss (CC \cup DD) \longleftrightarrow is_ground_clss CC \wedge is_ground_clss DD$
unfolding *is_ground_clss_def* **by** *auto*

lemma *is_ground_cls_list_is_ground_cls_sum_list*[simp]:
 $is_ground_cls_list Cs \implies is_ground_cls (sum_list Cs)$
by (*meson in_mset_sum_list2 is_ground_cls_def is_ground_cls_list_def*)

Ground mono lemma *is_ground_cls_mono*: $C \subseteq\# D \implies is_ground_cls D \implies is_ground_cls C$
unfolding *is_ground_cls_def* **by** (*metis set_mset_mono subsetD*)

lemma *is_ground_clss_mono*: $CC \subseteq DD \implies is_ground_clss DD \implies is_ground_clss CC$
unfolding *is_ground_clss_def* **by** *blast*

lemma *grounding_of_clss_mono*: $CC \subseteq DD \implies grounding_of_clss CC \subseteq grounding_of_clss DD$
using *grounding_of_clss_def* **by** *auto*

lemma *sum_list_subseteq_mset_is_ground_cls_list*[simp]:
 $sum_list Cs \subseteq\# sum_list Ds \implies is_ground_cls_list Ds \implies is_ground_cls_list Cs$
by (*meson in_mset_sum_list is_ground_cls_def is_ground_cls_list_is_ground_cls_sum_list is_ground_cls_mono is_ground_cls_list_def*)

Substituting on ground expression preserves ground lemma *is_ground_comp_subst*[simp]: $is_ground_subst \sigma \implies is_ground_subst (\tau \odot \sigma)$
unfolding *is_ground_subst_def is_ground_atm_def* **by** *auto*

lemma *ground_subst_ground_atm*[simp]: $is_ground_subst \sigma \implies is_ground_atm (A \cdot a \sigma)$
by (*simp add: is_ground_subst_def*)

lemma *ground_subst_ground_lit*[simp]: $is_ground_subst \sigma \implies is_ground_lit (L \cdot l \sigma)$
unfolding *is_ground_lit_def subst_lit_def* **by** (*cases L*) *auto*

lemma *ground_subst_ground_cls*[simp]: $is_ground_subst \sigma \implies is_ground_cls (C \cdot \sigma)$
unfolding *is_ground_cls_def* **by** *auto*

lemma *ground_subst_ground_clss*[simp]: $is_ground_subst \sigma \implies is_ground_clss (CC \cdot cs \sigma)$
unfolding *is_ground_clss_def subst_clss_def* **by** *auto*

lemma *ground_subst_ground_cls_list*[simp]: $is_ground_subst \sigma \implies is_ground_cls_list (Cs \cdot cl \sigma)$
unfolding *is_ground_cls_list_def subst_cls_list_def* **by** *auto*

lemma *ground_subst_ground_cls_lists*[simp]:
 $\forall \sigma \in set \sigma s. is_ground_subst \sigma \implies is_ground_cls_list (Cs \cdot cl \sigma s)$
unfolding *is_ground_cls_list_def subst_cls_lists_def* **by** (*auto simp: set_zip*)

Substituting on ground expression has no effect lemma *is_ground_subst_atm*[simp]: $is_ground_atm A \implies A \cdot a \sigma = A$
unfolding *is_ground_atm_def* **by** *simp*

lemma *is_ground_subst_atms*[simp]: $is_ground_atms\ AA \implies AA \cdot as\ \sigma = AA$
unfolding *is_ground_atms_def subst_atms_def image_def* **by** *auto*

lemma *is_ground_subst_atm_mset*[simp]: $is_ground_atm_mset\ AA \implies AA \cdot am\ \sigma = AA$
unfolding *is_ground_atm_mset_def subst_atm_mset_def* **by** *auto*

lemma *is_ground_subst_atm_list*[simp]: $is_ground_atm_list\ As \implies As \cdot al\ \sigma = As$
unfolding *is_ground_atm_list_def subst_atm_list_def* **by** (*auto intro: nth_equalityI*)

lemma *is_ground_subst_atm_list_member*[simp]:
 $is_ground_atm_list\ As \implies i < length\ As \implies As\ !\ i \cdot a\ \sigma = As\ !\ i$
unfolding *is_ground_atm_list_def* **by** *auto*

lemma *is_ground_subst_lit*[simp]: $is_ground_lit\ L \implies L \cdot l\ \sigma = L$
unfolding *is_ground_lit_def subst_lit_def* **by** (*cases L*) *simp_all*

lemma *is_ground_subst_cls*[simp]: $is_ground_cls\ C \implies C \cdot \sigma = C$
unfolding *is_ground_cls_def subst_cls_def* **by** *simp*

lemma *is_ground_subst_cls*[simp]: $is_ground_clss\ CC \implies CC \cdot cs\ \sigma = CC$
unfolding *is_ground_clss_def subst_clss_def image_def* **by** *auto*

lemma *is_ground_subst_cls_lists*[simp]:
assumes $length\ P = length\ Cs$ **and** *is_ground_cls_list Cs*
shows $Cs \cdot cl\ P = Cs$
using *assms* **by** (*metis is_ground_cls_list_def is_ground_subst_cls min.idem nth_equalityI nth_mem*
subst_cls_lists_nth subst_cls_lists_length)

lemma *is_ground_subst_lit_iff*: $is_ground_lit\ L \longleftrightarrow (\forall \sigma. L = L \cdot l\ \sigma)$
using *is_ground_atm_def is_ground_lit_def subst_lit_def* **by** (*cases L*) *auto*

lemma *is_ground_subst_cls_iff*: $is_ground_cls\ C \longleftrightarrow (\forall \sigma. C = C \cdot \sigma)$
by (*metis ex_ground_subst ground_subst_ground_cls is_ground_subst_cls*)

Members of ground expressions are ground **lemma** *is_ground_cls_as_atms*: $is_ground_cls\ C \longleftrightarrow (\forall A \in$
 $atms_of\ C. is_ground_atm\ A)$
by (*auto simp: atms_of_def is_ground_cls_def is_ground_lit_def*)

lemma *is_ground_cls_imp_is_ground_lit*: $L \in \# C \implies is_ground_cls\ C \implies is_ground_lit\ L$
by (*simp add: is_ground_cls_def*)

lemma *is_ground_cls_imp_is_ground_atm*: $A \in atms_of\ C \implies is_ground_cls\ C \implies is_ground_atm\ A$
by (*simp add: is_ground_cls_as_atms*)

lemma *is_ground_cls_is_ground_atms_atms_of*[simp]: $is_ground_cls\ C \implies is_ground_atms\ (atms_of\ C)$
by (*simp add: is_ground_cls_imp_is_ground_atm is_ground_atms_def*)

lemma *grounding_ground*: $C \in grounding_of_clss\ M \implies is_ground_cls\ C$
unfolding *grounding_of_clss_def grounding_of_cls_def* **by** *auto*

lemma *in_subset_eq_grounding_of_clss_is_ground_cls*[simp]:
 $C \in CC \implies CC \subseteq grounding_of_clss\ DD \implies is_ground_cls\ C$
unfolding *grounding_of_clss_def grounding_of_cls_def* **by** *auto*

lemma *is_ground_cls_empty*[simp]: $is_ground_cls\ \{\#\}$
unfolding *is_ground_cls_def* **by** *simp*

lemma *grounding_of_cls_ground*: $is_ground_cls\ C \implies grounding_of_cls\ C = \{C\}$
unfolding *grounding_of_cls_def* **by** (*simp add: ex_ground_subst*)

lemma *grounding_of_cls_empty*[simp]: $grounding_of_cls\ \{\#\} = \{\{\#\}\}$
by (*simp add: grounding_of_cls_ground*)

7.3.19 Subsumption

lemma *subsumes_empty_left*[simp]: *subsumes* {#} *C*
unfolding *subsumes_def subst_cls_def* **by** *simp*

lemma *strictly_subsumes_empty_left*[simp]: *strictly_subsumes* {#} *C* \longleftrightarrow *C* \neq {#}
unfolding *strictly_subsumes_def subsumes_def subst_cls_def* **by** *simp*

7.3.20 Unifiers

lemma *card_le_one_alt*: *finite* *X* \implies *card* *X* \leq 1 \longleftrightarrow *X* = {} \vee ($\exists x. X = \{x\}$)
by (*induct* rule: *finite_induct*) *auto*

lemma *is_unifier_subst_atm_eqI*:
assumes *finite* *AA*
shows *is_unifier* σ *AA* \implies *A* \in *AA* \implies *B* \in *AA* \implies *A* \cdot *a* σ = *B* \cdot *a* σ
unfolding *is_unifier_def subst_atms_def card_le_one_alt*[*OF finite_imageI* [*OF assms*]]
by (*metis equals0D imageI insert_iff*)

lemma *is_unifier_alt*:
assumes *finite* *AA*
shows *is_unifier* σ *AA* \longleftrightarrow ($\forall A \in AA. \forall B \in AA. A \cdot a \sigma = B \cdot a \sigma$)
unfolding *is_unifier_def subst_atms_def card_le_one_alt*[*OF finite_imageI* [*OF assms*(1)]]
by (*rule iffI*, *metis empty_iff insert_iff insert_image*, *blast*)

lemma *is_unifiers_subst_atm_eqI*:
assumes *finite* *AA is_unifiers* σ *AAA* *AA* \in *AAA* *A* \in *AA* *B* \in *AA*
shows *A* \cdot *a* σ = *B* \cdot *a* σ
by (*metis assms is_unifiers_def is_unifier_subst_atm_eqI*)

theorem *is_unifiers_comp*:
is_unifiers σ (*set_mset* ' *set* (*map2* *add_mset* *As Bs*) \cdot *ass* η) \longleftrightarrow
is_unifiers ($\eta \odot \sigma$) (*set_mset* ' *set* (*map2* *add_mset* *As Bs*))
unfolding *is_unifiers_def is_unifier_def subst_atms_def* **by** *auto*

7.3.21 Most General Unifier

lemma *is_mgu_is_unifiers*: *is_mgu* σ *AAA* \implies *is_unifiers* σ *AAA*
using *is_mgu_def* **by** *blast*

lemma *is_mgu_is_most_general*: *is_mgu* σ *AAA* \implies *is_unifiers* τ *AAA* \implies $\exists \gamma. \tau = \sigma \odot \gamma$
using *is_mgu_def* **by** *blast*

lemma *is_unifiers_is_unifier*: *is_unifiers* σ *AAA* \implies *AA* \in *AAA* \implies *is_unifier* σ *AA*
using *is_unifiers_def* **by** *simp*

7.3.22 Generalization and Subsumption

lemma *variants_iff_subsumes*: *variants* *C D* \longleftrightarrow *subsumes* *C D* \wedge *subsumes* *D C*

proof

assume *variants* *C D*
then show *subsumes* *C D* \wedge *subsumes* *D C*
unfolding *variants_def generalizes_cls_def subsumes_def* **by** (*metis subset_mset.order.refl*)
next
assume *sub*: *subsumes* *C D* \wedge *subsumes* *D C*
then have *size* *C* = *size* *D*
unfolding *subsumes_def* **by** (*metis antisym size_mset_mono size_subst*)
then show *variants* *C D*
using *sub* **unfolding** *subsumes_def variants_def generalizes_cls_def*
by (*metis leD mset_subset_size size_mset_mono size_subst*
subset_mset.order.not_eq_order_implies_strict)

qed

lemma *wf_strictly_generalizes_cls*: *wfP* *strictly_generalizes_cls*

proof –

```

{
assume  $\exists C\_at. \forall i. \text{strictly\_generalizes\_cls } (C\_at (Suc\ i)) (C\_at\ i)$ 
then obtain  $C\_at :: nat \Rightarrow 'a \text{ clause}$  where
   $sg\_C: \bigwedge i. \text{strictly\_generalizes\_cls } (C\_at (Suc\ i)) (C\_at\ i)$ 
  by blast

define  $n :: nat$  where
   $n = \text{size } (C\_at\ 0)$ 

have  $sz\_C: \text{size } (C\_at\ i) = n$  for  $i$ 
proof (induct i)
  case (Suc i)
  then show ?case
    using  $sg\_C[of\ i]$  unfolding strictly\_generalizes\_cls\_def generalizes\_cls\_def subst\_cls\_def
    by (metis size\_image\_mset)
qed (simp add: n\_def)

obtain  $\sigma\_at :: nat \Rightarrow 's$  where
   $C\_sigma: \bigwedge i. \text{image\_mset } (\lambda L. L \cdot l\ \sigma\_at\ i) (C\_at (Suc\ i)) = C\_at\ i$ 
  using  $sg\_C[unfolding\ \text{strictly\_generalizes\_cls\_def generalizes\_cls\_def subst\_cls\_def}]$  by metis

define  $Ls\_at :: nat \Rightarrow 'a \text{ literal list}$  where
   $Ls\_at = \text{rec\_nat } (SOME\ Ls. \text{mset } Ls = C\_at\ 0)$ 
   $(\lambda i\ Lsi. SOME\ Ls. \text{mset } Ls = C\_at (Suc\ i) \wedge \text{map } (\lambda L. L \cdot l\ \sigma\_at\ i) Ls = Lsi)$ 

have
   $Ls\_at\_0: Ls\_at\ 0 = (SOME\ Ls. \text{mset } Ls = C\_at\ 0)$  and
   $Ls\_at\_Suc: \bigwedge i. Ls\_at (Suc\ i) =$ 
   $(SOME\ Ls. \text{mset } Ls = C\_at (Suc\ i) \wedge \text{map } (\lambda L. L \cdot l\ \sigma\_at\ i) Ls = Ls\_at\ i)$ 
  unfolding Ls\_at\_def by simp+

have  $\text{mset } Lt\_at\_0: \text{mset } (Ls\_at\ 0) = C\_at\ 0$ 
  unfolding Ls\_at\_0 by (rule someI_ex) (metis list\_of\_mset\_exi)

have  $\text{mset } (Ls\_at (Suc\ i)) = C\_at (Suc\ i) \wedge \text{map } (\lambda L. L \cdot l\ \sigma\_at\ i) (Ls\_at (Suc\ i)) = Ls\_at\ i$ 
  for  $i$ 
proof (induct i)
  case 0
  then show ?case
    by (simp add: Ls\_at\_Suc, rule someI_ex,
      metis C\_sigma image\_mset\_of\_subset\_list mset\_Lt\_at\_0)
  next
  case Suc
  then show ?case
    by (subst (1 2) Ls\_at\_Suc) (rule someI_ex, metis C\_sigma image\_mset\_of\_subset\_list)
qed
note  $\text{mset\_Ls} = \text{this}[THEN\ \text{conjunct1}]$  and  $Ls\_sigma = \text{this}[THEN\ \text{conjunct2}]$ 

have  $\text{len\_Ls}: \bigwedge i. \text{length } (Ls\_at\ i) = n$ 
  by (metis mset\_Ls mset\_Lt\_at\_0 not0\_implies\_Suc size\_mset sz\_C)

have  $\text{is\_pos\_Ls}: \bigwedge i\ j. j < n \implies \text{is\_pos } (Ls\_at (Suc\ i) ! j) \longleftrightarrow \text{is\_pos } (Ls\_at\ i ! j)$ 
  using  $Ls\_sigma\ \text{len\_Ls}$  by (metis literal.map\_disc\_iff nth\_map subst\_lit\_def)

have  $Ls\_tau\_strict\_lit: \bigwedge i\ \tau. \text{map } (\lambda L. L \cdot l\ \tau) (Ls\_at\ i) \neq Ls\_at (Suc\ i)$ 
  by (metis C\_sigma mset\_Ls Ls\_sigma mset\_map sg\_C generalizes\_cls\_def strictly\_generalizes\_cls\_def
    subst\_cls\_def)

have  $Ls\_tau\_strict\_tm:$ 
   $\text{map } ((\lambda t. t \cdot a\ \tau) \circ \text{atm\_of}) (Ls\_at\ i) \neq \text{map } \text{atm\_of} (Ls\_at (Suc\ i))$  for  $i\ \tau$ 
proof -
  obtain  $j :: nat$  where
     $j\_lt: j < n$  and

```

```

j_τ: Ls_at i ! j · l τ ≠ Ls_at (Suc i) ! j
using Ls_τ_strict_lit[of τ i] len_Ls
by (metis (no_types, lifting) length_map list_eq_iff_nth_eq nth_map)

have atm_of (Ls_at i ! j) · a τ ≠ atm_of (Ls_at (Suc i) ! j)
  using j_τ is_pos_Ls[OF j_lt]
  by (metis (mono_guards) literal.expand literal.map_disc_iff literal.map_sel subst_lit_def)
then show ?thesis
  using j_lt len_Ls by (metis nth_map o_apply)
qed

define tm_at :: nat ⇒ 'a where
  ∧i. tm_at i = atm_of_atms (map atm_of (Ls_at i))

have ∧i. generalizes_atm (tm_at (Suc i)) (tm_at i)
  unfolding tm_at_def generalizes_atm_def atm_of_atms_subst
  using Ls_σ[THEN arg_cong, of map atm_of] by (auto simp: comp_def)
moreover have ∧i. ¬ generalizes_atm (tm_at i) (tm_at (Suc i))
  unfolding tm_at_def generalizes_atm_def atm_of_atms_subst by (simp add: Ls_τ_strict_tm)
ultimately have ∧i. strictly_generalizes_atm (tm_at (Suc i)) (tm_at i)
  unfolding strictly_generalizes_atm_def by blast
then have False
  using wf_strictly_generalizes_atm[unfolded wfP_def wf_iff_no_infinite_down_chain] by blast
}
then show wfP (strictly_generalizes_cls :: 'a clause ⇒ _ ⇒ _)
  unfolding wfP_def by (blast intro: wf_iff_no_infinite_down_chain[THEN iffD2])
qed

lemma strict_subset_subst_strictly_subsumes:
  assumes cη_sub: C · η ⊂# D
  shows strictly_subsumes C D
  by (metis cη_sub leD mset_subset_size size_mset_mono size_subst strictly_subsumes_def
    subset_mset.dual_order.strict_implies_order substitution_ops.subsumes_def)

lemma subsumes_trans: subsumes C D ⇒ subsumes D E ⇒ subsumes C E
  unfolding subsumes_def
  by (metis (no_types) subset_mset.order.trans subst_cls_comp_subst subst_cls_mono_mset)

lemma subset_strictly_subsumes: C ⊂# D ⇒ strictly_subsumes C D
  using strict_subset_subst_strictly_subsumes[of C id_subst] by auto

lemma strictly_subsumes_neq: strictly_subsumes D' D ⇒ D' ≠ D · σ
  unfolding strictly_subsumes_def subsumes_def by blast

lemma strictly_subsumes_has_minimum:
  assumes CC ≠ {}
  shows ∃ C ∈ CC. ∀ D ∈ CC. ¬ strictly_subsumes D C
proof (rule ccontr)
  assume ¬ (∃ C ∈ CC. ∀ D ∈ CC. ¬ strictly_subsumes D C)
  then have ∀ C ∈ CC. ∃ D ∈ CC. strictly_subsumes D C
    by blast
  then obtain f where
    f_p: ∀ C ∈ CC. f C ∈ CC ∧ strictly_subsumes (f C) C
    by metis
  from assms obtain C where
    C_p: C ∈ CC
    by auto
  define c :: nat ⇒ 'a clause where
    ∧n. c n = (f ^^ n) C

  have incc: c i ∈ CC for i
    by (induction i) (auto simp: c_def f_p C_p)

```

```

have ps:  $\forall i. \text{strictly\_subsumes } (c \text{ (Suc } i)) \text{ (} c \text{ } i)$ 
  using incc f-p unfolding c.def by auto
have  $\forall i. \text{size } (c \text{ } i) \geq \text{size } (c \text{ (Suc } i))$ 
  using ps unfolding strictly_subsumes_def subsumes_def by (metis size_mset_mono size_subst)
then have lte:  $\forall i. (\text{size } \circ c) \text{ } i \geq (\text{size } \circ c) \text{ (Suc } i)$ 
  unfolding comp_def .
then have  $\exists l. \forall l' \geq l. \text{size } (c \text{ } l') = \text{size } (c \text{ (Suc } l'))$ 
  using f_Suc_decr_eventually_const comp_def by auto
then obtain l where
  l:  $\forall l' \geq l. \text{size } (c \text{ } l') = \text{size } (c \text{ (Suc } l'))$ 
  by metis
then have  $\forall l' \geq l. \text{strictly\_generalizes\_cls } (c \text{ (Suc } l')) \text{ (} c \text{ } l')$ 
  using ps unfolding strictly_generalizes_cls_def generalizes_cls_def
  by (metis size_subst less_irrefl strictly_subsumes_def mset_subset_size
    subset_mset_def subsumes_def strictly_subsumes_neg)
then have  $\forall i. \text{strictly\_generalizes\_cls } (c \text{ (Suc } i + l)) \text{ (} c \text{ (} i + l))$ 
  unfolding strictly_generalizes_cls_def generalizes_cls_def by auto
then have  $\exists f. \forall i. \text{strictly\_generalizes\_cls } (f \text{ (Suc } i)) \text{ (} f \text{ } i)$ 
  by (rule exI[of _  $\lambda x. c \text{ (} x + l)$ ])
then show False
  using wf_strictly_generalizes_cls
  wf_iff_no_infinite_down_chain[of {(x, y). strictly_generalizes_cls x y}]
  unfolding wfP_def by auto
qed

end

```

7.4 Most General Unifiers

```

locale mgu = substitution subst_atm id_subst comp_subst renamings_apart atm_of_atms
for
  subst_atm :: 'a  $\Rightarrow$  's  $\Rightarrow$  'a and
  id_subst :: 's and
  comp_subst :: 's  $\Rightarrow$  's  $\Rightarrow$  's and
  atm_of_atms :: 'a list  $\Rightarrow$  'a and
  renamings_apart :: 'a literal multiset list  $\Rightarrow$  's list +
fixes
  mgu :: 'a set set  $\Rightarrow$  's option
assumes
  mgu_sound: finite AAA  $\implies (\forall AA \in \text{AAA}. \text{finite } AA) \implies \text{mgu } \text{AAA} = \text{Some } \sigma \implies \text{is\_mgu } \sigma \text{ AAA}$  and
  mgu_complete:
    finite AAA  $\implies (\forall AA \in \text{AAA}. \text{finite } AA) \implies \text{is\_unifiers } \sigma \text{ AAA} \implies \exists \tau. \text{mgu } \text{AAA} = \text{Some } \tau$ 
begin

```

```

lemmas is_unifiers_mgu = mgu_sound[unfolded is_mgu_def, THEN conjunct1]
lemmas is_mgu_most_general = mgu_sound[unfolded is_mgu_def, THEN conjunct2]

```

lemma *mgu_unifier*:

```

assumes
  aslen: length As = n and
  aaslen: length AAs = n and
  mgu: Some  $\sigma = \text{mgu } (\text{set\_mset } ' \text{set } (\text{map2 } \text{add\_mset } \text{As } \text{AAs}))$  and
  i_lt: i < n and
  a_in: A  $\in \#$  AAs ! i
shows A  $\cdot a$   $\sigma = \text{As } ! i \cdot a$   $\sigma$ 
proof -
from mgu have is_mgu  $\sigma$  (set_mset ' (set (map2 add_mset As AAs)))
  using mgu_sound by auto
then have is_unifiers  $\sigma$  (set_mset ' (set (map2 add_mset As AAs)))
  using is_mgu_is_unifiers by auto
then have is_unifier  $\sigma$  (set_mset (add_mset (As ! i) (AAs ! i)))
  using i_lt aslen aaslen unfolding is_unifiers_def is_unifier_def
  by simp (metis length_zip min.idem nth_mem nth_zip prod.case set_mset_add_mset_insert)
then show ?thesis

```

```

    using aslen aaslen a_in is_unifier_subst_atm_eqf
    by (metis finite_set_mset insertCI set_mset_add_mset_insert)
qed

end

end

```

8 Refutational Inference Systems

```

theory Inference_System
  imports Herbrand_Interpretation
begin

```

This theory gathers results from Section 2.4 (“Refutational Theorem Proving”), 3 (“Standard Resolution”), and 4.2 (“Counterexample-Reducing Inference Systems”) of Bachmair and Ganzinger’s chapter.

8.1 Preliminaries

Inferences have one distinguished main premise, any number of side premises, and a conclusion.

```

datatype 'a inference =
  Infer (side_premis_of: 'a clause multiset) (main_prem_of: 'a clause) (concl_of: 'a clause)

```

```

abbreviation premis_of :: 'a inference  $\Rightarrow$  'a clause multiset where
  premis_of  $\gamma \equiv$  side_premis_of  $\gamma + \{\#$ main_prem_of  $\gamma\}$ 

```

```

abbreviation concls_of :: 'a inference set  $\Rightarrow$  'a clause set where
  concls_of  $\Gamma \equiv$  concl_of '  $\Gamma$ 

```

```

definition infer_from :: 'a clause set  $\Rightarrow$  'a inference  $\Rightarrow$  bool where
  infer_from  $CC \ \gamma \longleftrightarrow$  set_mset (premis_of  $\gamma$ )  $\subseteq$   $CC$ 

```

```

locale inference_system =
  fixes  $\Gamma ::$  'a inference set
begin

```

```

definition inferences_from :: 'a clause set  $\Rightarrow$  'a inference set where
  inferences_from  $CC = \{\gamma. \gamma \in \Gamma \wedge$  infer_from  $CC \ \gamma\}$ 

```

```

definition inferences_between :: 'a clause set  $\Rightarrow$  'a clause  $\Rightarrow$  'a inference set where
  inferences_between  $CC \ C = \{\gamma. \gamma \in \Gamma \wedge$  infer_from  $(CC \cup \{C\}) \ \gamma \wedge C \in \#$  premis_of  $\gamma\}$ 

```

```

lemma inferences_from_mono:  $CC \subseteq DD \implies$  inferences_from  $CC \subseteq$  inferences_from  $DD$ 
unfolding inferences_from_def infer_from_def by fast

```

```

definition saturated :: 'a clause set  $\Rightarrow$  bool where
  saturated  $N \longleftrightarrow$  concls_of (inferences_from  $N$ )  $\subseteq$   $N$ 

```

```

lemma saturatedD:

```

```

  assumes
    satur: saturated  $N$  and
    inf: Infer  $CC \ D \ E \in \Gamma$  and
    cc_subs_n: set_mset  $CC \subseteq N$  and
    d_in_n:  $D \in N$ 

```

```

  shows  $E \in N$ 

```

```

proof –

```

```

  have Infer  $CC \ D \ E \in$  inferences_from  $N$ 
    unfolding inferences_from_def infer_from_def using inf cc_subs_n d_in_n by simp
  then have  $E \in$  concls_of (inferences_from  $N$ )
    unfolding image_iff by (metis inference.sel(3))
  then show  $E \in N$ 

```



```

  using satur unfolding saturated_def by blast
qed

```

```

end

```

Satisfiability preservation is a weaker requirement than soundness.

```

locale sat_preserving_inference_system = inference_system +
  assumes  $\Gamma_{\text{sat\_preserving}}$ : satisfiable  $N \implies \text{satisfiable } (N \cup \text{concls\_of } (\text{inferences\_from } N))$ 

```

```

locale sound_inference_system = inference_system +
  assumes  $\Gamma_{\text{sound}}$ : Infer  $CC D E \in \Gamma \implies I \models_m CC \implies I \models D \implies I \models E$ 
begin

```

```

lemma  $\Gamma_{\text{sat\_preserving}}$ :
  assumes  $\text{sat\_n}$ : satisfiable  $N$ 
  shows satisfiable  $(N \cup \text{concls\_of } (\text{inferences\_from } N))$ 
proof –

```

```

  obtain  $I$  where  $i$ :  $I \models_s N$ 
  using  $\text{sat\_n}$  by blast
  then have  $\bigwedge CC D E. \text{Infer } CC D E \in \Gamma \implies \text{set\_mset } CC \subseteq N \implies D \in N \implies I \models E$ 
  using  $\Gamma_{\text{sound}}$  unfolding true_cls_def true_cls_mset_def by (simp add: subset_eq)
  then have  $\bigwedge \gamma. \gamma \in \Gamma \implies \text{infer\_from } N \ \gamma \implies I \models \text{concl\_of } \gamma$ 
  unfolding infer_from_def by (case_tac  $\gamma$ ) clarsimp
  then have  $I \models_s \text{concls\_of } (\text{inferences\_from } N)$ 
  unfolding inferences_from_def image_def true_cls_def infer_from_def by blast
  then have  $I \models_s N \cup \text{concls\_of } (\text{inferences\_from } N)$ 
  using  $i$  by simp
  then show ?thesis
  by blast
qed

```

```

sublocale  $\text{sat\_preserving\_inference\_system}$ 
by unfold_locales (erule  $\Gamma_{\text{sat\_preserving}}$ )

```

```

end

```

```

locale reductive_inference_system = inference_system  $\Gamma$  for  $\Gamma :: ('a :: \text{wellorder}) \text{ inference set} +$ 
  assumes  $\Gamma_{\text{reductive}}$ :  $\gamma \in \Gamma \implies \text{concl\_of } \gamma < \text{main\_prem\_of } \gamma$ 

```

8.2 Refutational Completeness

Refutational completeness can be established once and for all for counterexample-reducing inference systems. The material formalized here draws from both the general framework of Section 4.2 and the concrete instances of Section 3.

```

locale counterex_reducing_inference_system =
  inference_system  $\Gamma$  for  $\Gamma :: ('a :: \text{wellorder}) \text{ inference set} +$ 
  fixes  $L_{\text{of}} :: 'a \text{ clause set} \Rightarrow 'a \text{ interp}$ 
  assumes  $\Gamma_{\text{counterex\_reducing}}$ :
     $\{\#\} \notin N \implies D \in N \implies \neg L_{\text{of}} N \models D \implies (\bigwedge C. C \in N \implies \neg L_{\text{of}} N \models C \implies D \leq C) \implies$ 
     $\exists CC E. \text{set\_mset } CC \subseteq N \wedge L_{\text{of}} N \models_m CC \wedge \text{Infer } CC D E \in \Gamma \wedge \neg L_{\text{of}} N \models E \wedge E < D$ 
begin

```

```

lemma ex_min_counterex:
  fixes  $N :: ('a :: \text{wellorder}) \text{ clause set}$ 
  assumes  $\neg I \models_s N$ 
  shows  $\exists C \in N. \neg I \models C \wedge (\forall D \in N. D < C \longrightarrow I \models D)$ 

```

```

proof –
  obtain  $C$  where  $C \in N$  and  $\neg I \models C$ 
  using assms unfolding true_cls_def by auto
  then have  $c_{\text{in}}$ :  $C \in \{C \in N. \neg I \models C\}$ 
  by blast
  show ?thesis
  using wf_eq_minimal[THEN iffD1, rule_format, OF wf_less_multiset c_in] by blast

```

qed

theorem *saturated_model*:

assumes

satur: *saturated* *N* **and**

ec_ni_n: $\{\#\} \notin N$

shows *L_of* *N* \models_s *N*

proof –

have *ec_ni_n*: $\{\#\} \notin N$

using *ec_ni_n* **by** *auto*

{

assume \neg *L_of* *N* \models_s *N*

then obtain *D* **where**

d_in_n: *D* \in *N* **and**

d_cex: \neg *L_of* *N* \models *D* **and**

d_min: $\bigwedge C. C \in N \implies C < D \implies$ *L_of* *N* \models *C*

by (*meson ex_min_counterex*)

then obtain *CC* *E* **where**

cc_subs_n: *set_mset* *CC* \subseteq *N* **and**

inf_e: *Infer* *CC* *D* *E* \in Γ **and**

e_cex: \neg *L_of* *N* \models *E* **and**

e_lt_d: *E* $<$ *D*

using Γ .*counterex_reducing*[*OF* *ec_ni_n*] *not_less* **by** *metis*

from *cc_subs_n* *inf_e* **have** *E* \in *N*

using *d_in_n* *satur* **by** (*blast dest: saturatedD*)

then have *False*

using *e_cex* *e_lt_d* *d_min* *not_less* **by** *blast*

}

then show *?thesis*

by *satx*

qed

Cf. Corollary 3.10:

corollary *saturated_complete*: *saturated* *N* \implies \neg *satisfiable* *N* \implies $\{\#\} \in N$

using *saturated_model* **by** *blast*

end

8.3 Compactness

Bachmair and Ganzinger claim that compactness follows from refutational completeness but leave the proof to the readers' imagination. Our proof relies on an inductive definition of saturation in terms of a base set of clauses.

context *inference_system*

begin

inductive-set *saturate* :: 'a clause set \Rightarrow 'a clause set **for** *CC* :: 'a clause set **where**

base: *C* \in *CC* \implies *C* \in *saturate* *CC*

| *step*: *Infer* *CC'* *D* *E* \in $\Gamma \implies (\bigwedge C'. C' \in \# CC' \implies C' \in$ *saturate* *CC*) \implies *D* \in *saturate* *CC* \implies

E \in *saturate* *CC*

lemma *saturate_mono*: *C* \in *saturate* *CC* \implies *CC* \subseteq *DD* \implies *C* \in *saturate* *DD*

by (*induct rule: saturate.induct*) (*auto intro: saturate.intros*)

lemma *saturated_saturate*[*simp*, *intro*]: *saturated* (*saturate* *N*)

unfolding *saturated_def* *inferences_from_def* *infer_from_def* *image_def*

by *clarify* (*rename_tac* *x*, *case_tac* *x*, *auto elim!: saturate.step*)

lemma *saturate_finite*: *C* \in *saturate* *CC* \implies \exists *DD*. *DD* \subseteq *CC* \wedge *finite* *DD* \wedge *C* \in *saturate* *DD*

proof (*induct rule: saturate.induct*)

```

case (base  $C$ )
then have  $\{C\} \subseteq CC$  and  $\text{finite } \{C\}$  and  $C \in \text{saturate } \{C\}$ 
  by (auto intro: saturate.intros)
then show ?case
  by blast
next
case (step  $CC' D E$ )
obtain  $DD_{\text{of}}$  where
   $\bigwedge C. C \in \# CC' \implies DD_{\text{of}} C \subseteq CC \wedge \text{finite } (DD_{\text{of}} C) \wedge C \in \text{saturate } (DD_{\text{of}} C)$ 
  using step(3) by metis
then have
   $(\bigcup C \in \text{set\_mset } CC'. DD_{\text{of}} C) \subseteq CC$ 
   $\text{finite } (\bigcup C \in \text{set\_mset } CC'. DD_{\text{of}} C) \wedge \text{set\_mset } CC' \subseteq \text{saturate } (\bigcup C \in \text{set\_mset } CC'. DD_{\text{of}} C)$ 
  by (auto intro: saturate_mono)
then obtain  $DD$  where
   $d_{\text{sub}}: DD \subseteq CC$  and  $d_{\text{fin}}: \text{finite } DD$  and  $\text{in\_sat\_d}: \text{set\_mset } CC' \subseteq \text{saturate } DD$ 
  by blast
obtain  $EE$  where
   $e_{\text{sub}}: EE \subseteq CC$  and  $e_{\text{fin}}: \text{finite } EE$  and  $\text{in\_sat\_ee}: D \in \text{saturate } EE$ 
  using step(5) by blast
have  $DD \cup EE \subseteq CC$ 
  using  $d_{\text{sub}}$   $e_{\text{sub}}$  step(1) by fast
moreover have  $\text{finite } (DD \cup EE)$ 
  using  $d_{\text{fin}}$   $e_{\text{fin}}$  by fast
moreover have  $E \in \text{saturate } (DD \cup EE)$ 
  using  $\text{in\_sat\_d}$   $\text{in\_sat\_ee}$  step.hyps(1)
  by (blast intro: inference_system.saturate.step saturate_mono)
ultimately show ?case
  by blast

```

qed

end

context *sound_inference_system*

begin

theorem *saturate_sound*: $C \in \text{saturate } CC \implies I \models_s CC \implies I \models C$

by (induct rule: saturate.induct) (auto simp: true_cls_mset_def true_cls_def Γ_{sound})

end

context *sat_preserving_inference_system*

begin

This result surely holds, but we have yet to prove it. The challenge is: Every time a new clause is introduced, we also get a new interpretation (by the definition of *sat_preserving_inference_system*). But the interpretation we want here is then the one that exists "at the limit". Maybe we can use compactness to prove it.

theorem *saturate_sat_preserving*: $\text{satisfiable } CC \implies \text{satisfiable } (\text{saturate } CC)$

oops

end

locale *sound_counterex_reducing_inference_system* =

counterex_reducing_inference_system + *sound_inference_system*

begin

Compactness of clausal logic is stated as Theorem 3.12 for the case of unordered ground resolution. The proof below is a generalization to any sound counterexample-reducing inference system. The actual theorem will become available once the locale has been instantiated with a concrete inference system.

theorem *clausal_logic_compact*:

fixes $N :: ('a :: \text{wellorder}) \text{ clause set}$

shows $\neg \text{satisfiable } N \iff (\exists DD \subseteq N. \text{finite } DD \wedge \neg \text{satisfiable } DD)$

proof

```

assume  $\neg$  satisfiable N
then have  $\{\#\} \in$  saturate N
  using saturated.complete saturated.saturate saturate.base unfolding true.clss_def by meson
then have  $\exists DD \subseteq N. \text{finite } DD \wedge \{\#\} \in$  saturate DD
  using saturate.finite by fastforce
then show  $\exists DD \subseteq N. \text{finite } DD \wedge \neg$  satisfiable DD
  using saturate.sound by auto
next
  assume  $\exists DD \subseteq N. \text{finite } DD \wedge \neg$  satisfiable DD
  then show  $\neg$  satisfiable N
    by (blast intro: true.clss_mono)
qed

end

end

```

9 Candidate Models for Ground Resolution

```

theory Ground_Resolution_Model
  imports Herbrand.Interpretation
begin

```

The proofs of refutational completeness for the two resolution inference systems presented in Section 3 (“Standard Resolution”) of Bachmair and Ganzinger’s chapter share mostly the same candidate model construction. The literal selection capability needed for the second system is ignored by the first one, by taking $\lambda_. \{\}$ as instantiation for the S parameter.

```

locale selection =
  fixes S :: 'a clause  $\Rightarrow$  'a clause
  assumes
    S.selects_subseteq:  $S \ C \subseteq \# \ C$  and
    S.selects_neg_lits:  $L \in \# \ S \ C \Longrightarrow$  is_neg L

```

```

locale ground_resolution_with_selection = selection S
  for S :: ('a :: wellorder) clause  $\Rightarrow$  'a clause
begin

```

The following commands corresponds to Definition 3.14, which generalizes Definition 3.1. *production* C is denoted ε_C in the chapter; *interp* C is denoted I_C ; *Interp* C is denoted I^C ; and *Interp* N is denoted I_N . The mutually recursive definition from the chapter is massaged to simplify the termination argument. The *production_unfold* lemma below gives the intended characterization.

```

context
  fixes N :: 'a clause set
begin

```

```

function production :: 'a clause  $\Rightarrow$  'a interp where
  production C =
     $\{A. C \in N \wedge C \neq \{\#\} \wedge \text{Max.mset } C = \text{Pos } A \wedge \neg (\bigcup D \in \{D. D < C\}. \text{production } D) \models C \wedge S \ C = \{\#\}\}$ 
  by auto
termination by (rule termination[OF wf, simplified])

```

```

declare production.simps [simp del]

```

```

definition interp :: 'a clause  $\Rightarrow$  'a interp where
  interp C =  $(\bigcup D \in \{D. D < C\}. \text{production } D)$ 

```

```

lemma production_unfold:
  production C =  $\{A. C \in N \wedge C \neq \{\#\} \wedge \text{Max.mset } C = \text{Pos } A \wedge \neg \text{interp } C \models C \wedge S \ C = \{\#\}\}$ 
  unfolding interp_def by (rule production.simps)

```

```

abbreviation productive :: 'a clause  $\Rightarrow$  bool where
  productive C  $\equiv$  production C  $\neq \{\}$ 

```

abbreviation *produces* :: 'a clause \Rightarrow 'a \Rightarrow bool **where**
produces C A \equiv production C = {A}

lemma *producesD*: *produces* C A \implies C \in N \wedge C \neq {#} \wedge Pos A = Max_mset C \wedge \neg interp C \models C \wedge S C = {#}
unfolding *production_unfold* **by** *auto*

definition *Interp* :: 'a clause \Rightarrow 'a *interp* **where**
Interp C = *interp* C \cup *production* C

lemma *interp_subseteq_Interp*[*simp*]: *interp* C \subseteq *Interp* C
by (*simp* *add*: *Interp_def*)

lemma *Interp_as_UNION*: *Interp* C = (\bigcup D \in {D. D \leq C}. *production* D)
unfolding *Interp_def* *interp_def* *less_eq_multiset_def* **by** *fast*

lemma *productive_not_empty*: *productive* C \implies C \neq {#}
unfolding *production_unfold* **by** *simp*

lemma *productive_imp_produces_Max_literal*: *productive* C \implies *produces* C (*atm_of* (Max_mset C))
unfolding *production_unfold* **by** (*auto* *simp* *del*: *atm_of_Max_lit*)

lemma *productive_imp_produces_Max_atom*: *productive* C \implies *produces* C (*Max* (*atms_of* C))
unfolding *atms_of_def* *Max_atm_of_set_mset_commute*[*OF* *productive_not_empty*]
by (*rule* *productive_imp_produces_Max_literal*)

lemma *produces_imp_Max_literal*: *produces* C A \implies A = *atm_of* (Max_mset C)
using *productive_imp_produces_Max_literal* **by** *auto*

lemma *produces_imp_Max_atom*: *produces* C A \implies A = *Max* (*atms_of* C)
using *producesD* *produces_imp_Max_literal* **by** *auto*

lemma *produces_imp_Pos_in_lits*: *produces* C A \implies Pos A \in # C
by (*simp* *add*: *producesD*)

lemma *productive_in_N*: *productive* C \implies C \in N
unfolding *production_unfold* **by** *simp*

lemma *produces_imp_atms_leq*: *produces* C A \implies B \in *atms_of* C \implies B \leq A
using *Max.coboundedI* *produces_imp_Max_atom* **by** *blast*

lemma *produces_imp_neg_notin_lits*: *produces* C A \implies \neg Neg A \in # C
by (*simp* *add*: *pos_Max_imp_neg_notin* *producesD*)

lemma *less_eq_imp_interp_subseteq_interp*: C \leq D \implies *interp* C \subseteq *interp* D
unfolding *interp_def* **by** *auto* (*metis* *order.strict_trans2*)

lemma *less_eq_imp_interp_subseteq_Interp*: C \leq D \implies *interp* C \subseteq *Interp* D
unfolding *Interp_def* **using** *less_eq_imp_interp_subseteq_interp* **by** *blast*

lemma *less_imp_production_subseteq_interp*: C < D \implies *production* C \subseteq *interp* D
unfolding *interp_def* **by** *fast*

lemma *less_eq_imp_production_subseteq_Interp*: C \leq D \implies *production* C \subseteq *Interp* D
unfolding *Interp_def* **using** *less_imp_production_subseteq_interp*
by (*metis* *le_imp_less_or_eq* *le_supI1* *sup_ge2*)

lemma *less_imp_Interp_subseteq_interp*: C < D \implies *Interp* C \subseteq *interp* D
by (*simp* *add*: *Interp_def* *less_eq_imp_interp_subseteq_interp* *less_imp_production_subseteq_interp*)

lemma *less_eq_imp_Interp_subseteq_Interp*: C \leq D \implies *Interp* C \subseteq *Interp* D
using *Interp_def* *less_eq_imp_interp_subseteq_Interp* *less_eq_imp_production_subseteq_Interp* **by** *auto*

lemma *not_Interp_to_interp_imp_less*: $A \notin \text{Interp } C \implies A \in \text{interp } D \implies C < D$
using *less_eq_imp_interp_subseteq_Interp not_less by blast*

lemma *not_interp_to_interp_imp_less*: $A \notin \text{interp } C \implies A \in \text{interp } D \implies C < D$
using *less_eq_imp_interp_subseteq_interp not_less by blast*

lemma *not_Interp_to_Interp_imp_less*: $A \notin \text{Interp } C \implies A \in \text{Interp } D \implies C < D$
using *less_eq_imp_Interp_subseteq_Interp not_less by blast*

lemma *not_interp_to_Interp_imp_le*: $A \notin \text{interp } C \implies A \in \text{Interp } D \implies C \leq D$
using *less_imp_Interp_subseteq_interp not_less by blast*

definition *INTERP* :: 'a *interp* **where**
INTERP = $(\bigcup C \in N. \text{production } C)$

lemma *interp_subseteq_INTERP*: $\text{interp } C \subseteq \text{INTERP}$
unfolding *interp_def INTERP_def by (auto simp: production_unfold)*

lemma *production_subseteq_INTERP*: $\text{production } C \subseteq \text{INTERP}$
unfolding *INTERP_def using production_unfold by blast*

lemma *Interp_subseteq_INTERP*: $\text{Interp } C \subseteq \text{INTERP}$
by (simp add: Interp_def interp_subseteq_INTERP production_subseteq_INTERP)

lemma *produces_imp_in_interp*:
assumes *a_in_c*: $\text{Neg } A \in \# C$ **and** *d*: *produces* $D A$
shows $A \in \text{interp } C$
by (metis Interp_def Max_pos_neg_less_multiset UnCI a_in_c d not_interp_to_Interp_imp_le not_less producesD singletonI)

lemma *neg_notin_Interp_not_produce*: $\text{Neg } A \in \# C \implies A \notin \text{Interp } D \implies C \leq D \implies \neg \text{produces } D'' A$
using *less_eq_imp_interp_subseteq_Interp produces_imp_in_interp by blast*

lemma *in_production_imp_produces*: $A \in \text{production } C \implies \text{produces } C A$
using *productive_imp_produces_Max_atom by fastforce*

lemma *not_produces_imp_notin_production*: $\neg \text{produces } C A \implies A \notin \text{production } C$
using *in_production_imp_produces by blast*

lemma *not_produces_imp_notin_interp*: $(\bigwedge D. \neg \text{produces } D A) \implies A \notin \text{interp } C$
unfolding *interp_def by (fast intro!: in_production_imp_produces)*

The results below corresponds to Lemma 3.4.

lemma *Interp_imp_general*:
assumes
c_le_d: $C \leq D$ **and**
d_lt_d': $D < D'$ **and**
c_at_d: $\text{Interp } D \models C$ **and**
subs: $\text{interp } D' \subseteq (\bigcup C \in CC. \text{production } C)$
shows $(\bigcup C \in CC. \text{production } C) \models C$
proof (cases $\exists A. \text{Pos } A \in \# C \wedge A \in \text{Interp } D$)
case True
then obtain A **where** *a_in_c*: $\text{Pos } A \in \# C$ **and** *a_at_d*: $A \in \text{Interp } D$
by blast
from *a_at_d* **have** $A \in \text{interp } D'$
using *d_lt_d'* *less_imp_Interp_subseteq_interp by blast*
then show *?thesis*
using *subs a_in_c by (blast dest: contra_subsetD)*
next
case False
then obtain A **where** *a_in_c*: $\text{Neg } A \in \# C$ **and** $A \notin \text{Interp } D$
using *c_at_d unfolding true_cls_def by blast*
then have $\bigwedge D''. \neg \text{produces } D'' A$

using *c.le_d neg_notin_Interp_not_produce* **by** *simp*
then show *?thesis*
using *a.in_c subs not_produces_imp_notin_production* **by** *auto*
qed

lemma *Interp_imp_interp*: $C \leq D \implies D < D' \implies \text{Interp } D \models C \implies \text{interp } D' \models C$
using *interp_def Interp_imp_general* **by** *simp*

lemma *Interp_imp_Interp*: $C \leq D \implies D \leq D' \implies \text{Interp } D \models C \implies \text{Interp } D' \models C$
using *Interp_as_UNION interp_subseteq_Interp Interp_imp_general* **by** (*metis antisym_conv2*)

lemma *Interp_imp_INTERP*: $C \leq D \implies \text{Interp } D \models C \implies \text{INTERP} \models C$
using *INTERP_def interp_subseteq_INTERP Interp_imp_general[OF le_multiset_right_total]* **by** *simp*

lemma *interp_imp_general*:

assumes

c.le_d: $C \leq D$ **and**

d.le_d': $D \leq D'$ **and**

c.at_d: $\text{interp } D \models C$ **and**

subs: $\text{interp } D' \subseteq (\bigcup C \in CC. \text{production } C)$

shows $(\bigcup C \in CC. \text{production } C) \models C$

proof (*cases* $\exists A. \text{Pos } A \in \# C \wedge A \in \text{interp } D$)

case *True*

then obtain *A* **where** *a.in_c*: $\text{Pos } A \in \# C$ **and** *a.at_d*: $A \in \text{interp } D$
by *blast*

from *a.at_d* **have** $A \in \text{interp } D'$

using *d.le_d' less_eq_imp_interp_subseteq_interp* **by** *blast*

then show *?thesis*

using *subs a.in_c* **by** (*blast dest: contra_subsetD*)

next

case *False*

then obtain *A* **where** *a.in_c*: $\text{Neg } A \in \# C$ **and** $A \notin \text{interp } D$

using *c.at_d unfolding true_cls_def* **by** *blast*

then have $\bigwedge D''. \neg \text{produces } D'' A$

using *c.le_d* **by** (*auto dest: produces_imp_in_interp less_eq_imp_interp_subseteq_interp*)

then show *?thesis*

using *a.in_c subs not_produces_imp_notin_production* **by** *auto*

qed

lemma *interp_imp_interp*: $C \leq D \implies D \leq D' \implies \text{interp } D \models C \implies \text{interp } D' \models C$
using *interp_def interp_imp_general* **by** *simp*

lemma *interp_imp_Interp*: $C \leq D \implies D \leq D' \implies \text{interp } D \models C \implies \text{Interp } D' \models C$
using *Interp_as_UNION interp_subseteq_Interp[of D'] interp_imp_general* **by** *simp*

lemma *interp_imp_INTERP*: $C \leq D \implies \text{interp } D \models C \implies \text{INTERP} \models C$
using *INTERP_def interp_subseteq_INTERP interp_imp_general linear* **by** *metis*

lemma *productive_imp_not_interp*: $\text{productive } C \implies \neg \text{interp } C \models C$
unfolding *production_unfold* **by** *simp*

This corresponds to Lemma 3.3:

lemma *productive_imp_Interp*:

assumes *productive C*

shows $\text{Interp } C \models C$

proof –

obtain *A* **where** *a*: *produces C A*

using *assms productive_imp_produces_Max_atom* **by** *blast*

then have *a.in_c*: $\text{Pos } A \in \# C$

by (*rule produces_imp_Pos_in_lits*)

moreover have $A \in \text{Interp } C$

using *a less_eq_imp_production_subseteq_Interp* **by** *blast*

ultimately show *?thesis*

by fast
qed

lemma *productive_imp_INTERP*: *productive C* \implies *INTERP* \models *C*
by (*fast intro*: *productive_imp_Interp Interp_imp_INTERP*)

This corresponds to Lemma 3.5:

lemma *max_pos_imp_Interp*:
assumes *C* \in *N* and *C* \neq $\{\#\}$ and *Max_mset C = Pos A* and *S C = \{\#\}*
shows *Interp C* \models *C*
proof (*cases productive C*)
case *True*
then show *?thesis*
by (*fast intro*: *productive_imp_Interp*)
next
case *False*
then have *interp C* \models *C*
using *assms unfolding production_unfold* by *simp*
then show *?thesis*
unfolding *Interp_def* using *False* by *auto*
qed

The following results correspond to Lemma 3.6:

lemma *max_atm_imp_Interp*:
assumes
 c_in_n: *C* \in *N* and
 pos_in: *Pos A* \in $\#$ *C* and
 max_atm: *A = Max (atms_of C)* and
 s_c_e: *S C = \{\#\}*
shows *Interp C* \models *C*
proof (*cases Neg A* \in $\#$ *C*)
case *True*
then show *?thesis*
using *pos_in pos_neg_in_imp_true* by *metis*
next
case *False*
moreover have *ne*: *C* \neq $\{\#\}$
using *pos_in* by *auto*
ultimately have *Max_mset C = Pos A*
using *max_atm* using *Max_in_lits Max_lit_eq_pos_or_neg_Max_atm* by *metis*
then show *?thesis*
using *ne c_in_n s_c_e* by (*blast intro*: *max_pos_imp_Interp*)
qed

lemma *not_Interp_imp_general*:
assumes
 d'_le_d: *D'* \leq *D* and
 in_n_or_max_gt: *D'* \in *N* \wedge *S D' = \{\#\} \vee *Max (atms_of D') < Max (atms_of D)* and
 d'_at_d: \neg *Interp D* \models *D'* and
 d_lt_c: *D* $<$ *C* and
 subs: *interp C* \subseteq (\bigcup *C* \in *CC*. *production C*)
shows \neg (\bigcup *C* \in *CC*. *production C*) \models *D'*
proof –
{
 assume *cc_blw_d'*: (\bigcup *C* \in *CC*. *production C*) \models *D'*
 have *Interp D* \subseteq (\bigcup *C* \in *CC*. *production C*)
 using *less_imp_Interp_subseteq_interp d_lt_c subs* by *blast*
 then obtain *A* where *a_in_d'*: *Pos A* \in $\#$ *D'* and *a_blw_cc*: *A* \in (\bigcup *C* \in *CC*. *production C*)
 using *cc_blw_d' d'_at_d false_to_true_imp_ex_pos* by *metis*
 from *a_in_d'* have *a_at_d*: *A* \notin *Interp D*
 using *d'_at_d* by *fast*
 from *a_blw_cc* obtain *C'* where *prod_c'*: *production C' = \{A\}*
 by (*fast intro!*: *in_production_imp_produces*)*


```

have max_c': Max (atms_of C') = A
  using prod_c' productive_imp_produces_Max_atom by force
have leq_dc': D ≤ C'
  using a_at_d d'_at_d prod_c' by (auto simp: Interp_def intro: not_interp_to_Interp_imp_le)
then have D' ≤ C'
  using d'_le_d order_trans by blast
then have max_d': Max (atms_of D') = A
  using a_in_d' max_c' by (fast intro: pos_lit_in_atms_of_le_multiset_Max_in_imp_Max)

{
  assume D' ∈ N ∧ S D' = {#}
  then have Interp D' ⊨ D'
    using a_in_d' max_d' by (blast intro: max_atm_imp_Interp)
  then have Interp D ⊨ D'
    using d'_le_d by (auto intro: Interp_imp_Interp simp: less_eq_multiset_def)
  then have False
    using d'_at_d by satx
}
moreover
{
  assume Max (atms_of D') < Max (atms_of D)
  then have False
    using max_d' leq_dc' max_c' d'_le_d
    by (metis le_imp_less_or_eq le_multiset_empty_right less_eq_Max_atms_of less_imp_not_less)
}
ultimately have False
  using in_n_or_max_gt by satx
}
then show ?thesis
  by satx
qed

```

lemma *not_Interp_imp_not_interp*:
 $D' \leq D \implies D' \in N \wedge S D' = \{\#\} \vee \text{Max}(\text{atms_of } D') < \text{Max}(\text{atms_of } D) \implies \neg \text{Interp } D \models D' \implies D < C \implies \neg \text{interp } C \models D'$
 using *interp_def not_Interp_imp_general* by *simp*

lemma *not_Interp_imp_not_Interp*:
 $D' \leq D \implies D' \in N \wedge S D' = \{\#\} \vee \text{Max}(\text{atms_of } D') < \text{Max}(\text{atms_of } D) \implies \neg \text{Interp } D \models D' \implies D < C \implies \neg \text{Interp } C \models D'$
 using *Interp_as_UNION interp_subseteq_Interp not_Interp_imp_general* by *metis*

lemma *not_Interp_imp_not_INTERP*:
 $D' \leq D \implies D' \in N \wedge S D' = \{\#\} \vee \text{Max}(\text{atms_of } D') < \text{Max}(\text{atms_of } D) \implies \neg \text{Interp } D \models D' \implies \neg \text{INTERP} \models D'$
 using *INTERP_def interp_subseteq_INTERP not_Interp_imp_general[OF _ _ _ le_multiset_right_total]*
 by *simp*

Lemma 3.7 is a problem child. It is stated below but not proved; instead, a counterexample is displayed. This is not much of a problem, because it is not invoked in the rest of the chapter.

lemma
 assumes $D \in N$ and $\bigwedge D'. D' < D \implies \text{Interp } D' \models C$
 shows $\text{interp } D \models C$
 oops

lemma
 assumes $d: D = \{\#\}$ and $n: N = \{D, C\}$ and $c: C = \{\#\text{Pos } A\#$
 shows $D \in N$ and $\bigwedge D'. D' < D \implies \text{Interp } D' \models C$ and $\neg \text{interp } D \models C$
 using n unfolding $d c$ *interp_def* by *auto*

end

end

end

10 Ground Unordered Resolution Calculus

```
theory Unordered_Ground_Resolution
  imports Inference_System Ground_Resolution_Model
begin
```

Unordered ground resolution is one of the two inference systems studied in Section 3 (“Standard Resolution”) of Bachmair and Ganzinger’s chapter.

10.1 Inference Rule

Unordered ground resolution consists of a single rule, called *unord_resolve* below, which is sound and counterexample-reducing.

```
locale ground_resolution_without_selection
begin
```

```
sublocale ground_resolution_with_selection where S = λ_. {#}
  by unfold_locales auto
```

```
inductive unord_resolve :: 'a clause ⇒ 'a clause ⇒ 'a clause ⇒ bool where
  unord_resolve (C + replicate_mset (Suc n) (Pos A)) (add_mset (Neg A) D) (C + D)
```

```
lemma unord_resolve_sound: unord_resolve C D E ⇒ I ⊨ C ⇒ I ⊨ D ⇒ I ⊨ E
  using unord_resolve.cases by fastforce
```

The following result corresponds to Theorem 3.8, except that the conclusion is strengthened slightly to make it fit better with the counterexample-reducing inference system framework.

```
theorem unord_resolve_counterex_reducing:
```

```
  assumes
    ec_ni_n: {#} ∉ N and
    c_in_n: C ∈ N and
    c_cex: ¬ INTERP N ⊨ C and
    c_min: ∧D. D ∈ N ⇒ ¬ INTERP N ⊨ D ⇒ C ≤ D
  obtains D E where
    D ∈ N
    INTERP N ⊨ D
    productive N D
    unord_resolve D C E
    ¬ INTERP N ⊨ E
    E < C
```

```
proof -
```

```
  have c_ne: C ≠ {#}
    using c_in_n ec_ni_n by blast
  have ∃A. A ∈ atms_of C ∧ A = Max (atms_of C)
    using c_ne by (blast intro: Max_in_lits atm_of_Max_lit atm_of_lit_in_atms_of)
  then have ∃A. Neg A ∈# C
    using c_ne c_in_n c_cex c_min Max_in_lits Max_lit_eq_pos_or_neg_Max_atm max_pos_imp_Interp
      Interp_imp_INTERP by metis
  then obtain A where neg_a_in_c: Neg A ∈# C
    by blast
  then obtain C' where c: C = add_mset (Neg A) C'
    using insert_DiffM by metis
  have A ∈ INTERP N
    using neg_a_in_c c_cex[unfolded true_cls_def] by fast
  then obtain D where d0: produces N D A
    unfolding INTERP_def by (metis UN_E not_produces_imp_notin_production)
  have prod_d: productive N D
    unfolding d0 by simp
```

```

then have  $d.in.n: D \in N$ 
  using productive.in.N by fast
have  $d.true: INTERP\ N \models D$ 
  using prod_d productive_imp_INTERP by blast

obtain  $D' AAA$  where
   $d: D = D' + AAA$  and
   $d': D' = \{\#L \in \# D. L \neq Pos\ A\#\}$  and
   $aa: AAA = \{\#L \in \# D. L = Pos\ A\#\}$ 
  using multiset_partition_union_commute by metis
have  $d'_subs: set.mset\ D' \subseteq set.mset\ D$ 
  unfolding  $d'$  by auto
have  $\neg Neg\ A \in \# D$ 
  using  $d0$  by (blast dest: produces_imp_neg_notin_lits)
then have  $neg.a.ni.d': \neg Neg\ A \in \# D'$ 
  using  $d'_subs$  by auto
have  $a.ni.d': A \notin atms\_of\ D'$ 
  using  $d'\ neg.a.ni.d'$  by (auto dest: atm_imp_pos_or_neg_lit)
have  $\exists n. AAA = replicate\_mset\ (Suc\ n)\ (Pos\ A)$ 
  using  $aa\ d0\ not0\_implies\_Suc\ produces\_imp\_Pos\_in\_lits[of\ N]$ 
  by (simp add: filter_eq_replicate_mset del: replicate_mset_Suc)
then have  $res.e: unord\_resolve\ D\ C\ (D' + C')$ 
  unfolding  $c\ d$  by (fastforce intro: unord_resolve.intros)

have  $d'_le.d: D' \leq D$ 
  unfolding  $d$  by simp
have  $a.max.d: A = Max\ (atms\_of\ D)$ 
  using  $d0\ productive\_imp\_produces\_Max\_atom$  by auto
then have  $D' \neq \{\#\} \implies Max\ (atms\_of\ D') \leq A$ 
  using  $d'_le.d$  by (blast intro: less_eq_Max_atms_of)
moreover have  $D' \neq \{\#\} \implies Max\ (atms\_of\ D') \neq A$ 
  using  $a.ni.d'$  Max.in by (blast intro: atms_empty_iff_empty[THEN iffD1])
ultimately have  $max.d'_lt.a: D' \neq \{\#\} \implies Max\ (atms\_of\ D') < A$ 
  using dual_order.strict_iff_order by blast

have  $\neg interp\ N\ D \models D$ 
  using  $d0\ productive\_imp\_not\_interp$  by blast
then have  $\neg Interp\ N\ D \models D'$ 
  unfolding  $d0\ d'\ Interp\_def\ true\_cls\_def$  by (auto simp: true_lit_def simp del: not_gr_zero)
then have  $\neg INTERP\ N \models D'$ 
  using  $a.max.d\ d'_le.d\ max.d'_lt.a\ not\_Interp\_imp\_not\_INTERP$  by blast
moreover have  $\neg INTERP\ N \models C'$ 
  using  $c.cex$  unfolding  $c$  by simp
ultimately have  $e.cex: \neg INTERP\ N \models D' + C'$ 
  by simp

have  $\bigwedge B. B \in atms\_of\ D' \implies B \leq A$ 
  using  $d0\ d'_subs\ contra\_subsetD\ lits\_subsetq\_imp\_atms\_subsetq\ produces\_imp\_atms\_leq$  by metis
then have  $\bigwedge L. L \in \# D' \implies L < Neg\ A$ 
  using  $neg.a.ni.d'\ antisym\_conv1\ atms\_less\_eq\_imp\_lit\_less\_eq\_neg$  by metis
then have  $lt.cex: D' + C' < C$ 
  by (force intro: add commute simp: c less_multiset_DM intro: exI[of - {\#Neg A\#}])

from  $d.in.n\ d.true\ prod_d\ res.e\ e.cex\ lt.cex$  show ?thesis ..
qed

```

10.2 Inference System

Theorem 3.9 and Corollary 3.10 are subsumed in the counterexample-reducing inference system framework, which is instantiated below.

definition $unord.\Gamma :: 'a\ inference\ set$ **where**
 $unord.\Gamma = \{Infer\ \{\#C\#\}\ D\ E\ | C\ D\ E.\ unord_resolve\ C\ D\ E\}$

```

sublocale unord_Γ_sound_counterex_reducing?:
  sound_counterex_reducing_inference_system unord_Γ INTERP
proof unfold_locales
  fix D E and N :: ('b :: wellorder) clause set
  assume {#} ∉ N and D ∈ N and ¬ INTERP N ⊨ D and ∧C. C ∈ N ⇒ ¬ INTERP N ⊨ C ⇒ D ≤ C
  then obtain C E where
    c_in_n: C ∈ N and
    c_true: INTERP N ⊨ C and
    res_e: unord_resolve C D E and
    e_cex: ¬ INTERP N ⊨ E and
    e_lt_d: E < D
  using unord_resolve_counterex_reducing by (metis (no_types))
  from c_in_n have set_mset {#C#} ⊆ N
  by auto
  moreover have Infer {#C#} D E ∈ unord_Γ
  unfolding unord_Γ_def using res_e by blast
  ultimately show
    ∃ CC E. set_mset CC ⊆ N ∧ INTERP N ⊨m CC ∧ Infer CC D E ∈ unord_Γ ∧ ¬ INTERP N ⊨ E ∧ E < D
  using c_in_n c_true e_cex e_lt_d by blast
next
  fix CC D E and I :: 'b interp
  assume Infer CC D E ∈ unord_Γ and I ⊨m CC and I ⊨ D
  then show I ⊨ E
  by (clarsimp simp: unord_Γ_def true_cls_mset_def) (erule unord_resolve_sound, auto)
qed

```

lemmas clausal_logic_compact = unord_Γ_sound_counterex_reducing.clausal_logic_compact

end

Theorem 3.12, compactness of clausal logic, has finally been derived for a concrete inference system:

lemmas clausal_logic_compact = ground_resolution_without_selection.clausal_logic_compact

end

11 Ground Ordered Resolution Calculus with Selection

```

theory Ordered_Ground_Resolution
  imports Inference_System Ground_Resolution_Model
begin

```

Ordered ground resolution with selection is the second inference system studied in Section 3 (“Standard Resolution”) of Bachmair and Ganzinger’s chapter.

11.1 Inference Rule

Ordered ground resolution consists of a single rule, called *ord_resolve* below. Like *unord_resolve*, the rule is sound and counterexample-reducing. In addition, it is reductive.

```

context ground_resolution_with_selection
begin

```

The following inductive definition corresponds to Figure 2.

```

definition maximal_wrt :: 'a ⇒ 'a literal multiset ⇒ bool where
  maximal_wrt A DA ≡ A = Max (atms_of DA)

```

```

definition strictly_maximal_wrt :: 'a ⇒ 'a literal multiset ⇒ bool where
  strictly_maximal_wrt A CA ⇔ (∀ B ∈ atms_of CA. B < A)

```

```

inductive eligible :: 'a list ⇒ 'a clause ⇒ bool where
  eligible: (S DA = negs (mset As)) ∨ (S DA = {#} ∧ length As = 1 ∧ maximal_wrt (As ! 0) DA) ⇒
  eligible As DA

```

lemma $(S \ DA = \text{negs } (\text{mset } As) \vee S \ DA = \{\#\} \wedge \text{length } As = 1 \wedge \text{maximal_wrt } (As \ ! \ 0) \ DA) \longleftrightarrow$
 $\text{eligible } As \ DA$
using *eligible.intros ground_resolution_with_selection.eligible.cases ground_resolution_with_selection_axioms* **by** *blast*

inductive

ord_resolve :: 'a clause list \Rightarrow 'a clause \Rightarrow 'a multiset list \Rightarrow 'a list \Rightarrow 'a clause \Rightarrow bool

where

ord_resolve:
 $\text{length } CAs = n \implies$
 $\text{length } Cs = n \implies$
 $\text{length } AAs = n \implies$
 $\text{length } As = n \implies$
 $n \neq 0 \implies$
 $(\forall i < n. CAs \ ! \ i = Cs \ ! \ i + \text{poss } (AAs \ ! \ i)) \implies$
 $(\forall i < n. AAs \ ! \ i \neq \{\#\}) \implies$
 $(\forall i < n. \forall A \in \# \ AAs \ ! \ i. A = As \ ! \ i) \implies$
 $\text{eligible } As \ (D + \text{negs } (\text{mset } As)) \implies$
 $(\forall i < n. \text{strictly_maximal_wrt } (As \ ! \ i) \ (Cs \ ! \ i)) \implies$
 $(\forall i < n. S \ (CAs \ ! \ i) = \{\#\}) \implies$
 $\text{ord_resolve } CAs \ (D + \text{negs } (\text{mset } As)) \ AAs \ As \ (\bigcup \# \ (\text{mset } Cs) + D)$

lemma *ord_resolve_sound*:

assumes

res_e: *ord_resolve* *CAs* *DA* *AAs* *As* *E* **and**
cc_true: $I \models_m \text{mset } CAs$ **and**
d_true: $I \models DA$

shows $I \models E$

using *res_e*

proof (*cases* rule: *ord_resolve.cases*)

case (*ord_resolve* *n* *Cs* *D*)

note $DA = \text{this}(1)$ **and** $e = \text{this}(2)$ **and** $\text{cas_len} = \text{this}(3)$ **and** $\text{cs_len} = \text{this}(4)$ **and**
 $\text{as_len} = \text{this}(6)$ **and** $\text{cas} = \text{this}(8)$ **and** $\text{aas_ne} = \text{this}(9)$ **and** $\text{a_eq} = \text{this}(10)$

show *?thesis*

proof (*cases* $\forall A \in \text{set } As. A \in I$)

case *True*

then have $\neg I \models \text{negs } (\text{mset } As)$

unfolding *true_cls_def* **by** *fastforce*

then have $I \models D$

using *d_true* *DA* **by** *fast*

then show *?thesis*

unfolding *e* **by** *blast*

next

case *False*

then obtain *i* **where**

a_in_aa: $i < n$ **and**

a_false: $As \ ! \ i \notin I$

using *cas_len* *as_len* **by** (*metis in_set_conv_nth*)

have $\neg I \models \text{poss } (AAs \ ! \ i)$

using *a_false* *a_eq* *aas_ne* *a_in_aa* **unfolding** *true_cls_def* **by** *auto*

moreover have $I \models CAs \ ! \ i$

using *a_in_aa* *cc_true* **unfolding** *true_cls_mset_def* **using** *cas_len* **by** *auto*

ultimately have $I \models Cs \ ! \ i$

using *cas* *a_in_aa* **by** *auto*

then show *?thesis*

using *a_in_aa* *cs_len* **unfolding** *e* *true_cls_def*

by (*meson in_Union_mset_iff_nth_mem_mset_union_iff*)

qed

qed

lemma *filter_neg_atm_of_S*: $\{\#\text{Neg } (\text{atm_of } L). L \in \# \ S \ C \#\} = S \ C$

by (*simp add: S_selects_neg_lits*)

This corresponds to Lemma 3.13:

lemma *ord_resolve_reductive*:

assumes *ord_resolve CAs DA AAs As E*

shows $E < DA$

using *assms*

proof (*cases rule: ord_resolve.cases*)

case (*ord_resolve n Cs D*)

note $DA = \text{this}(1)$ **and** $e = \text{this}(2)$ **and** $\text{cas.len} = \text{this}(3)$ **and** $\text{cs.len} = \text{this}(4)$ **and**
 $\text{ai.len} = \text{this}(6)$ **and** $\text{nz} = \text{this}(7)$ **and** $\text{cas} = \text{this}(8)$ **and** $\text{maxim} = \text{this}(12)$

show *?thesis*

proof (*cases* $\bigcup\# (\text{mset } Cs) = \{\#\}$)

case *True*

have $\text{negs } (\text{mset } As) \neq \{\#\}$

using nz ai.len **by** *auto*

then show *?thesis*

unfolding *True e DA* **by** *auto*

next

case *False*

define *max_A_of-Cs* **where** $\text{max_A_of_Cs} = \text{Max } (\text{atms_of } (\bigcup\# (\text{mset } Cs)))$

have

mc.in: $\text{max_A_of_Cs} \in \text{atms_of } (\bigcup\# (\text{mset } Cs))$ **and**

mc.max: $\bigwedge B. B \in \text{atms_of } (\bigcup\# (\text{mset } Cs)) \implies B \leq \text{max_A_of_Cs}$

using *max_A_of-Cs_def False* **by** *auto*

then have $\exists C_max \in \text{set } Cs. \text{max_A_of_Cs} \in \text{atms_of } (C_max)$

by (*metis atm_imp_pos_or_neg_lit in_Union_mset_iff neg_lit_in_atms_of pos_lit_in_atms_of set_mset_mset*)

then obtain *max_i* **where**

cm.in.cas: $\text{max}_i < \text{length } CAs$ **and**

mc.in.cm: $\text{max_A_of_Cs} \in \text{atms_of } (Cs ! \text{max}_i)$

using *in_set_conv_nth[of _ CAs]* **by** (*metis cas.len cs.len in_set_conv_nth*)

define *CA_max* **where** $CA_max = CAs ! \text{max}_i$

define *A_max* **where** $A_max = As ! \text{max}_i$

define *C_max* **where** $C_max = Cs ! \text{max}_i$

have *mc.lt.ma*: $\text{max_A_of_Cs} < A_max$

using *maxim cm.in.cas mc.in.cm cas.len* **unfolding** *strictly_maximal_wrt_def A_max_def* **by** *auto*

then have *ucas.ne_neg_aa*: $\bigcup\# (\text{mset } Cs) \neq \text{negs } (\text{mset } As)$

using *mc.in mc.max mc.lt.ma cm.in.cas cas.len ai.len* **unfolding** *A_max_def*

by (*metis atms_of_negs nth_mem set_mset_mset leD*)

moreover have *ucas.lt_ma*: $\forall B \in \text{atms_of } (\bigcup\# (\text{mset } Cs)). B < A_max$

using *mc.max mc.lt_ma* **by** *fastforce*

moreover have $\neg \text{Neg } A_max \in\# \bigcup\# (\text{mset } Cs)$

using *ucas.lt_ma neg_lit_in_atms_of[of A_max $\bigcup\# (\text{mset } Cs)$]* **by** *auto*

moreover have $\text{Neg } A_max \in\# \text{negs } (\text{mset } As)$

using *cm.in.cas cas.len ai.len A_max_def* **by** *auto*

ultimately have $\bigcup\# (\text{mset } Cs) < \text{negs } (\text{mset } As)$

unfolding *less_multiset_HO*

by (*metis (no.types) atms_less_eq_imp_lit_less_eq_neg count_greater_zero_iff count.inI le_imp_less_or_eq less_imp_not_less not_le*)

then show *?thesis*

unfolding *e DA* **by** *auto*

qed

qed

This corresponds to Theorem 3.15:

theorem *ord_resolve_counterex_reducing*:

assumes

ec_ni_n: $\{\#\} \notin N$ **and**

d_in_n: $DA \in N$ **and**

d_cex: $\neg \text{INTERP } N \models DA$ **and**

d_min: $\bigwedge C. C \in N \implies \neg \text{INTERP } N \models C \implies DA \leq C$

obtains *CA*s *AA*s *As* *E* **where**

*set CA*s $\subseteq N$

$\text{INTERP } N \models m \text{ mset } CAs$

$\bigwedge CA. CA \in \text{set } CAs $\implies \text{productive } N CA$$

*ord_resolve CA*s *DA* *AA*s *As* *E*

$\neg \text{INTERP } N \models E$

$E < DA$

proof –

have *d_ne*: $DA \neq \{\#\}$

using *d_in_n ec_ni_n* **by** *blast*

have $\exists As. As \neq [] \wedge \text{negs } (\text{mset } As) \leq\# DA \wedge \text{eligible } As DA$

proof (*cases S DA = \{\#\}*)

assume *s_d_e*: $S DA = \{\#\}$

define *A* **where** $A = \text{Max } (\text{atms_of } DA)$

define *As* **where** $As = [A]$

define *D* **where** $D = DA - \{\#\text{Neg } A \#\}$

have *na_in_d*: $\text{Neg } A \in\# DA$

unfolding *A_def* **using** *s_d_e d_ne d_in_n d_cex d_min*

by (*metis Max_in_lits Max_lit_eq_pos_or_neg_Max_atm max_pos_imp_Interp Interp_imp_INTERP*)

then have *das*: $DA = D + \text{negs } (\text{mset } As)$ **unfolding** *D_def As_def* **by** *auto*

moreover from *na_in_d* **have** $\text{negs } (\text{mset } As) \subseteq\# DA$

by (*simp add: As_def*)

moreover have $As ! 0 = \text{Max } (\text{atms_of } (D + \text{negs } (\text{mset } As)))$

using *A_def As_def das* **by** *auto*

then have *eligible As DA*

using *eligible s_d_e As_def das maximal_wrt_def* **by** *auto*

ultimately show *?thesis*

using *As_def* **by** *blast*

next

assume *s_d_e*: $S DA \neq \{\#\}$

define *As* :: 'a list **where**

$As = \text{list_of_mset } \{\#\text{atm_of } L. L \in\# S DA\#\}$

define *D* :: 'a clause **where**

$D = DA - \text{negs } \{\#\text{atm_of } L. L \in\# S DA\#\}$

have $As \neq []$ **unfolding** *As_def* **using** *s_d_e*

by (*metis image_mset_is_empty_iff list_of_mset_empty*)

moreover have *da_sub_as*: $\text{negs } \{\#\text{atm_of } L. L \in\# S DA\#\} \subseteq\# DA$

using *S_selects_subseteq* **by** (*auto simp: filter_neg_atm_of_S*)

then have $\text{negs } (\text{mset } As) \subseteq\# DA$

unfolding *As_def* **by** *auto*

moreover have *das*: $DA = D + \text{negs } (\text{mset } As)$

using *da_sub_as* **unfolding** *D_def As_def* **by** *auto*

moreover have $S DA = \text{negs } \{\#\text{atm_of } L. L \in\# S DA\#\}$

by (*auto simp: filter_neg_atm_of_S*)

then have $S DA = \text{negs } (\text{mset } As)$

unfolding *As_def* **by** *auto*

then have *eligible As DA*

unfolding *das* **using** *eligible* **by** *auto*

ultimately show *?thesis*

by *blast*

qed

then obtain *As* :: 'a list **where**

as_ne: $As \neq []$ **and**

```

negs_as_le_d: negs (mset As) ≤# DA and
s.d: eligible As DA
by blast

define D :: 'a clause where
  D = DA - negs (mset As)

have set As ⊆ INTERP N
  using d_cex negs_as_le_d by force
then have prod_ex: ∀ A ∈ set As. ∃ D. produces N D A
  unfolding INTERP_def
  by (metis (no_types, lifting) INTERP_def subsetCE UN_E not_produces_imp_notin_production)
then have ∧A. ∃ D. produces N D A → A ∈ set As
  using ec_ni_n by (auto intro: productive_in_N)
then have ∧A. ∃ D. produces N D A ↔ A ∈ set As
  using prod_ex by blast
then obtain CA_of where c_of0: ∧A. produces N (CA_of A) A ↔ A ∈ set As
  by metis
then have prod_c0: ∀ A ∈ set As. produces N (CA_of A) A
  by blast

define C_of where
  ∧A. C_of A = {#L ∈# CA_of A. L ≠ Pos A#}
define Aj_of where
  ∧A. Aj_of A = image_mset atm_of {#L ∈# CA_of A. L = Pos A#}

have pospos: ∧LL A. {#Pos (atm_of x). x ∈# {#L ∈# LL. L = Pos A#}#} = {#L ∈# LL. L = Pos A#}
  by (metis (mono_tags, lifting) image_filter_cong literal.sel(1) multiset.map_ident)
have ca_of_c_of_aj_of: ∧A. CA_of A = C_of A + poss (Aj_of A)
  using pospos[of _ CA_of _] by (simp add: C_of_def Aj_of_def)

define n :: nat where
  n = length As
define Cs :: 'a clause list where
  Cs = map C_of As
define AAs :: 'a multiset list where
  AAs = map Aj_of As
define CAs :: 'a literal multiset list where
  CAs = map CA_of As

have m_nz: ∧A. A ∈ set As ⇒ Aj_of A ≠ {#}
  unfolding Aj_of_def using prod_c0 produces_imp_Pos_in_lits
  by (metis (full_types) filter_mset_empty_conv image_mset_is_empty_iff)

have prod_c: productive N CA if ca_in: CA ∈ set CAs for CA
proof -
  obtain i where i_p: i < length CAs CAs ! i = CA
    using ca_in by (meson in_set_conv_nth)
  have production N (CA_of (As ! i)) = {As ! i}
    using i_p CAs_def prod_c0 by auto
  then show productive N CA
    using i_p CAs_def by auto
qed
then have cs_subs_n: set CAs ⊆ N
  using productive_in_N by auto
have cs_true: INTERP N ⊨m mset CAs
  unfolding true_cls_mset_def using prod_c productive_imp_INTERP by auto

have ∧A. A ∈ set As ⇒ ¬ Neg A ∈# CA_of A
  using prod_c0 produces_imp_neg_notin_lits by auto
then have a_ni_c': ∧A. A ∈ set As ⇒ A ∉ atms_of (C_of A)
  unfolding C_of_def using atm_imp_pos_or_neg_lit by force
have c'_le_c: ∧A. C_of A ≤ CA_of A

```


unfolding C_of_def **by** (*auto intro: subset_eq_imp_le_multiset*)
have $a_max_c: \bigwedge A. A \in set\ As \implies A = Max\ (atms_of\ (CA_of\ A))$
using $prod_c0\ productive_imp_produces_Max_atom[of\ N]$ **by** *auto*
then have $\bigwedge A. A \in set\ As \implies C_of\ A \neq \{\#\} \implies Max\ (atms_of\ (C_of\ A)) \leq A$
using c'_le_c **by** (*metis less_eq_Max_atms_of*)
moreover have $\bigwedge A. A \in set\ As \implies C_of\ A \neq \{\#\} \implies Max\ (atms_of\ (C_of\ A)) \neq A$
using a_ni_c' **Max_in** **by** (*metis (no_types) atms_empty_iff_empty finite_atms_of*)
ultimately have $max_c'_lt_a: \bigwedge A. A \in set\ As \implies C_of\ A \neq \{\#\} \implies Max\ (atms_of\ (C_of\ A)) < A$
by (*metis order.strict_iff_order*)

have $le_cs_as: length\ CAs = length\ As$
unfolding CAs_def **by** *simp*

have $length\ CAs = n$
by (*simp add: le_cs_as n_def*)
moreover have $length\ Cs = n$
by (*simp add: Cs_def n_def*)
moreover have $length\ AAs = n$
by (*simp add: AAs_def n_def*)
moreover have $length\ As = n$
using n_def **by** *auto*
moreover have $n \neq 0$
by (*simp add: as_ne n_def*)
moreover have $\forall i. i < length\ AAs \longrightarrow (\forall A \in\# AAs ! i. A = As ! i)$
using $AAs_def\ Aj_of_def$ **by** *auto*

have $\bigwedge x B. production\ N\ (CA_of\ x) = \{x\} \implies B \in\# CA_of\ x \implies B \neq Pos\ x \implies atm_of\ B < x$
by (*metis atm_of_lit_in_atms_of insert_not_empty le_imp_less_or_eq Pos_atm_of_iff Neg_atm_of_iff pos_neg_in_imp_true produces_imp_Pos_in_lits produces_imp_atms_leq productive_imp_not_interp*)
then have $\bigwedge B A. A \in set\ As \implies B \in\# CA_of\ A \implies B \neq Pos\ A \implies atm_of\ B < A$
using $prod_c0$ **by** *auto*
have $\forall i. i < length\ AAs \longrightarrow AAs ! i \neq \{\#\}$
unfolding AAs_def **using** m_nz **by** *simp*
have $\forall i < n. CAs ! i = Cs ! i + poss\ (AAs ! i)$
unfolding $CAs_def\ Cs_def\ AAs_def$ **using** $ca_of_c_of_aj_of$ **by** (*simp add: n_def*)

moreover have $\forall i < n. AAs ! i \neq \{\#\}$
using $\langle \forall i < length\ AAs. AAs ! i \neq \{\#\} \rangle$ $calculation(3)$ **by** *blast*
moreover have $\forall i < n. \forall A \in\# AAs ! i. A = As ! i$
by (*simp add: $\langle \forall i < length\ AAs. \forall A \in\# AAs ! i. A = As ! i \rangle$ calculation(3)*)
moreover have $eligible\ As\ DA$
using s_d **by** *auto*
then have $eligible\ As\ (D + negs\ (mset\ As))$
using $D_def\ negs_as_le_d$ **by** *auto*
moreover have $\bigwedge i. i < length\ AAs \implies strictly_maximal_wrt\ (As ! i)\ ((Cs ! i))$
by (*simp add: C_of_def Cs_def $\langle \bigwedge x B. \llbracket production\ N\ (CA_of\ x) = \{x\}; B \in\# CA_of\ x; B \neq Pos\ x \rrbracket \implies atm_of\ B < x \rangle$ atms_of_def calculation(3) n_def prod_c0 strictly_maximal_wrt_def*)

have $\forall i < n. strictly_maximal_wrt\ (As ! i)\ (Cs ! i)$
by (*simp add: $\langle \bigwedge i. i < length\ AAs \implies strictly_maximal_wrt\ (As ! i)\ (Cs ! i) \rangle$ calculation(3)*)
moreover have $\forall CA \in set\ CAs. S\ CA = \{\#\}$
using $prod_c\ producesD\ productive_imp_produces_Max_literal$ **by** *blast*
have $\forall CA \in set\ CAs. S\ CA = \{\#\}$
using $\langle \forall CA \in set\ CAs. S\ CA = \{\#\} \rangle$ **by** *simp*
then have $\forall i < n. S\ (CAs ! i) = \{\#\}$
using $\langle length\ CAs = n \rangle$ nth_mem **by** *blast*
ultimately have $res_e: ord_resolve\ CAs\ (D + negs\ (mset\ As))\ AAs\ As\ (\bigcup\# (mset\ Cs) + D)$
using $ord_resolve$ **by** *auto*

have $\bigwedge A. A \in set\ As \implies \neg\ interp\ N\ (CA_of\ A) \models CA_of\ A$
by (*simp add: prod_c0 producesD*)
then have $\bigwedge A. A \in set\ As \implies \neg\ Interp\ N\ (CA_of\ A) \models C_of\ A$

unfolding *prod_c0 C_of_def Interp_def true_cls_def* **using** *true_lit_def not_gr_zero prod_c0*
by *auto*
then have $c'_{at.n}: \bigwedge A. A \in \text{set } As \implies \neg \text{INTERP } N \models C_{of } A$
using *a_max_c c'_le_c max_c'_lt_a not_Interp_imp_not_INTERP* **unfolding** *true_cls_def*
by (*metis true_cls_def true_cls_empty*)

have $\neg \text{INTERP } N \models \bigcup \# (mset \ Cs)$
unfolding *Cs_def true_cls_def* **using** *c'_at.n* **by** *fastforce*
moreover have $\neg \text{INTERP } N \models D$
using *d_cex* **by** (*metis D_def add_diff_cancel_right' negs_as_le_d subset_mset.add_diff_assoc2*
true_cls_def union_iff)
ultimately have $e_{cex}: \neg \text{INTERP } N \models \bigcup \# (mset \ Cs) + D$
by *simp*

have $\text{set } CAs \subseteq N$
by (*simp add: cs_subs_n*)
moreover have $\text{INTERP } N \models_m mset \ CAs$
by (*simp add: cs_true*)
moreover have $\bigwedge CA. CA \in \text{set } CAs \implies \text{productive } N \ CA$
by (*simp add: prod_c*)
moreover have $\text{ord_resolve } CAs \ DA \ AAs \ As \ (\bigcup \# (mset \ Cs) + D)$
using *D_def negs_as_le_d res_e* **by** *auto*
moreover have $\neg \text{INTERP } N \models \bigcup \# (mset \ Cs) + D$
using *e_cex* **by** *simp*
moreover have $\bigcup \# (mset \ Cs) + D < DA$
using *calculation(4) ord_resolve_reductive* **by** *auto*
ultimately show *thesis*
..
qed

lemma *ord_resolve_atms_of_concl_subset:*
assumes *ord_resolve CAs DA AAs As E*
shows $\text{atms_of } E \subseteq (\bigcup C \in \text{set } CAs. \text{atms_of } C) \cup \text{atms_of } DA$
using *assms*
proof (*cases rule: ord_resolve.cases*)
case (*ord_resolve n Cs D*)
note $DA = \text{this}(1)$ **and** $e = \text{this}(2)$ **and** $\text{cas.len} = \text{this}(3)$ **and** $\text{cs.len} = \text{this}(4)$ **and** $\text{cas} = \text{this}(8)$

have $\forall i < n. \text{set_mset } (Cs \ ! \ i) \subseteq \text{set_mset } (CAs \ ! \ i)$
using *cas* **by** *auto*
then have $\forall i < n. Cs \ ! \ i \subseteq \# \bigcup \# (mset \ CAs)$
by (*metis cas cas.len mset_subset_eq_add_left nth_mem_mset sum_mset.remove union_assoc*)
then have $\forall C \in \text{set } Cs. C \subseteq \# \bigcup \# (mset \ CAs)$
using *cs.len in_set_conv_nth[of _ Cs]* **by** *auto*
then have $\text{set_mset } (\bigcup \# (mset \ Cs)) \subseteq \text{set_mset } (\bigcup \# (mset \ CAs))$
by *auto (meson in_mset_sum_list2 mset_subset_eqD)*
then have $\text{atms_of } (\bigcup \# (mset \ Cs)) \subseteq \text{atms_of } (\bigcup \# (mset \ CAs))$
by (*meson lits_subseteq_imp_atms_subseteq mset_subset_eqD subsetI*)
moreover have $\text{atms_of } (\bigcup \# (mset \ CAs)) = (\bigcup CA \in \text{set } CAs. \text{atms_of } CA)$
by (*intro set_eqI iffI, simp_all,*
metis in_mset_sum_list2 atm_imp_pos_or_neg_lit neg_lit_in_atms_of pos_lit_in_atms_of,
metis in_mset_sum_list atm_imp_pos_or_neg_lit neg_lit_in_atms_of pos_lit_in_atms_of)
ultimately have $\text{atms_of } (\bigcup \# (mset \ Cs)) \subseteq (\bigcup CA \in \text{set } CAs. \text{atms_of } CA)$
by *auto*
moreover have $\text{atms_of } D \subseteq \text{atms_of } DA$
using *DA* **by** *auto*
ultimately show *?thesis*
unfolding *e* **by** *auto*
qed

11.2 Inference System

Theorem 3.16 is subsumed in the counterexample-reducing inference system framework, which is instantiated below. Unlike its unordered cousin, ordered resolution is additionally a reductive inference system.

definition $ord_Γ :: 'a$ inference set **where**

$ord_Γ = \{Infer (mset\ CAs)\ DA\ E \mid CAs\ DA\ AAs\ As\ E.\ ord_resolve\ CAs\ DA\ AAs\ As\ E\}$

sublocale $ord_Γ_sound_counterex_reducing?$:

$sound_counterex_reducing_inference_system\ ground_resolution_with_selection.\ ord_Γ\ S$

$ground_resolution_with_selection.\ INTERP\ S +$

$reductive_inference_system\ ground_resolution_with_selection.\ ord_Γ\ S$

proof $unfold_locales$

fix $DA :: 'a$ clause **and** $N :: 'a$ clause set

assume $\{\#\} \notin N$ **and** $DA \in N$ **and** $\neg INTERP\ N \models DA$ **and** $\bigwedge C. C \in N \implies \neg INTERP\ N \models C \implies DA \leq C$

then obtain $CAs\ AAs\ As\ E$ **where**

dd_sset_n : set $CAs \subseteq N$ **and**

dd_true : $INTERP\ N \models_m mset\ CAs$ **and**

res_e : $ord_resolve\ CAs\ DA\ AAs\ As\ E$ **and**

e_cex : $\neg INTERP\ N \models E$ **and**

e_lt_c : $E < DA$

using $ord_resolve_counterex_reducing[of\ N\ DA\ thesis]$ **by** $auto$

have $Infer (mset\ CAs)\ DA\ E \in ord_Γ$

using res_e **unfolding** $ord_Γ_def$ **by** $(metis\ (mono_tags,\ lifting)\ mem_Collect_eq)$

then show $\exists CC\ E.\ set_mset\ CC \subseteq N \wedge INTERP\ N \models_m CC \wedge Infer\ CC\ DA\ E \in ord_Γ$

$\wedge \neg INTERP\ N \models E \wedge E < DA$

using $dd_sset_n\ dd_true\ e_cex\ e_lt_c$ **by** $(metis\ set_mset_mset)$

qed $(auto\ simp: ord_Γ_def\ intro: ord_resolve_sound\ ord_resolve_reductive)$

lemmas $clausal_logic_compact = ord_Γ_sound_counterex_reducing.clausal_logic_compact$

end

A second proof of Theorem 3.12, compactness of clausal logic:

lemmas $clausal_logic_compact = ground_resolution_with_selection.clausal_logic_compact$

end

12 Theorem Proving Processes

theory $Proving_Process$

imports $Unordered_Ground_Resolution\ Lazy_List_Chain$

begin

This material corresponds to Section 4.1 (“Theorem Proving Processes”) of Bachmair and Ganzinger’s chapter.

The locale assumptions below capture conditions R1 to R3 of Definition 4.1. Rf denotes $\mathcal{R}_{\mathcal{F}}$; Ri denotes $\mathcal{R}_{\mathcal{I}}$.

locale $redundancy_criterion = inference_system +$

fixes

$Rf :: 'a$ clause set $\implies 'a$ clause set **and**

$Ri :: 'a$ clause set $\implies 'a$ inference set

assumes

$Ri_subset_Γ$: $Ri\ N \subseteq \Gamma$ **and**

Rf_mono : $N \subseteq N' \implies Rf\ N \subseteq Rf\ N'$ **and**

Ri_mono : $N \subseteq N' \implies Ri\ N \subseteq Ri\ N'$ **and**

Rf_indep : $N' \subseteq Rf\ N \implies Rf\ N \subseteq Rf\ (N - N')$ **and**

Ri_indep : $N' \subseteq Rf\ N \implies Ri\ N \subseteq Ri\ (N - N')$ **and**

Rf_sat : $satisfiable\ (N - Rf\ N) \implies satisfiable\ N$

begin

```

definition saturated_upto :: 'a clause set  $\Rightarrow$  bool where
  saturated_upto N  $\longleftrightarrow$  inferences_from (N - Rf N)  $\subseteq$  Ri N

inductive derive :: 'a clause set  $\Rightarrow$  'a clause set  $\Rightarrow$  bool (infix  $\triangleright$  50) where
  deduction_deletion: N - M  $\subseteq$  concls_of (inferences_from M)  $\Longrightarrow$  M - N  $\subseteq$  Rf N  $\Longrightarrow$  M  $\triangleright$  N

lemma derive_subset: M  $\triangleright$  N  $\Longrightarrow$  N  $\subseteq$  M  $\cup$  concls_of (inferences_from M)
  by (meson Diff_subset_conv derive.cases)

end

locale sat_preserving_redundancy_criterion =
  sat_preserving_inference_system  $\Gamma$  :: ('a :: wellorder) inference set + redundancy_criterion
begin

lemma deriv_sat_preserving:
  assumes
    deriv: chain ( $\triangleright$ ) Ns and
    sat_n0: satisfiable (lhd Ns)
  shows satisfiable (Sup_llist Ns)
proof -
  have ns0: lnth Ns 0 = lhd Ns
    using deriv by (metis chain_not_innull lhd_conv_lnth)
  have len_ns: llength Ns  $>$  0
    using deriv by (case_tac Ns) simp+
  {
    fix DD
    assume fin: finite DD and sset_lun: DD  $\subseteq$  Sup_llist Ns
    then obtain k where dd_sset: DD  $\subseteq$  Sup_upto_llist Ns k
      using finite_Sup_llist_imp_Sup_upto_llist by blast
    have satisfiable (Sup_upto_llist Ns k)
    proof (induct k)
      case 0
      then show ?case
        using len_ns ns0 sat_n0 unfolding Sup_upto_llist_def true_cls_def by auto
    next
    case (Suc k)
    show ?case
    proof (cases enat (Suc k)  $\geq$  llength Ns)
      case True
      then have Sup_upto_llist Ns k = Sup_upto_llist Ns (Suc k)
        unfolding Sup_upto_llist_def using le_Suc_eq not_less by blast
      then show ?thesis
        using Suc by simp
    next
    case False
    then have lnth Ns k  $\triangleright$  lnth Ns (Suc k)
      using deriv by (auto simp: chain_lnth_rel)
    then have lnth Ns (Suc k)  $\subseteq$  lnth Ns k  $\cup$  concls_of (inferences_from (lnth Ns k))
      by (rule derive_subset)
    moreover have lnth Ns k  $\subseteq$  Sup_upto_llist Ns k
      unfolding Sup_upto_llist_def using False Suc_ile_eq linear by blast
    ultimately have lnth Ns (Suc k)
       $\subseteq$  Sup_upto_llist Ns k  $\cup$  concls_of (inferences_from (Sup_upto_llist Ns k))
      by clarsimp (metis UnCI UnE image_Un inferences_from_mono le_iff_sup)
    moreover have Sup_upto_llist Ns (Suc k) = Sup_upto_llist Ns k  $\cup$  lnth Ns (Suc k)
      unfolding Sup_upto_llist_def using False by (force elim: le_SucE)
    moreover have
      satisfiable (Sup_upto_llist Ns k  $\cup$  concls_of (inferences_from (Sup_upto_llist Ns k)))
      using Suc  $\Gamma$ .sat_preserving unfolding sat_preserving_inference_system_def by simp
    ultimately show ?thesis
      by (metis le_iff_sup true_cls_union)
  }
qed

```

```

qed
then have satisfiable DD
  using dd_sset unfolding Sup_upto_llist_def by (blast intro: true_cls_mono)
}
then show ?thesis
  using ground_resolution_without_selection.clausal_logic_compact[THEN iffD1] by metis
qed

```

This corresponds to Lemma 4.2:

```

lemma
  assumes deriv: chain (▷) Ns
  shows
    Rf_Sup_subset_Rf_Liminf: Rf (Sup_llist Ns) ⊆ Rf (Liminf_llist Ns) and
    Ri_Sup_subset_Ri_Liminf: Ri (Sup_llist Ns) ⊆ Ri (Liminf_llist Ns) and
    sat_limit_iff: satisfiable (Liminf_llist Ns) ⟷ satisfiable (lhd Ns)
proof -
  {
    fix C i j
    assume
      c_in: C ∈ lnth Ns i and
      c_ni: C ∉ Rf (Sup_llist Ns) and
      j: j ≥ i and
      j': enat j < llength Ns
    from c_ni have c_ni': ∧i. enat i < llength Ns ⟹ C ∉ Rf (lnth Ns i)
      using Rf_mono lnth_subset_Sup_llist Sup_llist_def by (blast dest: contra_subsetD)
    have C ∈ lnth Ns j
    using j j'
    proof (induct j)
      case 0
      then show ?case
        using c_in by blast
      next
      case (Suc k)
      then show ?case
      proof (cases i < Suc k)
        case True
        have i ≤ k
          using True by linarith
        moreover have enat k < llength Ns
          using Suc.prem(2) Suc_ile_eq by (blast intro: dual_order.strict.implies_order)
        ultimately have c_in_k: C ∈ lnth Ns k
          using Suc.hyps by blast
        have rel: lnth Ns k ▷ lnth Ns (Suc k)
          using Suc.prem deriv by (auto simp: chain_lnth_rel)
        then show ?thesis
          using c_in_k c_ni' Suc.prem(2) by cases auto
        next
        case False
        then show ?thesis
          using Suc c_in by auto
      qed
    qed
  }
then have lu_ll: Sup_llist Ns - Rf (Sup_llist Ns) ⊆ Liminf_llist Ns
  unfolding Sup_llist_def Liminf_llist_def by blast
have rf: Rf (Sup_llist Ns - Rf (Sup_llist Ns)) ⊆ Rf (Liminf_llist Ns)
  using lu_ll Rf_mono by simp
have ri: Ri (Sup_llist Ns - Rf (Sup_llist Ns)) ⊆ Ri (Liminf_llist Ns)
  using lu_ll Ri_mono by simp
show Rf (Sup_llist Ns) ⊆ Rf (Liminf_llist Ns)
  using rf Rf_indep by blast
show Ri (Sup_llist Ns) ⊆ Ri (Liminf_llist Ns)
  using ri Ri_indep by blast

```

```

show satisfiable (Liminf_llist Ns)  $\longleftrightarrow$  satisfiable (lhd Ns)
proof
  assume satisfiable (lhd Ns)
  then have satisfiable (Sup_llist Ns)
    using deriv_deriv_sat_preserving by simp
  then show satisfiable (Liminf_llist Ns)
    using true_cls_mono[OF Liminf_llist_subset_Sup_llist] by blast
next
  assume satisfiable (Liminf_llist Ns)
  then have satisfiable (Sup_llist Ns - Rf (Sup_llist Ns))
    using true_cls_mono[OF lu_ll] by blast
  then have satisfiable (Sup_llist Ns)
    using Rf_sat by blast
  then show satisfiable (lhd Ns)
    using deriv_true_cls_mono_lhd_subset_Sup_llist_chain_not_lnull by metis
qed
qed

```

```

lemma
  assumes chain ( $\triangleright$ ) Ns
  shows
    Rf_limit_Sup: Rf (Liminf_llist Ns) = Rf (Sup_llist Ns) and
    Ri_limit_Sup: Ri (Liminf_llist Ns) = Ri (Sup_llist Ns)
  using assms
  by (auto simp: Rf_Sup_subset_Rf_Liminf Rf_mono Ri_Sup_subset_Ri_Liminf Ri_mono
    Liminf_llist_subset_Sup_llist subset_antisym)

```

end

The assumption below corresponds to condition R4 of Definition 4.1.

```

locale effective_redundancy_criterion = redundancy_criterion +
  assumes Ri_effective:  $\gamma \in \Gamma \implies \text{concl\_of } \gamma \in N \cup \text{Rf } N \implies \gamma \in \text{Ri } N$ 
begin

```

```

definition fair_cls_seq :: 'a clause set llist  $\Rightarrow$  bool where
  fair_cls_seq Ns  $\longleftrightarrow$  (let N' = Liminf_llist Ns - Rf (Liminf_llist Ns) in
    concls_of (inferences_from N' - Ri N')  $\subseteq$  Sup_llist Ns  $\cup$  Rf (Sup_llist Ns))

```

end

```

locale sat_preserving_effective_redundancy_criterion =
  sat_preserving_inference_system  $\Gamma$  :: ('a :: wellorder) inference set +
  effective_redundancy_criterion
begin

```

```

sublocale sat_preserving_redundancy_criterion
  ..

```

The result below corresponds to Theorem 4.3.

```

theorem fair_derive_saturated_upto:
  assumes
    deriv: chain ( $\triangleright$ ) Ns and
    fair: fair_cls_seq Ns
  shows saturated_upto (Liminf_llist Ns)
  unfolding saturated_upto_def
proof
  fix  $\gamma$ 
  let ?N' = Liminf_llist Ns - Rf (Liminf_llist Ns)
  assume  $\gamma$ :  $\gamma \in \text{inferences\_from } ?N'$ 
  show  $\gamma \in \text{Ri } (\text{Liminf\_llist } Ns)$ 
  proof (cases  $\gamma \in \text{Ri } ?N'$ )
    case True

```

```

then show ?thesis
  using Ri_mono by blast
next
  case False
  have concl_of (inferences_from ?N' - Ri ?N') ⊆ Sup_llist Ns ∪ Rf (Sup_llist Ns)
    using fair_unfolding fair_clsseq_def Let_def .
  then have concl_of γ ∈ Sup_llist Ns ∪ Rf (Sup_llist Ns)
    using False γ by auto
  moreover
  {
    assume concl_of γ ∈ Sup_llist Ns
    then have γ ∈ Ri (Sup_llist Ns)
      using γ Ri_effective inferences_from_def by blast
    then have γ ∈ Ri (Liminf_llist Ns)
      using deriv Ri_Sup_subset_Ri_Liminf by fast
  }
  moreover
  {
    assume concl_of γ ∈ Rf (Sup_llist Ns)
    then have concl_of γ ∈ Rf (Liminf_llist Ns)
      using deriv Rf_Sup_subset_Rf_Liminf by blast
    then have γ ∈ Ri (Liminf_llist Ns)
      using γ Ri_effective inferences_from_def by auto
  }
  ultimately show γ ∈ Ri (Liminf_llist Ns)
    by blast
  qed
qed

end

```

This corresponds to the trivial redundancy criterion defined on page 36 of Section 4.1.

```

locale trivial_redundancy_criterion = inference_system
begin

```

```

definition Rf :: 'a clause set ⇒ 'a clause set where
  Rf _ = {}

```

```

definition Ri :: 'a clause set ⇒ 'a inference set where
  Ri N = {γ. γ ∈ Γ ∧ concl_of γ ∈ N}

```

```

sublocale effective_redundancy_criterion Γ Rf Ri
  by unfold_locales (auto simp: Rf_def Ri_def)

```

```

lemma saturated_upto_iff: saturated_upto N ↔ concl_of (inferences_from N) ⊆ N
  unfolding saturated_upto_def inferences_from_def Rf_def Ri_def by auto

```

end

The following lemmas corresponds to the standard extension of a redundancy criterion defined on page 38 of Section 4.1.

```

lemma redundancy_criterion_standard_extension:
  assumes  $\Gamma \subseteq \Gamma'$  and redundancy_criterion Γ Rf Ri
  shows redundancy_criterion Γ' Rf ( $\lambda N. Ri\ N \cup (\Gamma' - \Gamma)$ )
  using assms unfolding redundancy_criterion_def by (intro conjI) ((auto simp: rev_subsetD)[5], sat)

```

```

lemma redundancy_criterion_standard_extension_saturated_upto_iff:
  assumes  $\Gamma \subseteq \Gamma'$  and redundancy_criterion Γ Rf Ri
  shows redundancy_criterion.saturated_upto Γ Rf Ri M ↔
    redundancy_criterion.saturated_upto Γ' Rf ( $\lambda N. Ri\ N \cup (\Gamma' - \Gamma)$ ) M
  using assms redundancy_criterion.saturated_upto_def redundancy_criterion.saturated_upto_def
    redundancy_criterion_standard_extension
  unfolding inference_system.inferences_from_def by blast

```

lemma *redundancy_criterion_standard_extension_effective*:
assumes $\Gamma \subseteq \Gamma'$ **and** *effective_redundancy_criterion* Γ *Rf Ri*
shows *effective_redundancy_criterion* Γ' *Rf* $(\lambda N. Ri\ N \cup (\Gamma' - \Gamma))$
using *assms_redundancy_criterion_standard_extension*[of Γ]
unfolding *effective_redundancy_criterion_def* *effective_redundancy_criterion_axioms_def* **by** *auto*

lemma *redundancy_criterion_standard_extension_fair_iff*:
assumes $\Gamma \subseteq \Gamma'$ **and** *effective_redundancy_criterion* Γ *Rf Ri*
shows *effective_redundancy_criterion_fair_clsseq* Γ' *Rf* $(\lambda N. Ri\ N \cup (\Gamma' - \Gamma))$ *Ns* \longleftrightarrow
effective_redundancy_criterion_fair_clsseq Γ *Rf Ri Ns*
using *assms_redundancy_criterion_standard_extension_effective*[of Γ Γ' *Rf Ri*]
effective_redundancy_criterion_fair_clsseq_def[of Γ *Rf Ri Ns*]
effective_redundancy_criterion_fair_clsseq_def[of Γ' *Rf* $(\lambda N. Ri\ N \cup (\Gamma' - \Gamma))$ *Ns*]
unfolding *inference_system_inferences_from_def* *Let_def* **by** *auto*

theorem *redundancy_criterion_standard_extension_fair_derive_saturated_upto*:
assumes
subs: $\Gamma \subseteq \Gamma'$ **and**
red: *redundancy_criterion* Γ *Rf Ri* **and**
red': *sat_preserving_effective_redundancy_criterion* Γ' *Rf* $(\lambda N. Ri\ N \cup (\Gamma' - \Gamma))$ **and**
deriv: *chain* (*redundancy_criterion_derive* Γ' *Rf*) *Ns* **and**
fair: *effective_redundancy_criterion_fair_clsseq* Γ' *Rf* $(\lambda N. Ri\ N \cup (\Gamma' - \Gamma))$ *Ns*
shows *redundancy_criterion_saturated_upto* Γ *Rf Ri* (*Liminf_llist* *Ns*)
proof –
have *redundancy_criterion_saturated_upto* Γ' *Rf* $(\lambda N. Ri\ N \cup (\Gamma' - \Gamma))$ (*Liminf_llist* *Ns*)
by (*rule_sat_preserving_effective_redundancy_criterion_fair_derive_saturated_upto*
[*OF red' deriv fair*])
then show *?thesis*
by (*rule_redundancy_criterion_standard_extension_saturated_upto_iff*[*THEN iffD2, OF subs red*])
qed

end

13 The Standard Redundancy Criterion

theory *Standard_Redundancy*
imports *Proving_Process*
begin

This material is based on Section 4.2.2 (“The Standard Redundancy Criterion”) of Bachmair and Ganzinger’s chapter.

locale *standard_redundancy_criterion* =
inference_system Γ **for** $\Gamma :: ('a :: wellorder)$ *inference set*
begin

abbreviation *redundant_infer* :: *'a clause set* \Rightarrow *'a inference* \Rightarrow *bool* **where**
redundant_infer $N\ \gamma \equiv$
 $\exists DD. \text{set_mset } DD \subseteq N \wedge (\forall I. I \models_m DD + \text{side_prems_of } \gamma \longrightarrow I \models \text{concl_of } \gamma)$
 $\wedge (\forall D. D \in\# DD \longrightarrow D < \text{main_prem_of } \gamma)$

definition *Rf* :: *'a clause set* \Rightarrow *'a clause set* **where**
 $Rf\ N = \{C. \exists DD. \text{set_mset } DD \subseteq N \wedge (\forall I. I \models_m DD \longrightarrow I \models C) \wedge (\forall D. D \in\# DD \longrightarrow D < C)\}$

definition *Ri* :: *'a clause set* \Rightarrow *'a inference set* **where**
 $Ri\ N = \{\gamma \in \Gamma. \text{redundant_infer } N\ \gamma\}$

lemma *tautology_redundant*:
assumes *Pos* $A \in\# C$
assumes *Neg* $A \in\# C$
shows $C \in Rf\ N$
proof –

have $set_mset \{\#\} \subseteq N \wedge (\forall I. I \models_m \{\#\} \longrightarrow I \models C) \wedge (\forall D. D \in\# \{\#\} \longrightarrow D < C)$
using *assms* **by** *auto*
then show $C \in Rf N$
unfolding *Rf_def* **by** *blast*
qed

lemma *contradiction_Rf*: $\{\#\} \in N \implies Rf N = UNIV - \{\{\#\}\}$
unfolding *Rf_def* **by** *force*

The following results correspond to Lemma 4.5. The lemma *wlog_non_Rf* generalizes the core of the argument.

lemma *Rf_mono*: $N \subseteq N' \implies Rf N \subseteq Rf N'$
unfolding *Rf_def* **by** *auto*

lemma *wlog_non_Rf*:
assumes *ex*: $\exists DD. set_mset DD \subseteq N \wedge (\forall I. I \models_m DD + CC \longrightarrow I \models E) \wedge (\forall D'. D' \in\# DD \longrightarrow D' < D)$
shows $\exists DD. set_mset DD \subseteq N - Rf N \wedge (\forall I. I \models_m DD + CC \longrightarrow I \models E) \wedge (\forall D'. D' \in\# DD \longrightarrow D' < D)$
proof –

from *ex* **obtain** *DD0* **where**

dd0: $DD0 \in \{DD. set_mset DD \subseteq N \wedge (\forall I. I \models_m DD + CC \longrightarrow I \models E) \wedge (\forall D'. D' \in\# DD \longrightarrow D' < D)\}$
by *blast*

have $\exists DD. set_mset DD \subseteq N \wedge (\forall I. I \models_m DD + CC \longrightarrow I \models E) \wedge (\forall D'. D' \in\# DD \longrightarrow D' < D) \wedge$
 $(\forall DD'. set_mset DD' \subseteq N \wedge (\forall I. I \models_m DD' + CC \longrightarrow I \models E) \wedge (\forall D'. D' \in\# DD' \longrightarrow D' < D) \longrightarrow$
 $DD \leq DD')$

using *wf_eq_minimal*[*THEN iffD1, rule_format, OF wf_less_multiset dd0*]

unfolding *not_le*[*symmetric*] **by** *blast*

then obtain *DD* **where**

dd_subs_n: $set_mset DD \subseteq N$ **and**

ddcc_imp_e: $\forall I. I \models_m DD + CC \longrightarrow I \models E$ **and**

dd_lt_d: $\forall D'. D' \in\# DD \longrightarrow D' < D$ **and**

d_min: $\forall DD'. set_mset DD' \subseteq N \wedge (\forall I. I \models_m DD' + CC \longrightarrow I \models E) \wedge (\forall D'. D' \in\# DD' \longrightarrow D' < D) \longrightarrow$
 $DD \leq DD'$

by *blast*

have $\forall Da. Da \in\# DD \longrightarrow Da \notin Rf N$

proof *clarify*

fix *Da*

assume

da_in_dd: $Da \in\# DD$ **and**

da_rf: $Da \in Rf N$

from *da_rf* **obtain** *DD'* **where**

dd'_subs_n: $set_mset DD' \subseteq N$ **and**

dd'_imp_da: $\forall I. I \models_m DD' \longrightarrow I \models Da$ **and**

dd'_lt_da: $\forall D'. D' \in\# DD' \longrightarrow D' < Da$

unfolding *Rf_def* **by** *blast*

define *DDa* **where**

$DDa = DD - \{\#Da\# \} + DD'$

have $set_mset DDa \subseteq N$

unfolding *DDa_def* **using** *dd_subs_n dd'_subs_n*

by (*meson contra_subsetD in_diffD subsetI union_iff*)

moreover have $\forall I. I \models_m DDa + CC \longrightarrow I \models E$

using *dd'_imp_da ddcc_imp_e da_in_dd* **unfolding** *DDa_def true_cls_mset_def*

by (*metis in_remove1_mset_neq union_iff*)

moreover have $\forall D'. D' \in\# DDa \longrightarrow D' < D$

using *dd_lt_d dd'_lt_da da_in_dd* **unfolding** *DDa_def*

by (*metis insert_DiffM2 order.strict_trans union_iff*)

moreover have $DDa < DD$

unfolding *DDa_def*

by (*meson da_in_dd dd'_lt_da mset_lt_single_right_iff single_subset_iff union_le_diff_plus*)

ultimately show *False*

using *d_min unfolding less_eq_multiset_def* by (*auto intro!: antisym*)
 qed
 then show *?thesis*
 using *dd_subs_n ddcc_imp_e dd_lt_d* by *auto*
 qed

lemma *Rf_imp_ex_non_Rf*:
 assumes $C \in \text{Rf } N$
 shows $\exists CC. \text{set.mset } CC \subseteq N - \text{Rf } N \wedge (\forall I. I \models_m CC \longrightarrow I \models C) \wedge (\forall C'. C' \in\# CC \longrightarrow C' < C)$
 using *assms* by (*auto simp: Rf_def intro: wlog_non_Rf[of - {#}], simplified*)

lemma *Rf_subs_Rf_diff_Rf*: $\text{Rf } N \subseteq \text{Rf } (N - \text{Rf } N)$

proof

fix C

assume $c_{rf}: C \in \text{Rf } N$

then obtain CC **where**

cc_subs: $\text{set.mset } CC \subseteq N - \text{Rf } N$ **and**

cc_imp_c: $\forall I. I \models_m CC \longrightarrow I \models C$ **and**

cc_lt_c: $\forall C'. C' \in\# CC \longrightarrow C' < C$

using *Rf_imp_ex_non_Rf* **by** *blast*

have $\forall D. D \in\# CC \longrightarrow D \notin \text{Rf } N$

using *cc_subs* **by** (*simp add: subset_iff*)

then have *cc_nr*:

$\bigwedge C DD. C \in\# CC \Longrightarrow \text{set.mset } DD \subseteq N \Longrightarrow \forall I. I \models_m DD \longrightarrow I \models C \Longrightarrow \exists D. D \in\# DD \wedge \sim D < C$

unfolding *Rf_def* **by** *auto metis*

have $\text{set.mset } CC \subseteq N$

using *cc_subs* **by** *auto*

then have $\text{set.mset } CC \subseteq$

$N - \{C. \exists DD. \text{set.mset } DD \subseteq N \wedge (\forall I. I \models_m DD \longrightarrow I \models C) \wedge (\forall D. D \in\# DD \longrightarrow D < C)\}$

using *cc_nr* **by** *auto*

then show $C \in \text{Rf } (N - \text{Rf } N)$

using *cc_imp_c cc_lt_c* **unfolding** *Rf_def* **by** *auto*

qed

lemma *Rf_eq_Rf_diff_Rf*: $\text{Rf } N = \text{Rf } (N - \text{Rf } N)$
by (*metis Diff_subset Rf_mono Rf_subs_Rf_diff_Rf subset_antisym*)

The following results correspond to Lemma 4.6.

lemma *Ri_mono*: $N \subseteq N' \Longrightarrow \text{Ri } N \subseteq \text{Ri } N'$
unfolding *Ri_def* **by** *auto*

lemma *Ri_subs_Ri_diff_Rf*: $\text{Ri } N \subseteq \text{Ri } (N - \text{Rf } N)$

proof

fix γ

assume $\gamma_{ri}: \gamma \in \text{Ri } N$

then obtain $CC D E$ **where** $\gamma: \gamma = \text{Infer } CC D E$

by (*cases* γ)

have $cc: CC = \text{side_prem}_s \text{ of } \gamma$ **and** $d: D = \text{main_prem}_o \text{ of } \gamma$ **and** $e: E = \text{concl}_o \text{ of } \gamma$

unfolding γ **by** *simp_all*

obtain DD **where**

$\text{set.mset } DD \subseteq N$ **and** $\forall I. I \models_m DD + CC \longrightarrow I \models E$ **and** $\forall C. C \in\# DD \longrightarrow C < D$

using γ_{ri} **unfolding** *Ri_def cc d e* **by** *blast*

then obtain DD' **where**

$\text{set.mset } DD' \subseteq N - \text{Rf } N$ **and** $\forall I. I \models_m DD' + CC \longrightarrow I \models E$ **and** $\forall D'. D' \in\# DD' \longrightarrow D' < D$

using *wlog_non_Rf* **by** *atomize_elim blast*

then show $\gamma \in \text{Ri } (N - \text{Rf } N)$

using γ_{ri} **unfolding** *Ri_def d cc e* **by** *blast*

qed

lemma *Ri_eq_Ri_diff_Rf*: $\text{Ri } N = \text{Ri } (N - \text{Rf } N)$
by (*metis Diff_subset Ri_mono Ri_subs_Ri_diff_Rf subset_antisym*)

lemma *Ri_subset_G*: $\text{Ri } N \subseteq \Gamma$

unfolding Ri_def **by** $blast$

lemma Rf_indep : $N' \subseteq Rf\ N \implies Rf\ N \subseteq Rf\ (N - N')$
by ($metis\ Diff_cancel\ Diff_eq_empty_iff\ Diff_mono\ Rf_eq_Rf_diff_Rf\ Rf_mono$)

lemma Ri_indep : $N' \subseteq Rf\ N \implies Ri\ N \subseteq Ri\ (N - N')$
by ($metis\ Diff_mono\ Ri_eq_Ri_diff_Rf\ Ri_mono\ order_refl$)

lemma Rf_model :
assumes $I \models_s N - Rf\ N$
shows $I \models_s N$
proof –
have $I \models_s Rf\ (N - Rf\ N)$
unfolding $true_class_def$
by ($subst\ Rf_def, simp\ add: true_cls_mset_def, metis\ assms\ subset_eq\ true_class_def$)
then have $I \models_s Rf\ N$
using $Rf_subs_Rf_diff_Rf\ true_class_mono$ **by** $blast$
then show $?thesis$
using $assms$ **by** ($metis\ Un_Diff_cancel\ true_class_union$)
qed

lemma Rf_sat : $satisfiable\ (N - Rf\ N) \implies satisfiable\ N$
by ($metis\ Rf_model$)

The following corresponds to Theorem 4.7:

sublocale $redundancy_criterion\ \Gamma\ Rf\ Ri$
by $unfold_locales\ (rule\ Ri_subset_Gamma, (elim\ Rf_mono\ Ri_mono\ Rf_indep\ Ri_indep\ Rf_sat)+)$

end

locale $standard_redundancy_criterion_reductive =$
 $standard_redundancy_criterion + reductive_inference_system$
begin

The following corresponds to Theorem 4.8:

lemma $Ri_effective$:
assumes
 $in_gamma: \gamma \in \Gamma$ **and**
 $concl_of_in_n_un_rf_n: concl_of\ \gamma \in N \cup Rf\ N$
shows $\gamma \in Ri\ N$
proof –
obtain $CC\ D\ E$ **where**
 $\gamma: \gamma = Infer\ CC\ D\ E$
by ($cases\ \gamma$)
then have $cc: CC = side_prems_of\ \gamma$ **and** $d: D = main_prem_of\ \gamma$ **and** $e: E = concl_of\ \gamma$
unfolding γ **by** $simp_all$
note $e_in_n_un_rf_n = concl_of_in_n_un_rf_n[folded\ e]$

{
assume $E \in N$
moreover have $E < D$
using $\Gamma_reductive\ e\ d\ in_gamma$ **by** $auto$
ultimately have
 $set_mset\ \{\#E\# \} \subseteq N$ **and** $\forall I. I \models_m\ \{\#E\# \} + CC \longrightarrow I \models E$ **and** $\forall D'. D' \in \# \{\#E\# \} \longrightarrow D' < D$
by $simp_all$
then have $redundant_infer\ N\ \gamma$
using $cc\ d\ e$ **by** $blast$
}
moreover
{
assume $E \in Rf\ N$
then obtain DD **where**
 $dd_sset: set_mset\ DD \subseteq N$ **and**

```

    dd_imp_e:  $\forall I. I \models DD \longrightarrow I \models E$  and
    dd_lt_e:  $\forall C'. C' \in \# DD \longrightarrow C' < E$ 
    unfolding Rf_def by blast
  from dd_lt_e have  $\forall Da. Da \in \# DD \longrightarrow Da < D$ 
    using d_e_in_γ Γ_reductive less_trans by blast
  then have redundant_infer N γ
    using dd_sset dd_imp_e cc d_e by blast
}
ultimately show  $\gamma \in Ri\ N$ 
  using in_γ e_in_n_un_rf_n unfolding Ri_def by blast
qed

sublocale effective_redundancy_criterion Γ Rf Ri
  unfolding effective_redundancy_criterion_def
  by (intro conjI redundancy_criterion_axioms, unfold_locales, rule Ri_effective)

lemma contradiction_Rf:  $\{\#\} \in N \implies Ri\ N = \Gamma$ 
  unfolding Ri_def using Γ_reductive le_multiset_empty_right
  by (force intro: exI[of -  $\{\#\#\}$ ] le_multiset_empty_left)

end

locale standard_redundancy_criterion_counterex_reducing =
  standard_redundancy_criterion + counterex_reducing_inference_system
begin

The following result corresponds to Theorem 4.9.

lemma saturated_upto_complete_if:
  assumes
    satur: saturated_upto N and
    unsat:  $\neg$  satisfiable N
  shows  $\{\#\} \in N$ 
proof (rule ccontr)
  assume ec_ni_n:  $\{\#\} \notin N$ 

  define M where
    M = N - Rf N

  have ec_ni_m:  $\{\#\} \notin M$ 
    unfolding M_def using ec_ni_n by fast

  have L_of_M  $\models_s$  M
proof (rule ccontr)
  assume  $\neg$  L_of_M  $\models_s$  M
  then obtain D where
    d_in_m:  $D \in M$  and
    d_cex:  $\neg$  L_of_M  $\models$  D and
    d_min:  $\bigwedge C. C \in M \implies C < D \implies L_of\ M \models C$ 
    using ex_min_counterex by meson
  then obtain γ CC E where
    γ:  $\gamma = Infer\ CC\ D\ E$  and
    cc_subs_m: set_mset CC  $\subseteq$  M and
    cc_true: L_of_M  $\models_m$  CC and
    γ_in:  $\gamma \in \Gamma$  and
    e_cex:  $\neg$  L_of_M  $\models$  E and
    e_lt_d:  $E < D$ 
    using Γ_counterex_reducing[OF ec_ni_m] not_less by metis
  have cc: CC = side_prem_of γ and d: D = main_prem_of γ and e: E = concl_of γ
    unfolding γ by simp_all
  have  $\gamma \in Ri\ N$ 
    by (rule set_mp[OF satur[unfolded saturated_upto_def inferences_from_def infer_from_def]])
    (simp add: γ_in d_in_m cc_subs_m cc[symmetric] d[symmetric] M_def[symmetric])
  then have  $\gamma \in Ri\ M$ 

```

```

  unfolding M_def using Ri_indep by fast
then obtain DD where
  dd_subs_m: set_mset DD  $\subseteq$  M and
  dd_cc_imp_d:  $\forall I. I \models_m DD + CC \longrightarrow I \models E$  and
  dd_lt_d:  $\forall C. C \in \# DD \longrightarrow C < D$ 
  unfolding Ri_def cc d e by blast
from dd_subs_m dd_lt_d have L_of_M  $\models_m DD$ 
  using d_min unfolding true_cls_mset_def by (metis contra_subsetD)
then have L_of_M  $\models E$ 
  using dd_cc_imp_d cc_true by auto
then show False
  using e_cex by auto
qed
then have L_of_M  $\models_s N$ 
  using M_def Rf_model by blast
then show False
  using unsat by blast
qed

```

```

theorem saturated_upto_complete:
  assumes saturated_upto N
  shows  $\neg$  satisfiable N  $\longleftrightarrow$   $\{\#\} \in N$ 
  using assms saturated_upto_complete_if_true_cls_def by auto

```

end

end

14 First-Order Ordered Resolution Calculus with Selection

theory FO_Ordered_Resolution

imports Abstract_Substitution Ordered_Ground_Resolution Standard_Redundancy

begin

This material is based on Section 4.3 (“A Simple Resolution Prover for First-Order Clauses”) of Bachmair and Ganzinger’s chapter. Specifically, it formalizes the ordered resolution calculus for first-order standard clauses presented in Figure 4 and its related lemmas and theorems, including soundness and Lemma 4.12 (the lifting lemma).

The following corresponds to pages 41–42 of Section 4.3, until Figure 5 and its explanation.

```

locale FO_resolution = mgu subst_atm id_subst comp_subst atm_of_atms renamings_apart mgu
for

```

```

  subst_atm :: 'a :: wellorder  $\Rightarrow$  's  $\Rightarrow$  'a and
  id_subst :: 's and
  comp_subst :: 's  $\Rightarrow$  's  $\Rightarrow$  's and
  renamings_apart :: 'a literal multiset list  $\Rightarrow$  's list and
  atm_of_atms :: 'a list  $\Rightarrow$  'a and
  mgu :: 'a set set  $\Rightarrow$  's option +

```

fixes

```

  less_atm :: 'a  $\Rightarrow$  'a  $\Rightarrow$  bool

```

assumes

```

  less_atm_stable: less_atm A B  $\implies$  less_atm (A  $\cdot$  a  $\sigma$ ) (B  $\cdot$  a  $\sigma$ )

```

begin

14.1 Library

```

lemma Bex_cartesian_product:  $(\exists xy \in A \times B. P xy) \equiv (\exists x \in A. \exists y \in B. P (x, y))$ 
by simp

```

```

lemma length_sorted_list_of_multiset[simp]: length (sorted_list_of_multiset A) = size A
by (metis mset_sorted_list_of_multiset size_mset)

```

lemma *eql_map_neg_lit_eql_atm*:
assumes $\text{map } (\lambda L. L \cdot l \ \eta) \ (\text{map } \text{Neg } As') = \text{map } \text{Neg } As$
shows $As' \cdot al \ \eta = As$
using *assms* **by** (*induction* As' *arbitrary*: As) *auto*

lemma *instance_list*:
assumes $\text{negs } (\text{mset } As) = SDA' \cdot \eta$
shows $\exists As'. \text{negs } (\text{mset } As') = SDA' \wedge As' \cdot al \ \eta = As$
proof –
from *assms* **have** $\text{negL}: \forall L \in \# SDA'. \text{is_neg } L$
using *Melem_subst_cls subst_lit_in_negs_is_neg* **by** *metis*

from *assms* **have** $\{\#L \cdot l \ \eta. L \in \# SDA'\#\} = \text{mset } (\text{map } \text{Neg } As)$
using *subst_cls_def* **by** *auto*
then **have** $\exists NAs'. \text{map } (\lambda L. L \cdot l \ \eta) \ NAs' = \text{map } \text{Neg } As \wedge \text{mset } NAs' = SDA'$
using *image_mset_of_subset_list*[*of* $\lambda L. L \cdot l \ \eta \ SDA' \ \text{map } \text{Neg } As$] **by** *auto*
then **obtain** As' **where** As'_p :
 $\text{map } (\lambda L. L \cdot l \ \eta) \ (\text{map } \text{Neg } As') = \text{map } \text{Neg } As \wedge \text{mset } (\text{map } \text{Neg } As') = SDA'$
by (*metis* (*no_types*, *lifting*) *Neg_atm_of_iff_negL_ex_map_conv_set_mset_mset*)

have $\text{negs } (\text{mset } As') = SDA'$
using As'_p **by** *auto*
moreover **have** $\text{map } (\lambda L. L \cdot l \ \eta) \ (\text{map } \text{Neg } As') = \text{map } \text{Neg } As$
using As'_p **by** *auto*
then **have** $As' \cdot al \ \eta = As$
using *eql_map_neg_lit_eql_atm* **by** *auto*
ultimately **show** *?thesis*
by *blast*

qed

context
fixes $S :: 'a \ \text{clause} \Rightarrow 'a \ \text{clause}$
begin

14.2 Calculus

The following corresponds to Figure 4.

definition *maximal_wrt* :: $'a \Rightarrow 'a \ \text{literal multiset} \Rightarrow \text{bool}$ **where**
 $\text{maximal_wrt } A \ C \longleftrightarrow (\forall B \in \text{atms_of } C. \neg \text{less_atm } A \ B)$

definition *strictly_maximal_wrt* :: $'a \Rightarrow 'a \ \text{literal multiset} \Rightarrow \text{bool}$ **where**
 $\text{strictly_maximal_wrt } A \ C \equiv \forall B \in \text{atms_of } C. A \neq B \wedge \neg \text{less_atm } A \ B$

lemma *strictly_maximal_wrt_maximal_wrt*: $\text{strictly_maximal_wrt } A \ C \Longrightarrow \text{maximal_wrt } A \ C$
unfolding *maximal_wrt_def* *strictly_maximal_wrt_def* **by** *auto*

inductive *eligible* :: $'s \Rightarrow 'a \ \text{list} \Rightarrow 'a \ \text{clause} \Rightarrow \text{bool}$ **where**
eligible:

$S \ DA = \text{negs } (\text{mset } As) \vee S \ DA = \{\#\} \wedge \text{length } As = 1 \wedge \text{maximal_wrt } (As \ ! \ 0 \cdot a \ \sigma) \ (DA \cdot \sigma) \Longrightarrow$
eligible $\sigma \ As \ DA$

inductive

ord_resolve

:: $'a \ \text{clause list} \Rightarrow 'a \ \text{clause} \Rightarrow 'a \ \text{multiset list} \Rightarrow 'a \ \text{list} \Rightarrow 's \Rightarrow 'a \ \text{clause} \Rightarrow \text{bool}$

where

ord_resolve:

$\text{length } CAs = n \Longrightarrow$
 $\text{length } Cs = n \Longrightarrow$
 $\text{length } AAs = n \Longrightarrow$
 $\text{length } As = n \Longrightarrow$

$n \neq 0 \implies$
 $(\forall i < n. CAs ! i = Cs ! i + poss (AAs ! i)) \implies$
 $(\forall i < n. AAs ! i \neq \{\#\}) \implies$
 $Some \sigma = mgu (set_mset 'set (map2 add_mset As AAs)) \implies$
 $eligible \sigma As (D + negs (mset As)) \implies$
 $(\forall i < n. strictly_maximal_wrt (As ! i \cdot a \sigma) (Cs ! i \cdot \sigma)) \implies$
 $(\forall i < n. S (CAs ! i) = \{\#\}) \implies$
 $ord_resolve CAs (D + negs (mset As)) AAs As \sigma ((\bigcup \# (mset Cs) + D) \cdot \sigma)$

inductive

$ord_resolve_rename$
 $:: 'a \text{ clause list} \Rightarrow 'a \text{ clause} \Rightarrow 'a \text{ multiset list} \Rightarrow 'a \text{ list} \Rightarrow 's \Rightarrow 'a \text{ clause} \Rightarrow bool$

where

$ord_resolve_rename:$
 $length CAs = n \implies$
 $length AAs = n \implies$
 $length As = n \implies$
 $(\forall i < n. poss (AAs ! i) \subseteq \# CAs ! i) \implies$
 $negs (mset As) \subseteq \# DA \implies$
 $\varrho = hd (renamings_apart (DA \# CAs)) \implies$
 $\varrho s = tl (renamings_apart (DA \# CAs)) \implies$
 $ord_resolve (CAs \cdot cl \varrho s) (DA \cdot \varrho) (AAs \cdot aml \varrho s) (As \cdot al \varrho) \sigma E \implies$
 $ord_resolve_rename CAs DA AAs As \sigma E$

lemma $ord_resolve_empty_main_prem: \neg ord_resolve Cs \{\#\} AAs As \sigma E$
by ($simp$ add: $ord_resolve.simps$)

lemma $ord_resolve_rename_empty_main_prem: \neg ord_resolve_rename Cs \{\#\} AAs As \sigma E$
by ($simp$ add: $ord_resolve_empty_main_prem$ $ord_resolve_rename.simps$)

14.3 Soundness

Soundness is not discussed in the chapter, but it is an important property.

lemma $ord_resolve_ground_inst_sound:$

assumes

$res_e: ord_resolve CAs DA AAs As \sigma E$ **and**
 $cc_inst_true: I \models m \text{ mset } CAs \cdot cm \sigma \cdot cm \eta$ **and**
 $d_inst_true: I \models DA \cdot \sigma \cdot \eta$ **and**
 $ground_subst_eta: is_ground_subst \eta$

shows $I \models E \cdot \eta$

using res_e

proof ($cases$ rule: $ord_resolve.cases$)

case ($ord_resolve n Cs D$)

note $da = this(1)$ **and** $e = this(2)$ **and** $cas_len = this(3)$ **and** $cs_len = this(4)$ **and**
 $aas_len = this(5)$ **and** $as_len = this(6)$ **and** $cas = this(8)$ **and** $mgu = this(10)$ **and**
 $len = this(1)$

have $len: length CAs = length As$

using as_len cas_len **by** $auto$

have $is_ground_subst (\sigma \odot \eta)$

using $ground_subst_eta$ **by** ($rule$ $is_ground_comp_subst$)

then have $cc_true: I \models m \text{ mset } CAs \cdot cm \sigma \cdot cm \eta$ **and** $d_true: I \models DA \cdot \sigma \cdot \eta$

using cc_inst_true d_inst_true **by** $auto$

from mgu **have** $unif: \forall i < n. \forall A \in \# AAs ! i. A \cdot a \sigma = As ! i \cdot a \sigma$

using $mgu_unifier$ as_len aas_len **by** $blast$

show $I \models E \cdot \eta$

proof ($cases \forall A \in set As. A \cdot a \sigma \cdot a \eta \in I$)

case $True$

then have $\neg I \models negs (mset As) \cdot \sigma \cdot \eta$

unfolding $true_cls_def[of I]$ **by** $auto$

then have $I \models D \cdot \sigma \cdot \eta$

```

    using d_true da by auto
  then show ?thesis
    unfolding e by auto
next
case False
then obtain i where a_in_aa: i < length CAs and a_false: (As ! i) · a σ · a η ∉ I
  using da len by (metis in_set_conv_nth)
define C where C ≡ Cs ! i
define BB where BB ≡ AAs ! i
have c_cf': C ⊆# ∪# (mset CAs)
  unfolding C_def using a_in_aa cas cas_len
  by (metis less_subset_eq_Union_mset mset_subset_eq_add_left subset_mset.order.trans)
have c_in_cc: C + poss BB ∈# mset CAs
  using C_def BB_def a_in_aa cas_len in_set_conv_nth cas by fastforce
{
  fix B
  assume B ∈# BB
  then have B · a σ = (As ! i) · a σ
    using unif a_in_aa cas_len unfolding BB_def by auto
}
then have ¬ I ⊨ poss BB · σ · η
  using a_false by (auto simp: true_cls_def)
moreover have I ⊨ (C + poss BB) · σ · η
  using c_in_cc cc_true true_cls_mset_true_cls[of I mset CAs · cm σ · cm η] by force
ultimately have I ⊨ C · σ · η
  by simp
then show ?thesis
  unfolding e subst_cls_union using c_cf' C_def a_in_aa cas_len cs_len
  by (metis (no_types, lifting) mset_subset_eq_add_left nth_mem_mset set_mset_mono sum_mset.remove true_cls_mono
subst_cls_mono)
qed
qed

```

The previous lemma is not only used to prove soundness, but also the following lemma which is used to prove Lemma 4.10.

lemma *ord_resolve_rename_ground_inst_sound*:

```

assumes
  ord_resolve_rename CAs DA AAs As σ E and
  qs = tl (renamings_apart (DA # CAs)) and
  q = hd (renamings_apart (DA # CAs)) and
  I ⊨m (mset (CAs · cl qs)) · cm σ · cm η and
  I ⊨ DA · q · σ · η and
  is_ground_subst η
shows I ⊨ E · η
using assms by (cases rule: ord_resolve_rename.cases) (fast intro: ord_resolve_ground_inst_sound)

```

Here follows the soundness theorem for the resolution rule.

theorem *ord_resolve_sound*:

```

assumes
  res_e: ord_resolve CAs DA AAs As σ E and
  cc_d_true: ∧σ. is_ground_subst σ ⇒ I ⊨m (mset CAs + {#DA#}) · cm σ and
  ground_subst_η: is_ground_subst η
shows I ⊨ E · η
proof (use res_e in (cases rule: ord_resolve.cases))
  case (ord_resolve n Cs D)
  note da = this(1) and e = this(2) and cas_len = this(3) and cs_len = this(4)
  and aas_len = this(5) and as_len = this(6) and cas = this(8) and mgu = this(10)
  have ground_subst_σ_η: is_ground_subst (σ ∘ η)
    using ground_subst_η by (rule is_ground_comp_subst)
  have cas_true: I ⊨m mset CAs · cm σ · cm η
    using cc_d_true ground_subst_σ_η by fastforce
  have da_true: I ⊨ DA · σ · η
    using cc_d_true ground_subst_σ_η by fastforce

```



```

show  $I \models E \cdot \eta$ 
  using ord_resolve_ground_inst_sound[OF res_e cas_true da_true] ground_subst_η by auto
qed

```

```

lemma subst_sound:
  assumes
     $\bigwedge \sigma. \text{is\_ground\_subst } \sigma \implies I \models (C \cdot \sigma)$  and
    is_ground_subst η
  shows  $I \models (C \cdot \varrho) \cdot \eta$ 
  using assms is_ground_comp_subst subst_cls_comp_subst by metis

```

```

lemma subst_sound_scl:
  assumes
    len: length P = length CAs and
    true_cas:  $\bigwedge \sigma. \text{is\_ground\_subst } \sigma \implies I \models_m (\text{mset } CAs) \cdot \text{cm } \sigma$  and
    ground_subst_η: is_ground_subst η
  shows  $I \models_m \text{mset } (CAs \cdot\!\cdot\! cl P) \cdot \text{cm } \eta$ 
proof -
  from true_cas have  $\bigwedge CA. CA \in \# \text{mset } CAs \implies (\bigwedge \sigma. \text{is\_ground\_subst } \sigma \implies I \models CA \cdot \sigma)$ 
  unfolding true_cls_mset_def by force
  then have  $\forall i < \text{length } CAs. \forall \sigma. \text{is\_ground\_subst } \sigma \longrightarrow (I \models CAs ! i \cdot \sigma)$ 
  using in_set_conv_nth by auto
  then have true_cp:  $\forall i < \text{length } CAs. \forall \sigma. \text{is\_ground\_subst } \sigma \longrightarrow I \models CAs ! i \cdot P ! i \cdot \sigma$ 
  using subst_sound len by auto

```

```

{
  fix CA
  assume  $CA \in \# \text{mset } (CAs \cdot\!\cdot\! cl P)$ 
  then obtain i where
    i.x: i < length (CAs ·· cl P) CA = (CAs ·· cl P) ! i
  by (metis in_mset_conv_nth)
  then have  $\forall \sigma. \text{is\_ground\_subst } \sigma \longrightarrow I \models CA \cdot \sigma$ 
  using true_cp unfolding subst_cls_lists_def by (simp add: len)
}
then show ?thesis
  using assms unfolding true_cls_mset_def by auto
qed

```

Here follows the soundness theorem for the resolution rule with renaming.

```

lemma ord_resolve_rename_sound:
  assumes
    res_e: ord_resolve_rename CAs DA AAs As σ E and
    cc_d_true:  $\bigwedge \sigma. \text{is\_ground\_subst } \sigma \implies I \models_m ((\text{mset } CAs) + \{\#DA\}) \cdot \text{cm } \sigma$  and
    ground_subst_η: is_ground_subst η
  shows  $I \models E \cdot \eta$ 
  using res_e
proof (cases rule: ord_resolve_rename.cases)
  case (ord_resolve_rename n ρ qs)
  note qs = this(7) and res = this(8)
  have len: length qs = length CAs
  using qs renamings_apart_length by auto
  have  $\bigwedge \sigma. \text{is\_ground\_subst } \sigma \implies I \models_m (\text{mset } (CAs \cdot\!\cdot\! cl qs) + \{\#DA \cdot \varrho\}) \cdot \text{cm } \sigma$ 
  using subst_sound_scl[OF len, of I] subst_sound cc_d_true by auto
  then show  $I \models E \cdot \eta$ 
  using ground_subst_η ord_resolve_sound[OF res] by simp
qed

```

14.4 Other Basic Properties

```

lemma ord_resolve_unique:
  assumes
    ord_resolve CAs DA AAs As σ E and
    ord_resolve CAs DA AAs As σ' E'
  shows  $\sigma = \sigma' \wedge E = E'$ 

```

```

using assms
proof (cases rule: ord_resolve.cases[case_product ord_resolve.cases], intro conjI)
case (ord_resolve_ord_resolve CAs n Cs AAs As  $\sigma''$  DA CAs' n' Cs' AAs' As'  $\sigma'''$  DA')
note res = this(1-17) and res' = this(18-34)

show  $\sigma = \sigma'$ 
  using res(3-5,14) res'(3-5,14) by (metis option.inject)

have  $Cs = Cs'$ 
  using res(1,3,7,8,12) res'(1,3,7,8,12) by (metis add_right_imp_eq nth_equalityI)
moreover have  $DA = DA'$ 
  using res(2,4) res'(2,4) by fastforce
ultimately show  $E = E'$ 
  using res(5,6) res'(5,6)  $\sigma$  by blast
qed

```

```

lemma ord_resolve_rename_unique:
assumes
  ord_resolve_rename CAs DA AAs As  $\sigma$  E and
  ord_resolve_rename CAs DA AAs As  $\sigma'$  E'
shows  $\sigma = \sigma' \wedge E = E'$ 
using assms unfolding ord_resolve_rename.simps using ord_resolve_unique by meson

```

```

lemma ord_resolve_max_side_premis: ord_resolve CAs DA AAs As  $\sigma$  E  $\implies$  length CAs  $\leq$  size DA
by (auto elim!: ord_resolve.cases)

```

```

lemma ord_resolve_rename_max_side_premis:
  ord_resolve_rename CAs DA AAs As  $\sigma$  E  $\implies$  length CAs  $\leq$  size DA
by (elim ord_resolve_rename.cases, drule ord_resolve_max_side_premis, simp add: renamings_apart_length)

```

14.5 Inference System

```

definition ord_FO $\Gamma$  :: 'a inference set where
  ord_FO $\Gamma$  = {Infer (mset CAs) DA E | CAs DA AAs As  $\sigma$  E. ord_resolve_rename CAs DA AAs As  $\sigma$  E}

```

```

interpretation ord_FO_resolution: inference_system ord_FO $\Gamma$  .

```

```

lemma exists_compose:  $\exists x. P (f x) \implies \exists y. P y$ 
by meson

```

```

lemma finite_ord_FO_resolution_inferences_between:
assumes fin_cc: finite CC
shows finite (ord_FO_resolution.inferences_between CC C)

```

```

proof -
let ?CCC = CC  $\cup$  {C}

```

```

define all_AA where all_AA = ( $\bigcup D \in ?CCC. \text{atms\_of } D$ )
define max_ary where max_ary = Max (size ' ?CCC)
define CAS where CAS = {CAs. CAs  $\in$  lists ?CCC  $\wedge$  length CAs  $\leq$  max_ary}
define AS where AS = {As. As  $\in$  lists all_AA  $\wedge$  length As  $\leq$  max_ary}
define AAS where AAS = {AAs. AAs  $\in$  lists (mset ' AS)  $\wedge$  length AAs  $\leq$  max_ary}

```

```

note defs = all_AA_def max_ary_def CAS_def AS_def AAS_def

```

```

let ?infer_of =
   $\lambda CAs DA AAs As. \text{Infer (mset CAs) DA (THE E. } \exists \sigma. \text{ord\_resolve\_rename CAs DA AAs As } \sigma E)$ 

```

```

let ?Z = { $\gamma$  | CAs DA AAs As  $\sigma$  E  $\gamma$ .  $\gamma = \text{Infer (mset CAs) DA E}$ 
   $\wedge \text{ord\_resolve\_rename CAs DA AAs As } \sigma E \wedge \text{infer\_from ?CCC } \gamma \wedge C \in \# \text{prems\_of } \gamma$ }
let ?Y = {Infer (mset CAs) DA E | CAs DA AAs As  $\sigma$  E.
  ord_resolve_rename CAs DA AAs As  $\sigma$  E  $\wedge$  set CAs  $\cup$  {DA}  $\subseteq$  ?CCC}
let ?X = {?infer_of CAs DA AAs As | CAs DA AAs As. CAs  $\in$  CAS  $\wedge$  DA  $\in$  ?CCC  $\wedge$  AAs  $\in$  AAS  $\wedge$  As  $\in$  AS}
let ?W = CAS  $\times$  ?CCC  $\times$  AAS  $\times$  AS

```

```

have fin_w: finite ?W
  unfolding defs using fin_cc by (simp add: finite_lists_length_le lists_eq_set)

have ?Z ⊆ ?Y
  by (force simp: infer_from_def)
also have ... ⊆ ?X
proof -
{
  fix CAs DA AAs As σ E
  assume
    res_e: ord_resolve_rename CAs DA AAs As σ E and
    da_in: DA ∈ ?CCC and
    cas_sub: set CAs ⊆ ?CCC

  have E = (THE E. ∃σ. ord_resolve_rename CAs DA AAs As σ E)
    ∧ CAs ∈ CAS ∧ AAs ∈ AAS ∧ As ∈ AS (is ?e ∧ ?cas ∧ ?aas ∧ ?as)
  proof (intro conjI)
    show ?e
      using res_e ord_resolve_rename_unique by (blast intro: the_equality[symmetric])
  next
    show ?cas
      unfolding CAS_def max_ary_def using cas_sub
        ord_resolve_rename_max_side_premis[OF res_e] da_in fin_cc
      by (auto simp add: Max_ge_iff)
  next
    show ?aas
      using res_e
  proof (cases rule: ord_resolve_rename.cases)
    case (ord_resolve_rename n ρ ρs)
    note len_cas = this(1) and len_aas = this(2) and len_as = this(3) and
      aas_sub = this(4) and as_sub = this(5) and res_e' = this(8)

    show ?thesis
      unfolding AAS_def
    proof (clarify, intro conjI)
      show AAs ∈ lists (mset ' AS)
        unfolding AS_def image_def
      proof clarsimp
        fix AA
        assume AA ∈ set AAs
        then obtain i where
          i_lt: i < n and
          aa: AA = AAs ! i
          by (metis in_set_conv_nth len_aas)

        have casi_in: CAs ! i ∈ ?CCC
          using i_lt len_cas cas_sub nth_mem by blast

        have pos_aa_sub: poss AA ⊆# CAs ! i
          using aa aas_sub i_lt by blast
        then have set_mset AA ⊆ atms_of (CAs ! i)
          by (metis atms_of_poss lits_subseteq_imp_atms_subseteq set_mset_mono)
        also have aa_sub: ... ⊆ all_AA
          unfolding all_AA_def using casi_in by force
        finally have aa_sub: set_mset AA ⊆ all_AA
          .

        have size AA = size (poss AA)
          by simp
        also have ... ≤ size (CAs ! i)
          by (rule size_mset_mono[OF pos_aa_sub])
        also have ... ≤ max_ary
          unfolding max_ary_def using fin_cc casi_in by auto

```

```

finally have sz_aa: size AA ≤ max_ary
  .

let ?As' = sorted_list_of_multiset AA

have ?As' ∈ lists all_AA
  using aa_sub by auto
moreover have length ?As' ≤ max_ary
  using sz_aa by simp
moreover have AA = mset ?As'
  by simp
ultimately show ∃ xa. xa ∈ lists all_AA ∧ length xa ≤ max_ary ∧ AA = mset xa
  by blast
qed
next
have length AAs = length As
  unfolding len_aas len_as ..
also have ... ≤ size DA
  using as_sub size_mset_mono by fastforce
also have ... ≤ max_ary
  unfolding max_ary_def using fin_cc da_in by auto
finally show length AAs ≤ max_ary
  .
qed
qed
next
show ?as
  unfolding AS_def
proof (clarify, intro conjI)
  have set As ⊆ atms_of DA
  using res_e[simplified ord_resolve_rename.simps]
  by (metis atms_of_negs lits_subseteq_imp_atms_subseteq set_mset_mono set_mset_mset)
also have ... ⊆ all_AA
  unfolding all_AA_def using da_in by blast
finally show As ∈ lists all_AA
  unfolding lists_eq_set by simp
next
have length As ≤ size DA
  using res_e[simplified ord_resolve_rename.simps]
  ord_resolve_rename_max_side_prem[OF res_e] by auto
also have size DA ≤ max_ary
  unfolding max_ary_def using fin_cc da_in by auto
finally show length As ≤ max_ary
  .
qed
qed
}
then show ?thesis
  by simp fast
qed
also have ... ⊆ (λ(CAs, DA, AAs, As). ?infer_of CAs DA AAs As) ' ?W
  unfolding image_def Bex_cartesian_product by fast
finally show ?thesis
  unfolding inference_system.infernces_between_def ord_FO_Γ_def mem_Collect_eq
  by (fast intro: rev_finite_subset[OF finite_imageI[OF fin_w]])
qed

lemma ord_FO_resolution_infernces_between_empty_empty:
  ord_FO_resolution.infernces_between {} {#} = {}
  unfolding ord_FO_resolution.infernces_between_def inference_system.infernces_between_def
  infer_from_def ord_FO_Γ_def
  using ord_resolve_rename_empty_main_prem by auto

```

14.6 Lifting

The following corresponds to the passage between Lemmas 4.11 and 4.12.

context

fixes $M :: 'a$ clause set

assumes $select$: selection S

begin

interpretation $selection$

by ($rule\ select$)

definition $S_M :: 'a$ literal multiset $\Rightarrow 'a$ literal multiset **where**

$S_M\ C =$

(if $C \in grounding_of_clss\ M$ then

(SOME C' . $\exists D\ \sigma.$ $D \in M \wedge C = D \cdot \sigma \wedge C' = S\ D \cdot \sigma \wedge is_ground_subst\ \sigma$)

else

$S\ C$)

lemma $S_M_grounding_of_clss$:

assumes $C \in grounding_of_clss\ M$

obtains $D\ \sigma$ **where**

$D \in M \wedge C = D \cdot \sigma \wedge S_M\ C = S\ D \cdot \sigma \wedge is_ground_subst\ \sigma$

proof ($atomize_elim$, $unfold\ S_M_def\ eqTrueI[OF\ assms]$ if_True , $rule\ someI_ex$)

from $assms$ **show** $\exists C'\ D\ \sigma.$ $D \in M \wedge C = D \cdot \sigma \wedge C' = S\ D \cdot \sigma \wedge is_ground_subst\ \sigma$

by ($auto\ simp$: $grounding_of_clss_def\ grounding_of_cls_def$)

qed

lemma $S_M_not_grounding_of_clss$: $C \notin grounding_of_clss\ M \Longrightarrow S_M\ C = S\ C$

unfolding S_M_def **by** $simp$

lemma $S_M_selects_subsetq$: $S_M\ C \subseteq\# C$

by ($metis\ S_M_grounding_of_clss\ S_M_not_grounding_of_clss\ S_selects_subsetq\ subst_cls_mono_mset$)

lemma $S_M_selects_neg_lits$: $L \in\# S_M\ C \Longrightarrow is_neg\ L$

by ($metis\ Melem_subst_cls\ S_M_grounding_of_clss\ S_M_not_grounding_of_clss\ S_selects_neg_lits\ subst_lit_is_neg$)

end

end

The following corresponds to Lemma 4.12:

lemma $map2_add_mset_map$:

assumes $length\ AAs' = n$ **and** $length\ As' = n$

shows $map2\ add_mset\ (As' \cdot al\ \eta)\ (AAs' \cdot aml\ \eta) = map2\ add_mset\ As'\ AAs' \cdot aml\ \eta$

using $assms$

proof ($induction\ n\ arbitrary$: $AAs'\ As'$)

case ($Suc\ n$)

then have $map2\ add_mset\ (tl\ (As' \cdot al\ \eta))\ (tl\ (AAs' \cdot aml\ \eta)) = map2\ add_mset\ (tl\ As')\ (tl\ AAs') \cdot aml\ \eta$

by $simp$

moreover

have $Succ$: $length\ (As' \cdot al\ \eta) = Suc\ n$ $length\ (AAs' \cdot aml\ \eta) = Suc\ n$

using $Suc(3)\ Suc(2)$ **by** $auto$

then have $length\ (tl\ (As' \cdot al\ \eta)) = n$ $length\ (tl\ (AAs' \cdot aml\ \eta)) = n$

by $auto$

then have $length\ (map2\ add_mset\ (tl\ (As' \cdot al\ \eta))\ (tl\ (AAs' \cdot aml\ \eta))) = n$

$length\ (map2\ add_mset\ (tl\ As')\ (tl\ AAs') \cdot aml\ \eta) = n$

using $Suc(2,3)$ **by** $auto$

ultimately have $\forall i < n.$ $tl\ (map2\ add_mset\ ((As' \cdot al\ \eta))\ ((AAs' \cdot aml\ \eta))) ! i =$

$tl\ (map2\ add_mset\ (As')\ (AAs') \cdot aml\ \eta) ! i$

using $Suc(2,3)\ Succ$ **by** ($simp\ add$: $map2_tl\ map_tl\ subst_atm_mset_list_def\ del$: $subst_atm_list_tl$)

moreover have nn : $length\ (map2\ add_mset\ ((As' \cdot al\ \eta))\ ((AAs' \cdot aml\ \eta))) = Suc\ n$

$length\ (map2\ add_mset\ (As')\ (AAs') \cdot aml\ \eta) = Suc\ n$

using *Succ Suc* **by** *auto*
ultimately have $\forall i. i < \text{Suc } n \longrightarrow i > 0 \longrightarrow$
 $\text{map2 add_mset } (As' \cdot al \ \eta) \ (AAs' \cdot aml \ \eta) \ ! \ i = (\text{map2 add_mset } As' \ AAs' \cdot aml \ \eta) \ ! \ i$
by (*auto simp: subst_atm_mset_list_def gr0_conv_Suc subst_atm_mset_def*)
moreover have $\text{add_mset } (hd \ As' \cdot a \ \eta) \ (hd \ AAs' \cdot am \ \eta) = \text{add_mset } (hd \ As') \ (hd \ AAs') \cdot am \ \eta$
unfolding *subst_atm_mset_def* **by** *auto*
then have $(\text{map2 add_mset } (As' \cdot al \ \eta) \ (AAs' \cdot aml \ \eta)) \ ! \ 0 = (\text{map2 add_mset } (As') \ (AAs') \cdot aml \ \eta) \ ! \ 0$
using *Suc* **by** (*simp add: Succ(2) subst_atm_mset_def*)
ultimately have $\forall i < \text{Suc } n. (\text{map2 add_mset } (As' \cdot al \ \eta) \ (AAs' \cdot aml \ \eta)) \ ! \ i =$
 $(\text{map2 add_mset } (As') \ (AAs') \cdot aml \ \eta) \ ! \ i$
using *Suc* **by** *auto*
then show *?case*
using *nn list_eq_iff_nth_eq* **by** *metis*
qed *auto*

lemma *maximal_wrt_subst*: $\text{maximal_wrt } (A \cdot a \ \sigma) \ (C \cdot \sigma) \Longrightarrow \text{maximal_wrt } A \ C$
unfolding *maximal_wrt_def* **using** *in_atms_of_subst less_atm_stable* **by** *blast*

lemma *strictly_maximal_wrt_subst*: $\text{strictly_maximal_wrt } (A \cdot a \ \sigma) \ (C \cdot \sigma) \Longrightarrow \text{strictly_maximal_wrt } A \ C$
unfolding *strictly_maximal_wrt_def* **using** *in_atms_of_subst less_atm_stable* **by** *blast*

lemma *ground_resolvent_subset*:

assumes
 $gr_cas: \text{is_ground_cls_list } CAs$ **and**
 $gr_da: \text{is_ground_cls } DA$ **and**
 $res_e: \text{ord_resolve } S \ CAs \ DA \ AAs \ As \ \sigma \ E$
shows $E \subseteq \# \bigcup \# (mset \ CAs) + DA$
using *res_e*
proof (*cases rule: ord_resolve.cases*)
case (*ord_resolve n Cs D*)
note $da = \text{this}(1)$ **and** $e = \text{this}(2)$ **and** $cas_len = \text{this}(3)$ **and** $cs_len = \text{this}(4)$
and $aas_len = \text{this}(5)$ **and** $as_len = \text{this}(6)$ **and** $cas = \text{this}(8)$ **and** $mgu = \text{this}(10)$
then have $cs_sub_cas: \bigcup \# (mset \ Cs) \subseteq \# \bigcup \# (mset \ CAs)$
using *subteq_list_Union_mset cas_len cs_len* **by** *force*
then have $cs_sub_cas: \bigcup \# (mset \ Cs) \subseteq \# \bigcup \# (mset \ CAs)$
using *subteq_list_Union_mset cas_len cs_len* **by** *force*
then have $gr_cs: \text{is_ground_cls_list } Cs$
using *gr_cas* **by** *simp*
have $d_sub_da: D \subseteq \# DA$
by (*simp add: da*)
then have $gr_d: \text{is_ground_cls } D$
using *gr_da is_ground_cls_mono* **by** *auto*

have $\text{is_ground_cls } (\bigcup \# (mset \ Cs) + D)$
using *gr_cs gr_d* **by** *auto*
with e **have** $E = \bigcup \# (mset \ Cs) + D$
by *auto*
then show *?thesis*
using *cs_sub_cas d_sub_da* **by** (*auto simp: subset_mset.add_mono*)
qed

lemma *ord_resolve_obtain_clauses*:

assumes
 $res_e: \text{ord_resolve } (S_M \ S \ M) \ CAs \ DA \ AAs \ As \ \sigma \ E$ **and**
 $select: \text{selection } S$ **and**
 $grounding: \{DA\} \cup \text{set } CAs \subseteq \text{grounding_of_class } M$ **and**
 $n: \text{length } CAs = n$ **and**
 $d: DA = D + \text{negs } (mset \ As)$ **and**
 $c: (\forall i < n. CAs \ ! \ i = Cs \ ! \ i + \text{poss } (AAs \ ! \ i)) \ \text{length } Cs = n \ \text{length } AAs = n$
obtains $DA0 \ \eta0 \ CAs0 \ \eta s0 \ As0 \ AAs0 \ D0 \ Cs0$ **where**
 $\text{length } CAs0 = n$
 $\text{length } \eta s0 = n$
 $DA0 \in M$

```

DA0 · η0 = DA
S DA0 · η0 = S_M S M DA
∀ CA0 ∈ set CAs0. CA0 ∈ M
CAs0 ..cl ηs0 = CAs
map S CAs0 ..cl ηs0 = map (S_M S M) CAs
is_ground_subst η0
is_ground_subst_list ηs0
As0 ..al η0 = As
AAs0 ..aml ηs0 = AAs
length As0 = n
D0 · η0 = D
DA0 = D0 + (negs (mset As0))
S_M S M (D + negs (mset As)) ≠ {#} ⇒ negs (mset As0) = S DA0
length Cs0 = n
Cs0 ..cl ηs0 = Cs
∀ i < n. CAs0 ! i = Cs0 ! i + poss (AAs0 ! i)
length AAs0 = n
using res_e
proof (cases rule: ord_resolve.cases)
case (ord_resolve n_twin Cs_twins D_twin)
note da = this(1) and e = this(2) and cas = this(8) and mgu = this(10) and eligible = this(11)
from ord_resolve have n_twin = n D_twin = D
  using n d by auto
moreover have Cs_twins = Cs
  using c cas n calculation(1) (length Cs_twins = n_twin) by (auto simp add: nth_equalityI)
ultimately
have nz: n ≠ 0 and cs_len: length Cs = n and aas_len: length AAs = n and as_len: length As = n
  and da: DA = D + negs (mset As) and eligible: eligible (S_M S M) σ As (D + negs (mset As))
  and cas: ∀ i < n. CAs ! i = Cs ! i + poss (AAs ! i)
  using ord_resolve by force+

note n = ⟨n ≠ 0⟩ ⟨length CAs = n⟩ ⟨length Cs = n⟩ ⟨length AAs = n⟩ ⟨length As = n⟩

interpret S: selection S by (rule select)

— Obtain FO side premises
have ∀ CA ∈ set CAs. ∃ CA0 ηc0. CA0 ∈ M ∧ CA0 · ηc0 = CA ∧ S CA0 · ηc0 = S_M S M CA ∧ is_ground_subst
ηc0
  using grounding S_M_grounding_of_cls select by (metis (no_types) le_supE subset_iff)
  then have ∀ i < n. ∃ CA0 ηc0. CA0 ∈ M ∧ CA0 · ηc0 = (CAs ! i) ∧ S CA0 · ηc0 = S_M S M (CAs ! i) ∧
is_ground_subst ηc0
  using n by force
  then obtain ηs0f CAs0f where f-p:
    ∀ i < n. CAs0f i ∈ M
    ∀ i < n. (CAs0f i) · (ηs0f i) = (CAs ! i)
    ∀ i < n. S (CAs0f i) · (ηs0f i) = S_M S M (CAs ! i)
    ∀ i < n. is_ground_subst (ηs0f i)
  using n by (metis (no_types))

define ηs0 where
  ηs0 = map ηs0f [0 ..<n]
define CAs0 where
  CAs0 = map CAs0f [0 ..<n]

have length ηs0 = n length CAs0 = n
  unfolding ηs0_def CAs0_def by auto
note n = ⟨length ηs0 = n⟩ ⟨length CAs0 = n⟩ n

— The properties we need of the FO side premises
have CAs0.in_M: ∀ CA0 ∈ set CAs0. CA0 ∈ M
  unfolding CAs0_def using f-p(1) by auto
have CAs0.to_CAs: CAs0 ..cl ηs0 = CAs
  unfolding CAs0_def ηs0_def using f-p(2) by (auto simp: n intro: nth_equalityI)

```

```

have SCAs0_to_SMCAs: (map S CAs0) ..cl ηs0 = map (S_M S M) CAs
  unfolding CAs0_def ηs0_def using f.p(β) n by (force intro: nth_equalityI)
have sub_ground: ∀ ηc0 ∈ set ηs0. is_ground_subst ηc0
  unfolding ηs0_def using f.p n by force
then have is_ground_subst_list ηs0
  using n unfolding is_ground_subst_list_def by auto

```

— Split side premises CAs0 into Cs0 and AAs0

```

obtain AAs0 Cs0 where AAs0_Cs0_p:
  AAs0 ..aml ηs0 = AAs length Cs0 = n Cs0 ..cl ηs0 = Cs
  ∀ i < n. CAs0 ! i = Cs0 ! i + poss (AAs0 ! i) length AAs0 = n
proof —
  have ∀ i < n. ∃ AA0. AA0 ·am ηs0 ! i = AAs ! i ∧ poss AA0 ⊆# CAs0 ! i
  proof (rule, rule)
    fix i
    assume i < n
    have CAs0 ! i · ηs0 ! i = CAs ! i
      using (i < n) ⟨CAs0 ..cl ηs0 = CAs⟩ n by force
    moreover have poss (AAs ! i) ⊆# CAs ! i
      using (i < n) cas by auto
    ultimately obtain poss_AA0 where
      nn: poss_AA0 · ηs0 ! i = poss (AAs ! i) ∧ poss_AA0 ⊆# CAs0 ! i
      using cas image_mset_of_subset unfolding subst_cls_def by metis
    then have l: ∀ L ∈# poss_AA0. is_pos L
      unfolding subst_cls_def by (metis Melem_subst_cls imageE literal.disc(1)
        literal.map_disc_iff set_image_mset subst_cls_def subst_lit_def)

```

define AA0 **where**

```
AA0 = image_mset atm_of poss_AA0
```

have na: poss AA0 = poss_AA0

```
using l unfolding AA0_def by auto
```

then have AA0 ·am ηs0 ! i = AAs ! i

```
using nn by (metis (mono_tags) literal.inject(1) multiset.inj_map_strong subst_cls_poss)
```

moreover have poss AA0 ⊆# CAs0 ! i

```
using na nn by auto
```

ultimately show ∃ AA0. AA0 ·am ηs0 ! i = AAs ! i ∧ poss AA0 ⊆# CAs0 ! i

```
by blast
```

qed

then obtain AAs0f **where**

```
AAs0f_p: ∀ i < n. AAs0f i ·am ηs0 ! i = AAs ! i ∧ (poss (AAs0f i)) ⊆# CAs0 ! i
```

```
by metis
```

define AAs0 **where** AAs0 = map AAs0f [0 ..<n]

then have length AAs0 = n

```
by auto
```

note n = n ⟨length AAs0 = n⟩

from AAs0_def **have** ∀ i < n. AAs0 ! i ·am ηs0 ! i = AAs ! i

```
using AAs0f_p by auto
```

then have AAs0_AAs: AAs0 ..aml ηs0 = AAs

```
using n by (auto intro: nth_equalityI)
```

from AAs0_def **have** AAs0_in_CAs0: ∀ i < n. poss (AAs0 ! i) ⊆# CAs0 ! i

```
using AAs0f_p by auto
```

define Cs0 **where**

```
Cs0 = map2 (−) CAs0 (map poss AAs0)
```

have length Cs0 = n

```
using Cs0_def n by auto
```

note n = n ⟨length Cs0 = n⟩

have $\forall i < n. CAs0 ! i = Cs0 ! i + poss (AAs0 ! i)$
using $AAs0_in_CA0\ Cs0_def\ n$ **by** *auto*
then have $Cs0 \cdot cl\ \eta s0 = Cs$
using $\langle CA0 \cdot cl\ \eta s0 = CA \rangle\ AAs0_AAs\ cas\ n$ **by** (*auto intro: nth_equalityI*)

show *?thesis*
using *that*
 $\langle AAs0 \cdot aml\ \eta s0 = AAs \rangle\ \langle Cs0 \cdot cl\ \eta s0 = Cs \rangle\ \langle \forall i < n. CAs0 ! i = Cs0 ! i + poss (AAs0 ! i) \rangle$
 $\langle length\ AAs0 = n \rangle\ \langle length\ Cs0 = n \rangle$
by *blast*
qed

— Obtain FO main premise

have $\exists DA0\ \eta0. DA0 \in M \wedge DA = DA0 \cdot \eta0 \wedge S\ DA0 \cdot \eta0 = S_M\ S\ M\ DA \wedge is_ground_subst\ \eta0$
using *grounding S_M_grounding_of_cls select* **by** (*metis le_supE singletonI subsetCE*)
then obtain $DA0\ \eta0$ **where**
 $DA0.\eta0.p: DA0 \in M \wedge DA = DA0 \cdot \eta0 \wedge S\ DA0 \cdot \eta0 = S_M\ S\ M\ DA \wedge is_ground_subst\ \eta0$
by *auto*

— The properties we need of the FO main premise

have $DA0_in_M: DA0 \in M$
using $DA0.\eta0.p$ **by** *auto*
have $DA0_to_DA: DA0 \cdot \eta0 = DA$
using $DA0.\eta0.p$ **by** *auto*
have $SDA0_to_SMDA: S\ DA0 \cdot \eta0 = S_M\ S\ M\ DA$
using $DA0.\eta0.p$ **by** *auto*
have $is_ground_subst\ \eta0$
using $DA0.\eta0.p$ **by** *auto*

— Split main premise DA0 into D0 and As0

obtain $D0\ As0$ **where** $D0As0.p:$
 $As0 \cdot al\ \eta0 = As\ length\ As0 = n\ D0 \cdot \eta0 = D\ DA0 = D0 + (negs\ (mset\ As0))$
 $S_M\ S\ M\ (D + negs\ (mset\ As)) \neq \{\#\} \implies negs\ (mset\ As0) = S\ DA0$

proof —

{
assume $a: S_M\ S\ M\ (D + negs\ (mset\ As)) = \{\#\} \wedge length\ As = (Suc\ 0)$
 $\wedge maximal_wrt\ (As ! 0 \cdot a\ \sigma)\ ((D + negs\ (mset\ As)) \cdot \sigma)$
then have $as: mset\ As = \{\#As ! 0\#\}$
by (*auto intro: nth_equalityI*)
then have $negs\ (mset\ As) = \{\#Neg\ (As ! 0)\#\}$
by (*simp add: \langle mset As = \{\#As ! 0\#\} \rangle*)
then have $DA = D + \{\#Neg\ (As ! 0)\#\}$
using *da* **by** *auto*
then obtain L **where** $L \in \# DA0 \wedge L \cdot l\ \eta0 = Neg\ (As ! 0)$
using $DA0_to_DA$ **by** (*metis Melem_subst_cls mset_subset_eq_add_right single_subset_iff*)
then have $Neg\ (atm_of\ L) \in \# DA0 \wedge Neg\ (atm_of\ L) \cdot l\ \eta0 = Neg\ (As ! 0)$
by (*metis Neg_atm_of_iff literal.sel(2) subst_lit_is_pos*)
then have $[atm_of\ L] \cdot al\ \eta0 = As \wedge negs\ (mset\ [atm_of\ L]) \subseteq \# DA0$
using *as subst_lit_def* **by** *auto*
then have $\exists As0. As0 \cdot al\ \eta0 = As \wedge negs\ (mset\ As0) \subseteq \# DA0$
 $\wedge (S_M\ S\ M\ (D + negs\ (mset\ As)) \neq \{\#\} \longrightarrow negs\ (mset\ As0) = S\ DA0)$
using *a* **by** *blast*
}

moreover

{
assume $S_M\ S\ M\ (D + negs\ (mset\ As)) = negs\ (mset\ As)$
then have $negs\ (mset\ As) = S\ DA0 \cdot \eta0$
using *da* $\langle S\ DA0 \cdot \eta0 = S_M\ S\ M\ DA \rangle$ **by** *auto*
then have $\exists As0. negs\ (mset\ As0) = S\ DA0 \wedge As0 \cdot al\ \eta0 = As$
using *instance_list[of As S DA0 \eta0] S.S_selects_neg_lits* **by** *auto*
then have $\exists As0. As0 \cdot al\ \eta0 = As \wedge negs\ (mset\ As0) \subseteq \# DA0$
 $\wedge (S_M\ S\ M\ (D + negs\ (mset\ As)) \neq \{\#\} \longrightarrow negs\ (mset\ As0) = S\ DA0)$
using *S.S_selects_subseteq* **by** *auto*
}

```

}
ultimately have  $\exists As0. As0 \cdot al \ \eta0 = As \wedge (negs \ (mset \ As0)) \subseteq\# \ DA0$ 
   $\wedge (S\_M \ S \ M \ (D + negs \ (mset \ As)) \neq \{\#\} \longrightarrow negs \ (mset \ As0) = S \ DA0)$ 
  using eligible unfolding eligible.simps by auto
then obtain As0 where
  As0.p:  $As0 \cdot al \ \eta0 = As \wedge negs \ (mset \ As0) \subseteq\# \ DA0$ 
   $\wedge (S\_M \ S \ M \ (D + negs \ (mset \ As)) \neq \{\#\} \longrightarrow negs \ (mset \ As0) = S \ DA0)$ 
  by blast
then have  $length \ As0 = n$ 
  using as_len by auto
note  $n = n$  this

have  $As0 \cdot al \ \eta0 = As$ 
  using As0.p by auto

define D0 where
   $D0 = DA0 - negs \ (mset \ As0)$ 
then have  $DA0 = D0 + negs \ (mset \ As0)$ 
  using As0.p by auto
then have  $D0 \cdot \eta0 = D$ 
  using DA0.to_DA da As0.p by auto

have  $S\_M \ S \ M \ (D + negs \ (mset \ As)) \neq \{\#\} \implies negs \ (mset \ As0) = S \ DA0$ 
  using As0.p by blast
then show ?thesis
  using that  $\langle As0 \cdot al \ \eta0 = As \rangle \langle D0 \cdot \eta0 = D \rangle \langle DA0 = D0 + (negs \ (mset \ As0)) \rangle \langle length \ As0 = n \rangle$ 
  by metis
qed

show ?thesis
  using that [OF  $n(2,1)$  DA0.in_M DA0.to_DA SDA0.to_SMDA CAs0.in_M CAs0.to_CAs SCAs0.to_SMCAs
     $\langle is\_ground\_subst \ \eta0 \rangle \langle is\_ground\_subst\_list \ \eta s0 \rangle \langle As0 \cdot al \ \eta0 = As \rangle$ 
     $\langle AAs0 \cdot aml \ \eta s0 = AAs \rangle$ 
     $\langle length \ As0 = n \rangle$ 
     $\langle D0 \cdot \eta0 = D \rangle$ 
     $\langle DA0 = D0 + (negs \ (mset \ As0)) \rangle$ 
     $\langle S\_M \ S \ M \ (D + negs \ (mset \ As)) \neq \{\#\} \implies negs \ (mset \ As0) = S \ DA0 \rangle$ 
     $\langle length \ Cs0 = n \rangle$ 
     $\langle Cs0 \cdot cl \ \eta s0 = Cs \rangle$ 
     $\langle \forall i < n. CAs0 \ ! \ i = Cs0 \ ! \ i + poss \ (AAs0 \ ! \ i) \rangle$ 
     $\langle length \ AAs0 = n \rangle$ ]
  by auto
qed

lemma
  assumes  $Pos \ A \in\# \ C$ 
  shows  $A \in \text{atms\_of} \ C$ 
  using assms
  by (simp add: atm_iff_pos_or_neg_lit)

lemma ord_resolve_rename_lifting:
  assumes
    sel_stable:  $\bigwedge \varrho \ C. is\_renaming \ \varrho \implies S \ (C \cdot \varrho) = S \ C \cdot \varrho$  and
    res.e: ord_resolve  $(S\_M \ S \ M) \ CAs \ DA \ AAs \ As \ \sigma \ E$  and
    select: selection S and
    grounding:  $\{DA\} \cup \text{set} \ CAs \subseteq \text{grounding\_of\_class} \ M$ 
  obtains  $\eta s \ \eta \ \eta2 \ CAs0 \ DA0 \ AAs0 \ As0 \ E0 \ \tau$  where
    is_ground_subst  $\eta$ 
    is_ground_subst_list  $\eta s$ 
    is_ground_subst  $\eta2$ 
    ord_resolve_rename  $S \ CAs0 \ DA0 \ AAs0 \ As0 \ \tau \ E0$ 

     $CAs0 \cdot cl \ \eta s = CAs \ DA0 \cdot \eta = DA \ E0 \cdot \eta2 = E$ 

```

```

    {DA0} ∪ set CAs0 ⊆ M
  using res_e
proof (cases rule: ord_resolve.cases)
case (ord_resolve n Cs D)
note da = this(1) and e = this(2) and cas_len = this(3) and cs_len = this(4) and
  aas_len = this(5) and as_len = this(6) and nz = this(7) and cas = this(8) and
  aas_not_empty = this(9) and mgu = this(10) and eligible = this(11) and str_max = this(12) and
  sel_empty = this(13)

have sel_ren_list_inv:
  ⋀ ρs Cs. length ρs = length Cs ⇒ is_renaming_list ρs ⇒ map S (Cs ..cl ρs) = map S Cs ..cl ρs
  using sel_stable unfolding is_renaming_list_def by (auto intro: nth_equalityI)

note n = ⟨n ≠ 0⟩ ⟨length CAs = n⟩ ⟨length Cs = n⟩ ⟨length AAs = n⟩ ⟨length As = n⟩

interpret S: selection S by (rule select)

obtain DA0 η0 CAs0 ηs0 As0 AAs0 D0 Cs0 where as0:
  length CAs0 = n
  length ηs0 = n
  DA0 ∈ M
  DA0 · η0 = DA
  S DA0 · η0 = S_M S M DA
  ∀ CA0 ∈ set CAs0. CA0 ∈ M
  CAs0 ..cl ηs0 = CAs
  map S CAs0 ..cl ηs0 = map (S_M S M) CAs
  is_ground_subst η0
  is_ground_subst_list ηs0
  As0 ·al η0 = As
  AAs0 ..aml ηs0 = AAs
  length As0 = n
  D0 · η0 = D
  DA0 = D0 + (negs (mset As0))
  S_M S M (D + negs (mset As)) ≠ {#} ⇒ negs (mset As0) = S DA0
  length Cs0 = n
  Cs0 ..cl ηs0 = Cs
  ∀ i < n. CAs0 ! i = Cs0 ! i + poss (AAs0 ! i)
  length AAs0 = n
  using ord_resolve_obtain_clauses[of S M CAs DA, OF res_e select grounding n(2) ⟨DA = D + negs (mset As)⟩
    ⟨∀ i < n. CAs ! i = Cs ! i + poss (AAs ! i)⟩ ⟨length Cs = n⟩ ⟨length AAs = n⟩, of thesis] by blast

note n = ⟨length CAs0 = n⟩ ⟨length ηs0 = n⟩ ⟨length As0 = n⟩ ⟨length AAs0 = n⟩ ⟨length Cs0 = n⟩ n

have length (renamings_apart (DA0 # CAs0)) = Suc n
  using n renamings_apart_length by auto

note n = this n

define ρ where
  ρ = hd (renamings_apart (DA0 # CAs0))
define ρs where
  ρs = tl (renamings_apart (DA0 # CAs0))
define DA0' where
  DA0' = DA0 · ρ
define D0' where
  D0' = D0 · ρ
define As0' where
  As0' = As0 ·al ρ
define CAs0' where
  CAs0' = CAs0 ..cl ρs
define Cs0' where
  Cs0' = Cs0 ..cl ρs
define AAs0' where

```

```

  AAs0' = AAs0 ..aml ρs
define η0' where
  η0' = inv_renaming ρ ⊙ η0
define ηs0' where
  ηs0' = map inv_renaming ρs ⊙s ηs0

have renames_DA0: is_renaming ρ
  using renamings_apart_length renamings_apart_renaming unfolding ρ_def
  by (metis length_greater_0_conv list.exhaust_sel list.set_intros(1) list.simps(3))

have renames_CAs0: is_renaming_list ρs
  using renamings_apart_length renamings_apart_renaming unfolding ρs_def
  by (metis is_renaming_list_def length_greater_0_conv list.set_sel(2) list.simps(3))

have length ρs = n
  unfolding ρs_def using n by auto
note n = n ⟨length ρs = n⟩
have length As0' = n
  unfolding As0'_def using n by auto
have length CAs0' = n
  using as0(1) n unfolding CAs0'_def by auto
have length Cs0' = n
  unfolding Cs0'_def using n by auto
have length AAs0' = n
  unfolding AAs0'_def using n by auto
have length ηs0' = n
  using as0(2) n unfolding ηs0'_def by auto
note n = ⟨length CAs0' = n⟩ ⟨length ηs0' = n⟩ ⟨length As0' = n⟩ ⟨length AAs0' = n⟩ ⟨length Cs0' = n⟩ n

have DA0'_DA: DA0' · η0' = DA
  using as0(4) unfolding η0'_def DA0'_def using renames_DA0 by simp
have D0'_D: D0' · η0' = D
  using as0(14) unfolding η0'_def D0'_def using renames_DA0 by simp
have As0'_As: As0' ·al η0' = As
  using as0(11) unfolding η0'_def As0'_def using renames_DA0 by auto
have S DA0' · η0' = S_M S M DA
  using as0(5) unfolding η0'_def DA0'_def using renames_DA0 sel_stable by auto
have CAs0'_CAs: CAs0' ..cl ηs0' = CAs
  using as0(7) unfolding CAs0'_def ηs0'_def using renames_CAs0 n by auto
have Cs0'_Cs: Cs0' ..cl ηs0' = Cs
  using as0(18) unfolding Cs0'_def ηs0'_def using renames_CAs0 n by auto
have AAs0'_AAs: AAs0' ..aml ηs0' = AAs
  using as0(12) unfolding ηs0'_def AAs0'_def using renames_CAs0 using n by auto
have map S CAs0' ..cl ηs0' = map (S_M S M) CAs
  unfolding CAs0'_def ηs0'_def using as0(8) n renames_CAs0 sel_ren_list_inv by auto

have DA0'_split: DA0' = D0' + negs (mset As0')
  using as0(15) DA0'_def D0'_def As0'_def by auto
then have D0'_subset_DA0': D0' ⊆# DA0'
  by auto
from DA0'_split have negs_As0'_subset_DA0': negs (mset As0') ⊆# DA0'
  by auto

have CAs0'_split: ∀ i < n. CAs0' ! i = Cs0' ! i + poss (AAs0' ! i)
  using as0(19) CAs0'_def Cs0'_def AAs0'_def n by auto
then have ∀ i < n. Cs0' ! i ⊆# CAs0' ! i
  by auto
from CAs0'_split have poss_AAs0'_subset_CAs0': ∀ i < n. poss (AAs0' ! i) ⊆# CAs0' ! i
  by auto
then have AAs0'_in_atms_of_CAs0': ∀ i < n. ∀ A ∈ #AAs0' ! i. A ∈ atms_of (CAs0' ! i)
  by (auto simp add: atm_iff_pos_or_neg_lit)

have as0':

```

$S.M S M (D + \text{negs } (\text{mset } As)) \neq \{\#\} \implies \text{negs } (\text{mset } As0') = S DA0'$

proof –

assume $a: S.M S M (D + \text{negs } (\text{mset } As)) \neq \{\#\}$
then have $\text{negs } (\text{mset } As0) \cdot \varrho = S DA0 \cdot \varrho$
using $as0(16)$ **unfolding** ϱ_def **by** $metis$
then show $\text{negs } (\text{mset } As0') = S DA0'$
using $As0'_def DA0'_def$ **using** $sel_stable[of \ \varrho \ DA0]$ **renames_DA0** **by** $auto$

qed

have $vd: \text{var_disjoint } (DA0' \# CAs0')$
unfolding $DA0'_def CAs0'_def$ **using** $renamings_apart_var_disjoint$
unfolding $\varrho_def \varrho_s_def$
by $(metis \text{length_greater_0_conv } list.\text{exhaust_sel } n(6) \text{substitution.subst_cls_lists_Cons } substitution.\text{axioms } zero_less_Suc)$

— Introduce ground substitution

from $vd DA0'_DA CAs0'_CAs$ **have** $\exists \eta. \forall i < Suc \ n. \forall S. S \subseteq \# (DA0' \# CAs0') ! i \longrightarrow S \cdot (\eta0' \# \eta s0') ! i = S \cdot \eta$

unfolding $var_disjoint_def$ **using** n **by** $auto$

then obtain η **where** $\eta.p: \forall i < Suc \ n. \forall S. S \subseteq \# (DA0' \# CAs0') ! i \longrightarrow S \cdot (\eta0' \# \eta s0') ! i = S \cdot \eta$
by $auto$

have $\eta.p_lit: \forall i < Suc \ n. \forall L. L \in \# (DA0' \# CAs0') ! i \longrightarrow L \cdot l (\eta0' \# \eta s0') ! i = L \cdot l \eta$

proof $(rule, rule, rule, rule)$

fix $i :: nat$ **and** $L :: 'a \text{ literal}$

assume $a:$
 $i < Suc \ n$
 $L \in \# (DA0' \# CAs0') ! i$

then have $\forall S. S \subseteq \# (DA0' \# CAs0') ! i \longrightarrow S \cdot (\eta0' \# \eta s0') ! i = S \cdot \eta$
using $\eta.p$ **by** $auto$

then have $\{\# L \#\} \cdot (\eta0' \# \eta s0') ! i = \{\# L \#\} \cdot \eta$
using a **by** $(meson \text{single_subset_iff})$

then show $L \cdot l (\eta0' \# \eta s0') ! i = L \cdot l \eta$ **by** $auto$

qed

have $\eta.p_atm: \forall i < Suc \ n. \forall A. A \in \text{atms_of } ((DA0' \# CAs0') ! i) \longrightarrow A \cdot a (\eta0' \# \eta s0') ! i = A \cdot a \eta$

proof $(rule, rule, rule, rule)$

fix $i :: nat$ **and** $A :: 'a$

assume $a:$
 $i < Suc \ n$
 $A \in \text{atms_of } ((DA0' \# CAs0') ! i)$

then obtain L **where** $L.p: \text{atm_of } L = A \wedge L \in \# (DA0' \# CAs0') ! i$
unfolding atms_of_def **by** $auto$

then have $L \cdot l (\eta0' \# \eta s0') ! i = L \cdot l \eta$
using $\eta.p_lit \ a$ **by** $auto$

then show $A \cdot a (\eta0' \# \eta s0') ! i = A \cdot a \eta$
using $L.p$ **unfolding** subst_lit_def **by** $(cases \ L) \ auto$

qed

have $DA0'_DA: DA0' \cdot \eta = DA$
using $DA0'_DA \ \eta.p$ **by** $auto$

have $D0' \cdot \eta = D$ **using** $\eta.p \ D0'_D \ n \ D0'_subset_DA0'$ **by** $auto$

have $As0' \cdot al \ \eta = As$

proof $(rule \ \text{nth_equalityI})$

show $\text{length } (As0' \cdot al \ \eta) = \text{length } As$
using n **by** $auto$

next

show $(As0' \cdot al \ \eta) ! i = As ! i$ **if** $a: i < \text{length } (As0' \cdot al \ \eta)$ **for** i

proof –

have $A.eq: \forall A. A \in \text{atms_of } DA0' \longrightarrow A \cdot a \ \eta0' = A \cdot a \ \eta$
using $\eta.p_atm \ n$ **by** $force$

have $As0' ! i \in \text{atms_of } DA0'$
using $\text{negs_As0'_subset_DA0'}$ **unfolding** atms_of_def
using $a \ n$ **by** $force$

then have $As0' ! i \cdot a \ \eta0' = As0' ! i \cdot a \ \eta$

```

    using A_eq by simp
    then show (As0' · al η) ! i = As ! i
      using As0'_As ⟨length As0' = n⟩ a by auto
  qed
qed

have S DA0' · η = S_M S M DA
  using ⟨S DA0' · η0' = S_M S M DA⟩ η_p S.S_selects_subseteq by auto

from η_p have η_p-CAs0': ∀ i < n. (CAs0' ! i) · (ηs0' ! i) = (CAs0' ! i) · η
  using n by auto
then have CAs0' · cl ηs0' = CAs0' · cl η
  using n by (auto intro: nth_equalityI)
then have CAs0'_η-fo-CAs: CAs0' · cl η = CAs
  using CAs0'_CAs η_p n by auto

from η_p have ∀ i < n. S (CAs0' ! i) · ηs0' ! i = S (CAs0' ! i) · η
  using S.S_selects_subseteq n by auto
then have map S CAs0' · cl ηs0' = map S CAs0' · cl η
  using n by (auto intro: nth_equalityI)
then have SCAs0'_η-fo-SMCAs: map S CAs0' · cl η = map (S_M S M) CAs
  using ⟨map S CAs0' · cl ηs0' = map (S_M S M) CAs⟩ by auto

have Cs0' · cl η = Cs
proof (rule nth_equalityI)
  show length (Cs0' · cl η) = length Cs
    using n by auto
next
  show (Cs0' · cl η) ! i = Cs ! i if i < length (Cs0' · cl η) for i
  proof -
    have a: i < n
      using that n by force
    have (Cs0' · cl ηs0') ! i = Cs ! i
      using Cs0'_Cs a n by force
    moreover
    have η_p-CAs0': ∀ S. S ⊆# CAs0' ! i ⟶ S · ηs0' ! i = S · η
      using η_p a by force
    have Cs0' ! i · ηs0' ! i = (Cs0' · cl η) ! i
      using η_p-CAs0' ⟨∀ i < n. Cs0' ! i ⊆# CAs0' ! i⟩ a n by force
    then have (Cs0' · cl ηs0') ! i = (Cs0' · cl η) ! i
      using a n by force
    ultimately show (Cs0' · cl η) ! i = Cs ! i
      by auto
  qed
qed

have AAs0'_AAs: AAs0' · aml η = AAs
proof (rule nth_equalityI)
  show length (AAs0' · aml η) = length AAs
    using n by auto
next
  show (AAs0' · aml η) ! i = AAs ! i if a: i < length (AAs0' · aml η) for i
  proof -
    have i < n
      using that n by force
    then have ∀ A. A ∈ atms_of ((DA0' # CAs0') ! Suc i) ⟶ A · a (η0' # ηs0') ! Suc i = A · a η
      using η_p_atm n by force
    then have A_eq: ∀ A. A ∈ atms_of (CAs0' ! i) ⟶ A · a ηs0' ! i = A · a η
      by auto
    have AAs-CAs0': ∀ A ∈# AAs0' ! i. A ∈ atms_of (CAs0' ! i)
      using AAs0'_in_atms_of_CAs0' unfolding atms_of_def
      using a n by force
    then have AAs0' ! i · am ηs0' ! i = AAs0' ! i · am η

```

```

    unfolding subst_atm_mset_def using A_eq unfolding subst_atm_mset_def by auto
  then show (AAs0' · aml η) ! i = AAs ! i
    using AAs0'_AAs ⟨length AAs0' = n⟩ ⟨length ηs0' = n⟩ a by auto
qed

```

— Obtain MGU and substitution

```

obtain τ φ where τφ:
  Some τ = mgu (set_mset ' set (map2 add_mset As0' AAs0'))
  τ ⊙ φ = η ⊙ σ
proof -
  have uu: is_unifiers σ (set_mset ' set (map2 add_mset (As0' · al η) (AAs0' · aml η)))
    using mgu mgu_sound is_mgu_def unfolding ⟨AAs0' · aml η = AAs⟩ using ⟨As0' · al η = As⟩ by auto
  have ησuni: is_unifiers (η ⊙ σ) (set_mset ' set (map2 add_mset As0' AAs0'))
  proof -
    have set_mset ' set (map2 add_mset As0' AAs0' · aml η) =
      set_mset ' set (map2 add_mset As0' AAs0') · ass η
    unfolding subst_atmss_def subst_atm_mset_list_def using subst_atm_mset_def subst_atms_def
    by (simp add: image_image subst_atm_mset_def subst_atms_def)
    then have is_unifiers σ (set_mset ' set (map2 add_mset As0' AAs0') · ass η)
      using uu by (auto simp: n map2_add_mset_map)
    then show ?thesis
      using is_unifiers_comp by auto
  qed
then obtain τ where
  τ_p: Some τ = mgu (set_mset ' set (map2 add_mset As0' AAs0'))
  using mgu_complete
  by (metis (mono_tags, hide_lams) List.finite_set finite_imageI finite_set_mset image_iff)
moreover then obtain φ where φ_p: τ ⊙ φ = η ⊙ σ
  by (metis (mono_tags, hide_lams) finite_set ησuni finite_imageI finite_set_mset image_iff
    mgu_sound set_mset_mset substitution_ops.is_mgu_def)
ultimately show thesis
  using that by auto
qed

```

— Lifting eligibility

```

have eligible0': eligible S τ As0' (D0' + negs (mset As0'))
proof -
  have S_M S M (D + negs (mset As)) = negs (mset As) ∨ S_M S M (D + negs (mset As)) = {#} ∧
    length As = 1 ∧ maximal_wrt (As ! 0 · a σ) ((D + negs (mset As)) · σ)
  using eligible unfolding eligible.simps by auto
  then show ?thesis
  proof
    assume S_M S M (D + negs (mset As)) = negs (mset As)
    then have S_M S M (D + negs (mset As)) ≠ {#}
      using n by force
    then have S (D0' + negs (mset As0')) = negs (mset As0')
      using as0' DA0'_split by auto
    then show ?thesis
      unfolding eligible.simps[simplified] by auto
  next
    assume asm: S_M S M (D + negs (mset As)) = {#} ∧ length As = 1 ∧
      maximal_wrt (As ! 0 · a σ) ((D + negs (mset As)) · σ)
    then have S (D0' + negs (mset As0')) = {#}
      using ⟨D0' · η = D⟩[symmetric] ⟨As0' · al η = As⟩[symmetric] ⟨S (DA0') · η = S_M S M (DA)⟩
      da DA0'_split subst_cls_empty_iff by metis
    moreover from asm have l: length As0' = 1
      using ⟨As0' · al η = As⟩ by auto
    moreover from asm have maximal_wrt (As0' ! 0 · a (τ ⊙ φ)) ((D0' + negs (mset As0')) · (τ ⊙ φ))
      using ⟨As0' · al η = As⟩ ⟨D0' · η = D⟩ using l τφ by auto
    then have maximal_wrt (As0' ! 0 · a τ · a φ) ((D0' + negs (mset As0')) · τ · φ)
      by auto
    then have maximal_wrt (As0' ! 0 · a τ) ((D0' + negs (mset As0')) · τ)

```

using *maximal_wrt_subst* by *blast*
 ultimately show *?thesis*
 unfolding *eligible.simps[simplified]* by *auto*
 qed
 qed

— Lifting maximality

have *maximality*: $\forall i < n. \text{strictly_maximal_wrt } (As0' ! i \cdot a \tau) (Cs0' ! i \cdot \tau)$

proof –

from *str_max* have $\forall i < n. \text{strictly_maximal_wrt } ((As0' \cdot al \eta) ! i \cdot a \sigma) ((Cs0' \cdot cl \eta) ! i \cdot \sigma)$
 using $\langle As0' \cdot al \eta = As \rangle \langle Cs0' \cdot cl \eta = Cs \rangle$ by *simp*
 then have $\forall i < n. \text{strictly_maximal_wrt } (As0' ! i \cdot a (\tau \odot \varphi)) (Cs0' ! i \cdot (\tau \odot \varphi))$
 using $n \tau \varphi$ by *simp*
 then have $\forall i < n. \text{strictly_maximal_wrt } (As0' ! i \cdot a \tau \cdot a \varphi) (Cs0' ! i \cdot \tau \cdot \varphi)$
 by *auto*
 then show $\forall i < n. \text{strictly_maximal_wrt } (As0' ! i \cdot a \tau) (Cs0' ! i \cdot \tau)$
 using *strictly_maximal_wrt_subst* $\tau \varphi$ by *blast*
 qed

— Lifting nothing being selected

have *nothing_selected*: $\forall i < n. S (CAAs0' ! i) = \{\#\}$

proof –

have $\forall i < n. (\text{map } S \text{ } CAAs0' \cdot cl \eta) ! i = \text{map } (S_M \ S \ M) \ CAAs ! i$
 by (*simp add*: $\langle \text{map } S \ CAAs0' \cdot cl \eta = \text{map } (S_M \ S \ M) \ CAAs \rangle$)
 then have $\forall i < n. S (CAAs0' ! i) \cdot \eta = S_M \ S \ M (CAAs ! i)$
 using n by *auto*
 then have $\forall i < n. S (CAAs0' ! i) \cdot \eta = \{\#\}$
 using *sel_empty* $\langle \forall i < n. S (CAAs0' ! i) \cdot \eta = S_M \ S \ M (CAAs ! i) \rangle$ by *auto*
 then show $\forall i < n. S (CAAs0' ! i) = \{\#\}$
 using *subst_cls_empty_iff* by *blast*
 qed

— Lifting AAs0's non-emptiness

have $\forall i < n. AAs0' ! i \neq \{\#\}$
 using $n \text{ aas_not_empty } \langle AAs0' \cdot aml \eta = AAs \rangle$ by *auto*

— Resolve the lifted clauses

define *E0'* **where**

$E0' = (\bigcup \# (mset \ Cs0') + D0') \cdot \tau$

have *res_e0'*: *ord_resolve* $S \ CAAs0' \ DA0' \ AAs0' \ As0' \ \tau \ E0'$

using *ord_resolve.intros* $[of \ CAAs0' \ n \ Cs0' \ AAs0' \ As0' \ \tau \ S \ D0',$

$OF \ \dots \ \langle \forall i < n. AAs0' ! i \neq \{\#\} \rangle \ \tau \varphi(1) \ \text{eligible0}'$

$\langle \forall i < n. \text{strictly_maximal_wrt } (As0' ! i \cdot a \tau) (Cs0' ! i \cdot \tau) \rangle \langle \forall i < n. S (CAAs0' ! i) = \{\#\} \rangle]$

unfolding *E0'_def* using *DA0'_split* $n \langle \forall i < n. CAAs0' ! i = Cs0' ! i + \text{poss } (AAs0' ! i) \rangle$ by *blast*

— Prove resolvent instantiates to ground resolvent

have *e0'φe*: $E0' \cdot \varphi = E$

proof –

have $E0' \cdot \varphi = (\bigcup \# (mset \ Cs0') + D0') \cdot (\tau \odot \varphi)$

unfolding *E0'_def* by *auto*

also have $\dots = (\bigcup \# (mset \ Cs0') + D0') \cdot (\eta \odot \sigma)$

using $\tau \varphi$ by *auto*

also have $\dots = (\bigcup \# (mset \ Cs) + D) \cdot \sigma$

using $\langle Cs0' \cdot cl \eta = Cs \rangle \langle D0' \cdot \eta = D \rangle$ by *auto*

also have $\dots = E$

using *e* by *auto*

finally show *e0'φe*: $E0' \cdot \varphi = E$

qed

— Replace φ with a true ground substitution


```

obtain  $\eta 2$  where
  ground_η2: is_ground_subst  $\eta 2$   $E0' \cdot \eta 2 = E$ 
proof —
  have is_ground_cls_list CAs is_ground_cls DA
    using grounding grounding_ground unfolding is_ground_cls_list_def by auto
  then have is_ground_cls E
    using res_e ground_resolver_subset by (force intro: is_ground_cls_mono)
  then show thesis
    using that e0'φe make_ground_subst by auto
qed

— Wrap up the proof
have ord_resolve S (CAs0  $\cdot$  cl qs) (DA0  $\cdot$  ρ) (AAs0  $\cdot$  aml qs) (As0  $\cdot$  al ρ)  $\tau$  E0'
  using res_e0' As0'_def ρ_def AAs0'_def qs_def DA0'_def ρ_def CAs0'_def qs_def by simp
moreover have  $\forall i < n. \text{poss } (AAs0 \ ! \ i) \subseteq\# \ CAs0 \ ! \ i$ 
  using as0(19) by auto
moreover have negs (mset As0)  $\subseteq\#$  DA0
  using local.as0(15) by auto
ultimately have ord_resolve_rename S CAs0 DA0 AAs0 As0  $\tau$  E0'
  using ord_resolve_rename[of CAs0 n AAs0 As0 DA0 ρ qs S  $\tau$  E0'] ρ_def qs_def n by auto
then show thesis
  using that[of  $\eta 0$   $\eta s 0$   $\eta 2$  CAs0 DA0] (is_ground_subst  $\eta 0$ ) (is_ground_subst_list  $\eta s 0$ )
    (is_ground_subst  $\eta 2$ ) (CAs0  $\cdot$  cl  $\eta s 0 = CAs$ ) (DA0  $\cdot$   $\eta 0 = DA$ ) (E0' \cdot \eta 2 = E) (DA0  $\in M$ )
    ( $\forall CA \in \text{set } CAs0. CA \in M$ ) by blast
qed

end

end

```

15 An Ordered Resolution Prover for First-Order Clauses

```

theory FO_Ordered_Resolution_Prover
  imports FO_Ordered_Resolution
begin

```

This material is based on Section 4.3 (“A Simple Resolution Prover for First-Order Clauses”) of Bachmair and Ganzinger’s chapter. Specifically, it formalizes the RP prover defined in Figure 5 and its related lemmas and theorems, including Lemmas 4.10 and 4.11 and Theorem 4.13 (completeness).

```

definition is_least :: (nat  $\Rightarrow$  bool)  $\Rightarrow$  nat  $\Rightarrow$  bool where
  is_least P n  $\longleftrightarrow P \ n \wedge (\forall n' < n. \neg P \ n')$ 

```

```

lemma least_exists:  $P \ n \Longrightarrow \exists n. \text{is\_least } P \ n$ 
  using exists_least_iff unfolding is_least_def by auto

```

The following corresponds to page 42 and 43 of Section 4.3, from the explanation of RP to Lemma 4.10.

```

type-synonym 'a state = 'a clause set  $\times$  'a clause set  $\times$  'a clause set

```

```

locale FO_resolution_prover =
  FO_resolution subst_atm id_subst comp_subst renamings_apart atm_of_atms mgu less_atm +
  selection S
for
  S :: ('a :: wellorder) clause  $\Rightarrow$  'a clause and
  subst_atm :: 'a  $\Rightarrow$  's  $\Rightarrow$  'a and
  id_subst :: 's and
  comp_subst :: 's  $\Rightarrow$  's  $\Rightarrow$  's and
  renamings_apart :: 'a clause list  $\Rightarrow$  's list and
  atm_of_atms :: 'a list  $\Rightarrow$  'a and
  mgu :: 'a set set  $\Rightarrow$  's option and
  less_atm :: 'a  $\Rightarrow$  'a  $\Rightarrow$  bool +
assumes

```

sel_stable: $\bigwedge \varrho C. \text{is_renaming } \varrho \implies S (C \cdot \varrho) = S C \cdot \varrho$ **and**
less_atm_ground: $\text{is_ground_atm } A \implies \text{is_ground_atm } B \implies \text{less_atm } A B \implies A < B$
begin

fun *N_of_state* :: 'a state \Rightarrow 'a clause set **where**
N_of_state (N, P, Q) = N

fun *P_of_state* :: 'a state \Rightarrow 'a clause set **where**
P_of_state (N, P, Q) = P

O denotes relation composition in Isabelle, so the formalization uses Q instead.

fun *Q_of_state* :: 'a state \Rightarrow 'a clause set **where**
Q_of_state (N, P, Q) = Q

definition *clss_of_state* :: 'a state \Rightarrow 'a clause set **where**
clss_of_state St = *N_of_state* St \cup *P_of_state* St \cup *Q_of_state* St

abbreviation *grounding_of_state* :: 'a state \Rightarrow 'a clause set **where**
grounding_of_state St \equiv *grounding_of_clss* (*clss_of_state* St)

interpretation *ord_FO_resolution*: *inference_system* *ord_FO* Γ S .

The following inductive predicate formalizes the resolution prover in Figure 5.

inductive *RP* :: 'a state \Rightarrow 'a state \Rightarrow bool (**infix** \rightsquigarrow 50) **where**
tautology_deletion: $\text{Neg } A \in \# C \implies \text{Pos } A \in \# C \implies (N \cup \{C\}, P, Q) \rightsquigarrow (N, P, Q)$
forward_subsumption: $D \in P \cup Q \implies \text{subsumes } D C \implies (N \cup \{C\}, P, Q) \rightsquigarrow (N, P, Q)$
backward_subsumption_P: $D \in N \implies \text{strictly_subsumes } D C \implies (N, P \cup \{C\}, Q) \rightsquigarrow (N, P, Q)$
backward_subsumption_Q: $D \in N \implies \text{strictly_subsumes } D C \implies (N, P, Q \cup \{C\}) \rightsquigarrow (N, P, Q)$
forward_reduction: $D + \{\#L'\# \} \in P \cup Q \implies -L = L' \cdot l \sigma \implies D \cdot \sigma \subseteq \# C \implies$
 $(N \cup \{C + \{\#L\#\}\}, P, Q) \rightsquigarrow (N \cup \{C\}, P, Q)$
backward_reduction_P: $D + \{\#L'\# \} \in N \implies -L = L' \cdot l \sigma \implies D \cdot \sigma \subseteq \# C \implies$
 $(N, P \cup \{C + \{\#L\#\}\}, Q) \rightsquigarrow (N, P \cup \{C\}, Q)$
backward_reduction_Q: $D + \{\#L'\# \} \in N \implies -L = L' \cdot l \sigma \implies D \cdot \sigma \subseteq \# C \implies$
 $(N, P, Q \cup \{C + \{\#L\#\}\}) \rightsquigarrow (N, P \cup \{C\}, Q)$
clause_processing: $(N \cup \{C\}, P, Q) \rightsquigarrow (N, P \cup \{C\}, Q)$
inference_computation: $N = \text{concls_of } (\text{ord_FO_resolution.inferences_between } Q C) \implies$
 $(\{\}, P \cup \{C\}, Q) \rightsquigarrow (N, P, Q \cup \{C\})$

lemma *final_RP*: $\neg (\{\}, \{\}, Q) \rightsquigarrow St$
by (*auto elim: RP.cases*)

definition *Sup_state* :: 'a state llist \Rightarrow 'a state **where**
Sup_state Sts =
 $(\text{Sup_lmap } (\text{lmap } N_of_state \text{ Sts}), \text{Sup_lmap } (\text{lmap } P_of_state \text{ Sts}),$
 $\text{Sup_lmap } (\text{lmap } Q_of_state \text{ Sts}))$

definition *Liminf_state* :: 'a state llist \Rightarrow 'a state **where**
Liminf_state Sts =
 $(\text{Liminf_lmap } (\text{lmap } N_of_state \text{ Sts}), \text{Liminf_lmap } (\text{lmap } P_of_state \text{ Sts}),$
 $\text{Liminf_lmap } (\text{lmap } Q_of_state \text{ Sts}))$

context

fixes *Sts Sts'* :: 'a state llist

assumes *Sts*: *lfinite* *Sts* *lfinite* *Sts'* \neg *lnull* *Sts* \neg *lnull* *Sts'* *llast* *Sts'* = *llast* *Sts*

begin

lemma

N_of_Liminf_state_fin: *N_of_state* (*Liminf_state* *Sts'*) = *N_of_state* (*Liminf_state* *Sts*) **and**
P_of_Liminf_state_fin: *P_of_state* (*Liminf_state* *Sts'*) = *P_of_state* (*Liminf_state* *Sts*) **and**
Q_of_Liminf_state_fin: *Q_of_state* (*Liminf_state* *Sts'*) = *Q_of_state* (*Liminf_state* *Sts*)
using *Sts* **by** (*simp_all add: Liminf_state_def lfinite_Liminf_lmap llmap*)

lemma *Liminf_state_fin*: *Liminf_state* *Sts'* = *Liminf_state* *Sts*

```

using N_of_Liminf_state_fin P_of_Liminf_state_fin Q_of_Liminf_state_fin
by (simp add: Liminf_state_def)

end

context
  fixes Sts Sts' :: 'a state llist
  assumes Sts:  $\neg$  lfinite Sts emb Sts Sts'
begin

lemma
  N_of_Liminf_state_inf: N_of_state (Liminf_state Sts')  $\subseteq$  N_of_state (Liminf_state Sts) and
  P_of_Liminf_state_inf: P_of_state (Liminf_state Sts')  $\subseteq$  P_of_state (Liminf_state Sts) and
  Q_of_Liminf_state_inf: Q_of_state (Liminf_state Sts')  $\subseteq$  Q_of_state (Liminf_state Sts)
  using Sts by (simp_all add: Liminf_state_def emb_Liminf_llist_infinite emb_lmap)

lemma cls_of_Liminf_state_inf:
  cls_of_state (Liminf_state Sts')  $\subseteq$  cls_of_state (Liminf_state Sts)
  unfolding cls_of_state_def
  using N_of_Liminf_state_inf P_of_Liminf_state_inf Q_of_Liminf_state_inf by blast

end

definition fair_state_seq :: 'a state llist  $\Rightarrow$  bool where
  fair_state_seq Sts  $\longleftrightarrow$  N_of_state (Liminf_state Sts) = {}  $\wedge$  P_of_state (Liminf_state Sts) = {}

The following formalizes Lemma 4.10.

context
  fixes
    Sts :: 'a state llist
  assumes
    deriv: chain ( $\rightsquigarrow$ ) Sts and
    empty_Q0: Q_of_state (lhd Sts) = {}

begin

lemmas lhd_lmap_Sts = lmap_sel(1)[OF chain_not_innull[OF deriv]]

definition S_Q :: 'a clause  $\Rightarrow$  'a clause where
  S_Q = S_M S (Q_of_state (Liminf_state Sts))

interpretation sq: selection S_Q
  unfolding S_Q_def using S_M_selects_subseteq S_M_selects_neg_lits selection_axioms
  by unfold_locales auto

interpretation gr: ground_resolution_with_selection S_Q
  by unfold_locales

interpretation sr: standard_redundancy_criterion_reductive gr.ord $\Gamma$ 
  by unfold_locales

interpretation sr: standard_redundancy_criterion_counterex_reducing gr.ord $\Gamma$ 
  ground_resolution_with_selection.INTERP S_Q
  by unfold_locales

The extension of ordered resolution mentioned in 4.10. We let it consist of all sound rules.

definition ground_sound $\Gamma$ :: 'a inference set where
  ground_sound $\Gamma$  = {Infer CC D E | CC D E. ( $\forall I$ .  $I \models_m CC \longrightarrow I \models D \longrightarrow I \models E$ )}

We prove that we indeed defined an extension.

lemma gd_ord $\Gamma$ _ngd_ord $\Gamma$ : gr.ord $\Gamma$   $\subseteq$  ground_sound $\Gamma$ 
  unfolding ground_sound $\Gamma$ _def using gr.ord $\Gamma$ _def gr.ord_resolve_sound by fastforce

```

lemma *sound_ground_sound_Γ*: *sound_inference_system ground_sound_Γ*
unfolding *sound_inference_system_def ground_sound_Γ_def* **by** *auto*

lemma *sat_preserving_ground_sound_Γ*: *sat_preserving_inference_system ground_sound_Γ*
using *sound_ground_sound_Γ sat_preserving_inference_system.intro*
sound_inference_system.Γ_sat_preserving **by** *blast*

definition *sr_ext_Ri* :: 'a clause set \Rightarrow 'a inference set **where**
sr_ext_Ri $N = sr.Ri\ N \cup (ground_sound_Γ - gr.ord_Γ)$

interpretation *sr_ext*:
sat_preserving_redundancy_criterion ground_sound_Γ sr.Rf sr_ext_Ri
unfolding *sat_preserving_redundancy_criterion_def sr_ext_Ri_def*
using *sat_preserving_ground_sound_Γ redundancy_criterion_standard_extension gd_ord_Γ_ngd_ord_Γ*
sr.redundancy_criterion_axioms **by** *auto*

lemma *strict_subset_subsumption_redundant_clause*:

assumes

sub: $D \cdot \sigma \subset\# C$ **and**

ground_σ: *is_ground_subst* σ

shows $C \in sr.Rf (grounding_of_cls\ D)$

proof –

from *sub* **have** $\forall I. I \models D \cdot \sigma \longrightarrow I \models C$

unfolding *true_cls_def* **by** *blast*

moreover **have** $C > D \cdot \sigma$

using *sub* **by** (*simp add: subset_imp_less_mset*)

moreover **have** $D \cdot \sigma \in grounding_of_cls\ D$

using *ground_σ* **by** (*metis (mono_tags, lifting) mem_Collect_eq substitution_ops_grounding_of_cls_def*)

ultimately **have** $set_mset\ \{\#D \cdot \sigma\} \subseteq grounding_of_cls\ D$

($\forall I. I \models m\ \{\#D \cdot \sigma\} \longrightarrow I \models C$)

($\forall D'. D' \in\# \{\#D \cdot \sigma\} \longrightarrow D' < C$)

by *auto*

then **show** *?thesis*

using *sr.Rf_def* **by** *blast*

qed

lemma *strict_subset_subsumption_redundant_cls*:

assumes

$D \cdot \sigma \subset\# C$ **and**

is_ground_subst σ **and**

$D \in CC$

shows $C \in sr.Rf (grounding_of_cls\ CC)$

using *assms*

proof –

have $C \in sr.Rf (grounding_of_cls\ D)$

using *strict_subset_subsumption_redundant_clause assms* **by** *auto*

then **show** *?thesis*

using *assms* **unfolding** *cls_of_state_def grounding_of_cls_def*

by (*metis (no_types) sr.Rf_mono sup_ge1 SUP_absorb contra_subsetD*)

qed

lemma *strict_subset_subsumption_grounding_redundant_cls*:

assumes

Dσ_subset_C: $D \cdot \sigma \subset\# C$ **and**

D_in_St: $D \in CC$

shows $grounding_of_cls\ C \subseteq sr.Rf (grounding_of_cls\ CC)$

proof

fix $C\mu$

assume $C\mu \in grounding_of_cls\ C$

then **obtain** μ **where**

μ_p : $C\mu = C \cdot \mu \wedge is_ground_subst\ \mu$

unfolding *grounding_of_cls_def* **by** *auto*

have $D\sigma\mu C\mu$: $D \cdot \sigma \cdot \mu \subset\# C \cdot \mu$

```

    using  $D\sigma$ .subset_C subst_subset_mono by auto
  then show  $C\mu \in sr.Rf$  (grounding_of_cls CC)
    using  $\mu.p$  strict_subset_subsumption_redundant_cls[of  $D \sigma \odot \mu C \cdot \mu$ ]  $D.in\_St$ 
    unfolding cls_of_state_def by auto
qed

```

```

lemma subst_cls_eq_grounding_of_cls_subset_eq:
  assumes  $D \cdot \sigma = C$ 
  shows grounding_of_cls  $C \subseteq$  grounding_of_cls  $D$ 
proof
  fix  $C\sigma'$ 
  assume  $C\sigma' \in$  grounding_of_cls  $C$ 
  then obtain  $\sigma'$  where
     $C\sigma': C \cdot \sigma' = C\sigma'$  is_ground_subst  $\sigma'$ 
    unfolding grounding_of_cls_def by auto
  then have  $C \cdot \sigma' = D \cdot \sigma \cdot \sigma' \wedge$  is_ground_subst  $(\sigma \odot \sigma')$ 
    using assms by auto
  then show  $C\sigma' \in$  grounding_of_cls  $D$ 
    unfolding grounding_of_cls_def using  $C\sigma'(1)$  by force
qed

```

```

lemma derive_if_remove_subsumed:
  assumes
     $D \in$  cls_of_state  $St$  and
    subsumes  $D C$ 
  shows  $sr.ext.derive$  (grounding_of_state  $St \cup$  grounding_of_cls  $C$ ) (grounding_of_state  $St$ )
proof -
  from assms obtain  $\sigma$  where
     $D \cdot \sigma = C \vee D \cdot \sigma \subset\# C$ 
    by (auto simp: subsumes_def subset_mset_def)
  then have  $D \cdot \sigma = C \vee D \cdot \sigma \subset\# C$ 
    by (simp add: subset_mset_def)
  then show ?thesis
proof
  assume  $D \cdot \sigma = C$ 
  then have grounding_of_cls  $C \subseteq$  grounding_of_cls  $D$ 
    using subst_cls_eq_grounding_of_cls_subset_eq by simp
  then have (grounding_of_state  $St \cup$  grounding_of_cls  $C$ ) = grounding_of_state  $St$ 
    using assms unfolding cls_of_state_def grounding_of_cls_def by auto
  then show ?thesis
    by (auto intro: sr_ext.derive.intros)
next
  assume  $a: D \cdot \sigma \subset\# C$ 
  then have grounding_of_cls  $C \subseteq sr.Rf$  (grounding_of_state  $St$ )
    using strict_subset_subsumption_grounding_redundant_cls assms by auto
  then show ?thesis
    unfolding cls_of_state_def grounding_of_cls_def by (force intro: sr_ext.derive.intros)
qed
qed

```

```

lemma reduction_in_concls_of:
  assumes
     $C\mu \in$  grounding_of_cls  $C$  and
     $D + \{\#L'\# \} \in CC$  and
     $- L = L' \cdot l \sigma$  and
     $D \cdot \sigma \subseteq\# C$ 
  shows  $C\mu \in$  concls_of ( $sr.ext.inferences\_from$  (grounding_of_cls ( $CC \cup \{C + \{\#L'\#\}$ )))
proof -
  from assms
  obtain  $\mu$  where
     $\mu.p: C\mu = C \cdot \mu \wedge$  is_ground_subst  $\mu$ 
    unfolding grounding_of_cls_def by auto

```

define γ **where**

$\gamma = \text{Infer } \{\#(C + \{\#L\#\}) \cdot \mu\# \} ((D + \{\#L'\#\}) \cdot \sigma \cdot \mu) (C \cdot \mu)$

have $(D + \{\#L'\#\}) \cdot \sigma \cdot \mu \in \text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\})$

unfolding $\text{grounding_of_clss_def } \text{grounding_of_cls_def}$

by $(\text{rule } UN_I[\text{of } D + \{\#L'\#\}], \text{ use } \text{assms}(2) \text{ clss_of_state_def in simp,}$

$\text{metis } (\text{mono_tags, lifting}) \mu_p \text{ is_ground_comp_subst mem_Collect_eq subst_cls_comp_subst})$

moreover have $(C + \{\#L\#\}) \cdot \mu \in \text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\})$

using μ_p **unfolding** $\text{grounding_of_clss_def } \text{grounding_of_cls_def}$ **by** auto

moreover have $\forall I. I \models D \cdot \sigma \cdot \mu + \{\#-(L \cdot l \mu)\#\} \longrightarrow I \models C \cdot \mu + \{\#L \cdot l \mu\#\} \longrightarrow I \models D \cdot \sigma \cdot \mu + C \cdot \mu$

by auto

then have $\forall I. I \models (D + \{\#L'\#\}) \cdot \sigma \cdot \mu \longrightarrow I \models (C + \{\#L\#\}) \cdot \mu \longrightarrow I \models D \cdot \sigma \cdot \mu + C \cdot \mu$

using assms

by $(\text{metis } \text{add_mset_add_single } \text{subst_cls_add_mset } \text{subst_cls_union } \text{subst_minus})$

then have $\forall I. I \models (D + \{\#L'\#\}) \cdot \sigma \cdot \mu \longrightarrow I \models (C + \{\#L\#\}) \cdot \mu \longrightarrow I \models C \cdot \mu$

using assms **by** $(\text{metis } (\text{no_types, lifting}) \text{subset_mset.le_iff_add } \text{subst_cls_union } \text{true_cls_union})$

then have $\forall I. I \models \#(D + \{\#L'\#\}) \cdot \sigma \cdot \mu\# \longrightarrow I \models (C + \{\#L\#\}) \cdot \mu \longrightarrow I \models C \cdot \mu$

by $(\text{meson } \text{true_cls.mset_singleton})$

ultimately have $\gamma \in \text{sr.ext.inferences_from } (\text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\}))$

unfolding $\text{sr.ext.inferences_from_def } \text{unfolding } \text{ground_sound_}\Gamma\text{-def } \text{infer_from_def } \gamma\text{-def}$ **by** auto

then have $C \cdot \mu \in \text{concls_of } (\text{sr.ext.inferences_from } (\text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\})))$

using $\text{image_iff } \text{unfolding } \gamma\text{-def}$ **by** fastforce

then show $C \mu \in \text{concls_of } (\text{sr.ext.inferences_from } (\text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\})))$

using μ_p **by** auto

qed

lemma $\text{reduction_derivable}$:

assumes

$D + \{\#L'\#\} \in CC$ **and**

$-L = L' \cdot l \sigma$ **and**

$D \cdot \sigma \subseteq \# C$

shows $\text{sr.ext.derive } (\text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\})) (\text{grounding_of_clss } (CC \cup \{C\}))$

proof –

from assms **have** $\text{grounding_of_clss } (CC \cup \{C\}) - \text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\})$

$\subseteq \text{concls_of } (\text{sr.ext.inferences_from } (\text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\})))$

using $\text{reduction_in_concls_of } \text{unfolding } \text{grounding_of_clss_def } \text{clss_of_state_def}$

by auto

moreover

have $\text{grounding_of_cls } (C + \{\#L\#\}) \subseteq \text{sr.Rf } (\text{grounding_of_clss } (CC \cup \{C\}))$

using $\text{strict_subset_subsumption_grounding_redundant_clss}[of C \text{ id_subst}]$

by auto

then have $\text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\}) - \text{grounding_of_clss } (CC \cup \{C\})$

$\subseteq \text{sr.Rf } (\text{grounding_of_clss } (CC \cup \{C\}))$

unfolding $\text{clss_of_state_def } \text{grounding_of_clss_def}$ **by** auto

ultimately show $\text{sr.ext.derive } (\text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\})) (\text{grounding_of_clss } (CC \cup \{C\}))$

using $\text{sr.ext.derive.intros}[of \text{grounding_of_clss } (CC \cup \{C\})]$

$\text{grounding_of_clss } (CC \cup \{C + \{\#L\#\}\})$

by auto

qed

The following corresponds the part of Lemma 4.10 that states we have a theorem proving process:

lemma RP_ground_derive :

$St \rightsquigarrow St' \implies \text{sr.ext.derive } (\text{grounding_of_state } St) (\text{grounding_of_state } St')$

proof $(\text{induction rule: } \text{RP.induct})$

case $(\text{tautology_deletion } A \ C \ N \ P \ Q)$

{

fix $C \sigma$

assume $C \sigma \in \text{grounding_of_cls } C$

then obtain σ **where**

$C \sigma = C \cdot \sigma$

unfolding $\text{grounding_of_cls_def}$ **by** auto

then have $\text{Neg } (A \cdot a \ \sigma) \in \# \ C \sigma \wedge \text{Pos } (A \cdot a \ \sigma) \in \# \ C \sigma$

```

    using tautology_deletion Neg_Melem_subst_atm_subst_cls Pos_Melem_subst_atm_subst_cls by auto
  then have  $C\sigma \in sr.Rf$  (grounding_of_state (N, P, Q))
    using sr.tautology_redundant by auto
}
then have grounding_of_state (N  $\cup$  {C}, P, Q) – grounding_of_state (N, P, Q)
   $\subseteq sr.Rf$  (grounding_of_state (N, P, Q))
  unfolding cls_of_state_def grounding_of_cls_def by auto
moreover have grounding_of_state (N, P, Q) – grounding_of_state (N  $\cup$  {C}, P, Q) = {}
  unfolding cls_of_state_def grounding_of_cls_def by auto
ultimately show ?case
  using sr.ext.derive.intros[of grounding_of_state (N, P, Q) grounding_of_state (N  $\cup$  {C}, P, Q)]
  by auto
next
case (forward_subsumption D P Q C N)
then show ?case
  using derive_if_remove_subsumed[of D (N, P, Q) C] unfolding grounding_of_cls_def cls_of_state_def
  by (simp add: sup_commute sup_left_commute)
next
case (backward_subsumption_P D N C P Q)
then show ?case
  using derive_if_remove_subsumed[of D (N, P, Q) C] strictly_subsumes_def unfolding grounding_of_cls_def
  cls_of_state_def
  by (simp add: sup_commute sup_left_commute)
next
case (backward_subsumption_Q D N C P Q)
then show ?case
  using derive_if_remove_subsumed[of D (N, P, Q) C] strictly_subsumes_def unfolding grounding_of_cls_def
  cls_of_state_def
  by (simp add: sup_commute sup_left_commute)
next
case (forward_reduction D L' P Q L  $\sigma$  C N)
then show ?case
  using reduction_derivable[of _ _ N  $\cup$  P  $\cup$  Q] unfolding cls_of_state_def by force
next
case (backward_reduction_P D L' N L  $\sigma$  C P Q)
then show ?case
  using reduction_derivable[of _ _ N  $\cup$  P  $\cup$  Q] unfolding cls_of_state_def by force
next
case (backward_reduction_Q D L' N L  $\sigma$  C P Q)
then show ?case
  using reduction_derivable[of _ _ N  $\cup$  P  $\cup$  Q] unfolding cls_of_state_def by force
next
case (clause_processing N C P Q)
then show ?case
  unfolding cls_of_state_def using sr.ext.derive.intros by auto
next
case (inference_computation N Q C P)
{
  fix  $E\mu$ 
  assume  $E\mu \in$  grounding_of_cls N
  then obtain  $\mu E$  where
     $E_{\cdot\mu.p}: E\mu = E \cdot \mu \wedge E \in N \wedge is\_ground\_subst \mu$ 
    unfolding grounding_of_cls_def grounding_of_cls_def by auto
  then have  $E_{concl}: E \in$  concls_of (ord_FO_resolution.inferences_between Q C)
    using inference_computation by auto
  then obtain  $\gamma$  where
     $\gamma.p: \gamma \in ord\_FO\_I S \wedge infer\_from (Q \cup \{C\}) \gamma \wedge C \in \#$  prems_of  $\gamma \wedge concl\_of \gamma = E$ 
    unfolding ord_FO_resolution.inferences_between_def by auto
  then obtain CC CAs D AAs As  $\sigma$  where
     $\gamma.p2: \gamma = Infer CC D E \wedge ord\_resolve\_rename S CAs D AAs As \sigma E \wedge mset CAs = CC$ 
    unfolding ord_FO_I_def by auto
  define  $\rho$  where
     $\rho = hd$  (renamings_apart (D # CAs))
}

```

```

define  $\rho_s$  where
   $\rho_s = tl$  (renamings_apart (D # CAs))
define  $\gamma\_ground$  where
   $\gamma\_ground = Infer$  (mset (CAs ..cl  $\rho_s$ ) .cm  $\sigma$  .cm  $\mu$ ) (D .  $\rho$  .  $\sigma$  .  $\mu$ ) (E .  $\mu$ )
have  $\forall I. I \models mset$  (CAs ..cl  $\rho_s$ ) .cm  $\sigma$  .cm  $\mu \longrightarrow I \models D \cdot \rho \cdot \sigma \cdot \mu \longrightarrow I \models E \cdot \mu$ 
  using ord_resolve_rename_ground_inst_sound[of -----  $\mu$ ]  $\rho\_def$   $\rho_s\_def$  E- $\mu$ -p  $\gamma$ -p2
  by auto
then have  $\gamma\_ground \in \{Infer\ cc\ d\ e \mid cc\ d\ e. \forall I. I \models m\ cc \longrightarrow I \models d \longrightarrow I \models e\}$ 
  unfolding  $\gamma\_ground\_def$  by auto
moreover have set_mset (prems_of  $\gamma\_ground$ )  $\subseteq$  grounding_of_state ({}, P  $\cup$  {C}, Q)
proof -
  have D = C  $\vee$  D  $\in$  Q
    unfolding  $\gamma\_ground\_def$  using E- $\mu$ -p  $\gamma$ -p2  $\gamma$ -p unfolding infer_from_def
    unfolding class_of_state_def grounding_of_class_def
    unfolding grounding_of_cls_def
    by simp
  then have D .  $\rho$  .  $\sigma$  .  $\mu \in$  grounding_of_cls C  $\vee$  ( $\exists x \in Q. D \cdot \rho \cdot \sigma \cdot \mu \in$  grounding_of_cls x)
    using E- $\mu$ -p
    unfolding grounding_of_cls_def
    by (metis (mono_tags, lifting) is_ground_comp_subst mem_Collect_eq subst_cls_comp_subst)
  then have (D .  $\rho$  .  $\sigma$  .  $\mu \in$  grounding_of_cls C  $\vee$ 
    ( $\exists x \in P. D \cdot \rho \cdot \sigma \cdot \mu \in$  grounding_of_cls x)  $\vee$ 
    ( $\exists x \in Q. D \cdot \rho \cdot \sigma \cdot \mu \in$  grounding_of_cls x))
    by metis
  moreover have  $\forall i < length$  (CAs ..cl  $\rho_s$  .cl  $\sigma$  .cl  $\mu$ ). ((CAs ..cl  $\rho_s$  .cl  $\sigma$  .cl  $\mu$ ) ! i)  $\in$ 
    {C .  $\sigma \mid \sigma. is\_ground\_subst\ \sigma$ }  $\cup$ 
    (( $\bigcup C \in P. \{C \cdot \sigma \mid \sigma. is\_ground\_subst\ \sigma\}$ )  $\cup$  ( $\bigcup C \in Q. \{C \cdot \sigma \mid \sigma. is\_ground\_subst\ \sigma\}$ ))
  proof (rule, rule)
    fix i
    assume i < length (CAs ..cl  $\rho_s$  .cl  $\sigma$  .cl  $\mu$ )
    then have a: i < length CAs  $\wedge$  i < length  $\rho_s$ 
      by simp
    moreover from a have CAs ! i  $\in$  {C}  $\cup$  Q
      using  $\gamma$ -p2  $\gamma$ -p unfolding infer_from_def
      by (metis (no_types, lifting) Un_subset_iff inference.sel(1) set_mset_union
        sup_commute nth_mem_mset subsetCE)
    ultimately have (CAs ..cl  $\rho_s$  .cl  $\sigma$  .cl  $\mu$ ) ! i  $\in$ 
      {C .  $\sigma \mid \sigma. is\_ground\_subst\ \sigma$ }  $\vee$ 
      ((CAs ..cl  $\rho_s$  .cl  $\sigma$  .cl  $\mu$ ) ! i  $\in$  ( $\bigcup C \in P. \{C \cdot \sigma \mid \sigma. is\_ground\_subst\ \sigma\}$ )  $\vee$ 
      (CAs ..cl  $\rho_s$  .cl  $\sigma$  .cl  $\mu$ ) ! i  $\in$  ( $\bigcup C \in Q. \{C \cdot \sigma \mid \sigma. is\_ground\_subst\ \sigma\}$ ))
    unfolding  $\gamma\_ground\_def$  using E- $\mu$ -p  $\gamma$ -p2  $\gamma$ -p unfolding infer_from_def
    unfolding class_of_state_def grounding_of_class_def
    unfolding grounding_of_cls_def
    apply -
    apply (cases CAs ! i = C)
  subgoal
    apply (rule disjI1)
    apply (rule Set.CollectI)
    apply (rule_tac x=( $\rho_s$  ! i)  $\odot$   $\sigma$   $\odot$   $\mu$  in exI)
    using  $\rho_s\_def$  using renamings_apart_length apply (auto;fail)
    done
  subgoal
    apply (rule disjI2)
    apply (rule disjI2)
    apply (rule_tac a=CAs ! i in UN_I)
  subgoal
    apply blast
  done
  subgoal
    apply (rule Set.CollectI)
    apply (rule_tac x=( $\rho_s$  ! i)  $\odot$   $\sigma$   $\odot$   $\mu$  in exI)
    using  $\rho_s\_def$  using renamings_apart_length apply (auto;fail)
  done

```



```

    done
  done
  then show (CAs ..cl ρs ·cl σ ·cl μ) ! i ∈ {C · σ |σ. is_ground_subst σ} ∪
    ((⋃ C ∈ P. {C · σ |σ. is_ground_subst σ}) ∪ (⋃ C ∈ Q. {C · σ |σ. is_ground_subst σ}))
  by blast
qed
then have ∀ x ∈# mset (CAs ..cl ρs ·cl σ ·cl μ). x ∈ {C · σ |σ. is_ground_subst σ} ∪
  ((⋃ C ∈ P. {C · σ |σ. is_ground_subst σ}) ∪ (⋃ C ∈ Q. {C · σ |σ. is_ground_subst σ}))
  by (metis (lifting) in_set_conv_nth set_mset_mset)
then have set_mset (mset (CAs ..cl ρs) ·cm σ ·cm μ) ⊆
  grounding_of_cls C ∪ grounding_of_cls P ∪ grounding_of_cls Q
  unfolding grounding_of_cls_def grounding_of_cls_def
  using mset_subst_cls_list_subst_cls_mset by auto
ultimately show ?thesis
  unfolding γ_ground_def class_of_state_def grounding_of_cls_def by auto
qed
ultimately have E · μ ∈ concls_of (sr_ext.inferences_from (grounding_of_state ({}, P ∪ {C}, Q)))
  unfolding sr_ext.inferences_from_def inference_system.inferences_from_def ground_sound_Γ_def infer_from_def
  using γ_ground_def by (metis (no_types, lifting) imageI inference.sel(3) mem_Collect_eq)
then have Eμ ∈ concls_of (sr_ext.inferences_from (grounding_of_state ({}, P ∪ {C}, Q)))
  using E.μ-p by auto
}
then have grounding_of_state (N, P, Q ∪ {C}) – grounding_of_state ({}, P ∪ {C}, Q)
  ⊆ concls_of (sr_ext.inferences_from (grounding_of_state ({}, P ∪ {C}, Q)))
  unfolding class_of_state_def grounding_of_cls_def by auto
moreover have grounding_of_state ({}, P ∪ {C}, Q) – grounding_of_state (N, P, Q ∪ {C}) = {}
  unfolding class_of_state_def grounding_of_cls_def by auto
ultimately show ?case
  using sr_ext.derive.intros[of (grounding_of_state (N, P, Q ∪ {C}))
    (grounding_of_state ({}, P ∪ {C}, Q))] by auto
qed

```

A useful consequence:

theorem *RP_model*:

$St \rightsquigarrow St' \implies I \models_s \text{grounding_of_state } St' \iff I \models_s \text{grounding_of_state } St$

proof (*drule RP_ground_derive, erule sr_ext.derive.cases, hypsubst*)

let

?gSt = grounding_of_state St **and**
 ?gSt' = grounding_of_state St'

assume

deduct: ?gSt' – ?gSt ⊆ concls_of (sr_ext.inferences_from ?gSt) (**is** _ ⊆ ?concls) **and**
 delete: ?gSt – ?gSt' ⊆ sr.Rf ?gSt'

show $I \models_s ?gSt' \iff I \models_s ?gSt$

proof

assume bef: $I \models_s ?gSt$

then have $I \models_s ?concls$

unfolding ground_sound_Γ_def inference_system.inferences_from_def true_cls_def true_cls_mset_def
 by (auto simp add: image_def infer_from_def dest!: spec[of _ I])

then have diff: $I \models_s ?gSt' – ?gSt$

using deduct **by** (blast intro: true_cls_mono)

then show $I \models_s ?gSt'$

using bef **unfolding** true_cls_def **by** blast

next

assume aft: $I \models_s ?gSt'$

have $I \models_s ?gSt' \cup sr.Rf ?gSt'$

by (rule sr.Rf_model) (metis aft sr.Rf_mono[OF Un_upper1] Diff_eq_empty_iff Diff_subset
 Un_Diff true_cls_mono true_cls_union)

then have $I \models_s sr.Rf ?gSt'$

using true_cls_union **by** blast

then have diff: $I \models_s ?gSt – ?gSt'$

using delete **by** (blast intro: true_cls_mono)

```

then show  $I \models_s ?gSt$ 
  using aft unfolding true_cls_def by blast
qed

```

Another formulation of the part of Lemma 4.10 that states we have a theorem proving process:

```

lemma RP_ground_derive_chain:
  chain sr_ext.derive (lmap grounding_of_state Sts)
  using deriv RP_ground_derive by (simp add: chain_lmap[of (~)])

```

The following is used to prove Lemma 4.11:

```

lemma in_Sup_llist_in_nth:  $C \in \text{Sup\_llist } Gs \implies \exists j. \text{enat } j < \text{llength } Gs \wedge C \in \text{lnth } Gs j$ 
  unfolding Sup_llist_def by auto
  — Note: Gs is called Ns in the chapter

```

```

lemma Sup_llist_grounding_of_state_ground:
  assumes  $C \in \text{Sup\_llist } (lmap \text{grounding\_of\_state } Sts)$ 
  shows is_ground_cls C
proof —
  have  $\exists j. \text{enat } j < \text{llength } (lmap \text{grounding\_of\_state } Sts) \wedge C \in \text{lnth } (lmap \text{grounding\_of\_state } Sts) j$ 
    using assms in_Sup_llist_in_nth by metis
  then obtain j where
     $\text{enat } j < \text{llength } (lmap \text{grounding\_of\_state } Sts)$ 
     $C \in \text{lnth } (lmap \text{grounding\_of\_state } Sts) j$ 
    by blast
  then show ?thesis
    unfolding grounding_of_cls_def grounding_of_cls_def by auto
qed

```

```

lemma Liminf_grounding_of_state_ground:
   $C \in \text{Liminf\_llist } (lmap \text{grounding\_of\_state } Sts) \implies \text{is\_ground\_cls } C$ 
  using Liminf_llist_subset_Sup_llist[of lmap grounding_of_state Sts]
  Sup_llist_grounding_of_state_ground
  by blast

```

```

lemma in_Sup_llist_in_Sup_state:
  assumes  $C \in \text{Sup\_llist } (lmap \text{grounding\_of\_state } Sts)$ 
  shows  $\exists D \sigma. D \in \text{cls\_of\_state } (\text{Sup\_state } Sts) \wedge D \cdot \sigma = C \wedge \text{is\_ground\_subst } \sigma$ 
proof —
  from assms obtain i where
     $i\_p: \text{enat } i < \text{llength } Sts \wedge C \in \text{lnth } (lmap \text{grounding\_of\_state } Sts) i$ 
    using in_Sup_llist_in_nth by fastforce
  then obtain D σ where
     $D \in \text{cls\_of\_state } (\text{lnth } Sts i) \wedge D \cdot \sigma = C \wedge \text{is\_ground\_subst } \sigma$ 
    using assms unfolding grounding_of_cls_def grounding_of_cls_def by fastforce
  then have  $D \in \text{cls\_of\_state } (\text{Sup\_state } Sts) \wedge D \cdot \sigma = C \wedge \text{is\_ground\_subst } \sigma$ 
    using i_p unfolding Sup_state_def cls_of_state_def
    by (metis (no_types, lifting) UnCI UnE contra_subsetD N_of_state_simps P_of_state_simps
      Q_of_state_simps llength_lmap lnth_lmap lnth_subset_Sup_llist)
  then show ?thesis
    by auto
qed

```

```

lemma
  N_of_state_Liminf:  $N\_of\_state (Liminf\_state Sts) = Liminf\_llist (lmap N\_of\_state Sts)$  and
  P_of_state_Liminf:  $P\_of\_state (Liminf\_state Sts) = Liminf\_llist (lmap P\_of\_state Sts)$ 
  unfolding Liminf_state_def by auto

```

```

lemma eventually_removed_from_N:
  assumes
    d_in:  $D \in N\_of\_state (\text{lnth } Sts i)$  and
    fair: fair_state_seq Sts and
    i_Sts:  $\text{enat } i < \text{llength } Sts$ 

```

shows $\exists l. D \in N_of_state (lth\ Sts\ l) \wedge D \notin N_of_state (lth\ Sts\ (Suc\ l)) \wedge i \leq l \wedge enat\ (Suc\ l) < llength\ Sts$
proof (rule ccontr)
assume $a: \neg ?thesis$
have $i \leq l \implies enat\ l < llength\ Sts \implies D \in N_of_state (lth\ Sts\ l)$ **for** l
using d_in **by** (induction l , blast, metis $a\ Suc_ile_eq\ le_SucE\ less_imp_le$)
then have $D \in Liminf_llist (lmap\ N_of_state\ Sts)$
unfolding $Liminf_llist_def$ **using** i_Sts **by** auto
then show False
using fair **unfolding** $fair_state_seq_def$ **by** (simp add: $N_of_state_Liminf$)
qed

lemma *eventually_removed_from_P*:

assumes
 $d_in: D \in P_of_state (lth\ Sts\ i)$ **and**
 $fair: fair_state_seq\ Sts$ **and**
 $i_Sts: enat\ i < llength\ Sts$
shows $\exists l. D \in P_of_state (lth\ Sts\ l) \wedge D \notin P_of_state (lth\ Sts\ (Suc\ l)) \wedge i \leq l \wedge enat\ (Suc\ l) < llength\ Sts$
proof (rule ccontr)
assume $a: \neg ?thesis$
have $i \leq l \implies enat\ l < llength\ Sts \implies D \in P_of_state (lth\ Sts\ l)$ **for** l
using d_in **by** (induction l , blast, metis $a\ Suc_ile_eq\ le_SucE\ less_imp_le$)
then have $D \in Liminf_llist (lmap\ P_of_state\ Sts)$
unfolding $Liminf_llist_def$ **using** i_Sts **by** auto
then show False
using fair **unfolding** $fair_state_seq_def$ **by** (simp add: $P_of_state_Liminf$)
qed

lemma *instance_if_subsumed_and_in_limit*:

assumes
 $ns: Gs = lmap\ grounding_of_state\ Sts$ **and**
 $c: C \in Liminf_llist\ Gs - sr.Rf (Liminf_llist\ Gs)$ **and**
 $d: D \in N_of_state (lth\ Sts\ i) \cup P_of_state (lth\ Sts\ i) \cup Q_of_state (lth\ Sts\ i)$
 $enat\ i < llength\ Sts\ subsumes\ D\ C$
shows $\exists \sigma. D \cdot \sigma = C \wedge is_ground_subst\ \sigma$
proof –
let $?Ps = \lambda i. P_of_state (lth\ Sts\ i)$
let $?Qs = \lambda i. Q_of_state (lth\ Sts\ i)$
have $ground_C: is_ground_cls\ C$
using c **using** $Liminf_grounding_of_state_ground\ ns$ **by** auto

have $derivns: chain\ sr_ext.derive\ Gs$
using $RP_ground_derive_chain\ deriv\ ns$ **by** auto

have $\exists \sigma. D \cdot \sigma = C$

proof (rule ccontr)

assume $\nexists \sigma. D \cdot \sigma = C$

moreover from $d(3)$ **obtain** τ_proto **where**

$D \cdot \tau_proto \subseteq\# C$ **unfolding** $subsumes_def$
by blast

then obtain τ **where**

$\tau_p: D \cdot \tau \subseteq\# C \wedge is_ground_subst\ \tau$

using $ground_C$ **by** (metis $is_ground_cls_mono\ make_ground_subst\ subset_mset.order_refl$)

ultimately have $subsub: D \cdot \tau \subseteq\# C$

using $subset_mset.le_imp_less_or_eq$ **by** auto

moreover have $is_ground_subst\ \tau$

using τ_p **by** auto

moreover have $D \in cls_of_state (lth\ Sts\ i)$

using d **unfolding** $cls_of_state_def$ **by** auto

ultimately have $C \in sr.Rf (grounding_of_state (lth\ Sts\ i))$

using $strict_subset_subsumption_redundant_cls$ **by** auto

```

then have  $C \in sr.Rf$  (Sup_llist Gs)
  using  $d$   $ns$  by (metis contra_subsetD llength_lmap lnth_lmap lnth_subset_Sup_llist sr.Rf_mono)
then have  $C \in sr.Rf$  (Liminf_llist Gs)
  unfolding  $ns$  using local.sr_ext.Rf_Sup_subset_Rf_Liminf derivns ns by auto
then show False
  using  $c$  by auto
qed
then obtain  $\sigma$  where
   $D \cdot \sigma = C \wedge is\_ground\_subst \sigma$ 
  using ground_C by (metis make_ground_subst)
then show ?thesis
  by auto
qed

lemma from_Q_to_Q_inf:
assumes
  fair: fair_state_seq Sts and
  ns:  $Gs = lmap$  grounding_of_state Sts and
  c:  $C \in Liminf\_llist Gs - sr.Rf$  (Liminf_llist Gs) and
  d:  $D \in Q\_of\_state$  (lnth Sts i) enat i < llength Sts subsumes D C and
  d_least:  $\forall E \in \{E. E \in (cls\_of\_state (Sup\_state Sts)) \wedge subsumes E C\}. \neg strictly\_subsumes E D$ 
shows  $D \in Q\_of\_state$  (Liminf\_state Sts)
proof -
let ?Ps =  $\lambda i. P\_of\_state$  (lnth Sts i)
let ?Qs =  $\lambda i. Q\_of\_state$  (lnth Sts i)

have ground_C: is_ground_cls C
  using  $c$  using Liminf_grounding_of_state_ground ns by auto

have derivns: chain sr_ext.derive Gs
  using RP_ground_derive_chain deriv ns by auto

have  $\exists \sigma. D \cdot \sigma = C \wedge is\_ground\_subst \sigma$ 
  using instance_if_subsumed_and_in_limit ns c d by blast
then obtain  $\sigma$  where
   $\sigma: D \cdot \sigma = C$  is_ground_subst  $\sigma$ 
  by auto

have in_Sts_in_Sts_Suc:
   $\forall l \geq i. enat (Suc l) < llength Sts \longrightarrow D \in Q\_of\_state (lnth Sts l) \longrightarrow D \in Q\_of\_state (lnth Sts (Suc l))$ 
proof (rule, rule, rule, rule)
  fix  $l$ 
  assume
    len:  $i \leq l$  and
    llen:  $enat (Suc l) < llength Sts$  and
    d_in_q:  $D \in Q\_of\_state (lnth Sts l)$ 

  have lnth Sts l  $\rightsquigarrow$  lnth Sts (Suc l)
    using llen deriv chain_lnth_rel by blast
  then show  $D \in Q\_of\_state (lnth Sts (Suc l))$ 
  proof (cases rule: RP.cases)
    case (backward_subsumption_Q D' N D_removed P Q)
    moreover
    {
      assume  $D\_removed = D$ 
      then obtain  $D\_subsumes$  where
         $D\_subsumes\_p: D\_subsumes \in N \wedge strictly\_subsumes D\_subsumes D$ 
        using backward_subsumption_Q by auto
      moreover from  $D\_subsumes\_p$  have subsumes D_subsumes C
        using  $d$  subsumes_trans unfolding strictly_subsumes_def by blast
      moreover from backward_subsumption_Q have  $D\_subsumes \in cls\_of\_state (Sup\_state Sts)$ 
        using  $D\_subsumes\_p llen$ 
        by (metis (no_types) UnI1 cls_of_state_def N_of_state_simps llength_lmap lnth_lmap)
    }
  }

```

```

      lnth_subset_Sup_llist rev_subsetD Sup_state_def)
    ultimately have False
      using d_least unfolding subsumes_def by auto
  }
  ultimately show ?thesis
    using d_in_q by auto
next
case (backward_reduction_Q E L' N L  $\sigma$  D' P Q)
{
  assume D' + {#L#} = D
  then have D'_p: strictly_subsumes D' D  $\wedge$  D'  $\in$  ?Ps (Suc l)
    using subset_strictly_subsumes[of D' D] backward_reduction_Q by auto
  then have subc: subsumes D' C
    using d(?) subsumes.trans unfolding strictly_subsumes_def by auto
  from D'_p have D'  $\in$  clss_of_state (Sup_state Sts)
    using llen by (metis (no_types) UnI1 clss_of_state_def P_of_state.simps llength_lmap
      lnth_lmap lnth_subset_Sup_llist subsetCE sup_ge2 Sup_state_def)
  then have False
    using d_least D'_p subc by auto
}
then show ?thesis
  using backward_reduction_Q d_in_q by auto
qed (use d_in_q in auto)
qed
have D_in_Sts: D  $\in$  Q_of_state (lnth Sts l) and D_in_Sts_Suc: D  $\in$  Q_of_state (lnth Sts (Suc l))
  if L_i: l  $\geq$  i and enat: enat (Suc l) < llength Sts for l
proof -
show D  $\in$  Q_of_state (lnth Sts l)
  using L_i enat
  apply (induction l - i arbitrary: l)
  subgoal using d by auto
  subgoal using d(1) in_Sts_in_Sts_Suc
    by (metis (no_types, lifting) Suc_ile_eq add_Suc_right add_diff_cancel_left' le_SucE
      le_Suc_ex less_imp_le)
  done
  then show D  $\in$  Q_of_state (lnth Sts (Suc l))
    using L_i enat in_Sts_in_Sts_Suc by blast
qed
have i  $\leq$  x  $\implies$  enat x < llength Sts  $\implies$  D  $\in$  Q_of_state (lnth Sts x) for x
  apply (cases x)
  subgoal using d(1) by (auto intro!: exI[of _ i] simp: less_Suc_eq)
  subgoal for x'
    using d(1) D_in_Sts_Suc[of x'] by (cases (i  $\leq$  x')) (auto simp: not_less_eq_eq)
  done
  then have D  $\in$  Liminf_llist (lmap Q_of_state Sts)
    unfolding Liminf_llist_def by (auto intro!: exI[of _ i] simp: d)
  then show ?thesis
    unfolding Liminf_state_def by auto
qed

lemma from_P_to_Q:
  assumes
    fair: fair_state_seq Sts and
    ns: Gs = lmap grounding_of_state Sts and
    c: C  $\in$  Liminf_llist Gs - sr.Rf (Liminf_llist Gs) and
    d: D  $\in$  P_of_state (lnth Sts i) enat i < llength Sts subsumes D C and
    d_least:  $\forall E \in \{E. E \in (clss_of_state (Sup_state Sts)) \wedge \text{subsumes } E C\}. \neg \text{strictly\_subsumes } E D$ 
  shows  $\exists l. D \in Q\_of\_state (lnth Sts l) \wedge \text{enat } l < \text{llength } Sts$ 
proof -
  let ?Ns =  $\lambda i. N\_of\_state (lnth Sts i)$ 
  let ?Ps =  $\lambda i. P\_of\_state (lnth Sts i)$ 
  let ?Qs =  $\lambda i. Q\_of\_state (lnth Sts i)$ 

```

```

have ground_C: is_ground_cls C
  using c using Liminf_grounding_of_state_ground ns by auto

have derivns: chain sr_ext.derive Gs
  using RP_ground_derive_chain deriv ns by auto

have  $\exists \sigma. D \cdot \sigma = C \wedge is\_ground\_subst \sigma$ 
  using instance_if_subsumed_and_in_limit ns c d by blast
then obtain  $\sigma$  where
   $\sigma: D \cdot \sigma = C is\_ground\_subst \sigma$ 
  by auto

obtain l where
   $L_p: D \in P\_of\_state (lth Sts l) \wedge D \notin P\_of\_state (lth Sts (Suc l)) \wedge i \leq l \wedge enat (Suc l) < llength Sts$ 
  using fair using eventually_removed_from_P d unfolding ns by auto
then have LGs:  $enat (Suc l) < llength Gs$ 
  using ns by auto
from L_p have  $lth Sts l \rightsquigarrow lth Sts (Suc l)$ 
  using deriv using chain_lth_rel by auto
then show ?thesis
proof (cases rule: RP.cases)
case (backward_subsumption_P D' N D_twin P Q)
note lhs = this(1,2) and D'_p = this(3,4)
then have twins:  $D.twin = D \ ?Ns (Suc l) = N \ ?Ns l = N \ ?Ps (Suc l) = P$ 
   $\ ?Ps l = P \cup \{D\_twin\} \ ?Qs (Suc l) = Q \ ?Qs l = Q$ 
  using L_p by auto
note D'_p = D'_p[unfolded twins(1)]
then have subc: subsumes D' C
  unfolding strictly_subsumes_def subsumes_def using  $\sigma$ 
  by (metis subst_cls_comp_subst subst_cls_mono_mset)
from D'_p have  $D' \in clss\_of\_state (Sup\_state Sts)$ 
  unfolding twins(2)[symmetric] using L_p
  by (metis (no_types) UnI1 clss_of_state_def N_of_state_simps llength_lmap lth_lmap
    lth_subset_Sup_llist subsetCE Sup_state_def)
then have False
  using d_least D'_p subc by auto
then show ?thesis
  by auto
next
case (backward_reduction_P E L' N L  $\sigma$  D' P Q)
then have twins:  $D' + \{\#L\# \} = D \ ?Ns (Suc l) = N \ ?Ns l = N \ ?Ps (Suc l) = P \cup \{D'\}$ 
   $\ ?Ps l = P \cup \{D' + \{\#L\# \} \} \ ?Qs (Suc l) = Q \ ?Qs l = Q$ 
  using L_p by auto
then have D'_p: strictly_subsumes D' D  $\wedge D' \in \ ?Ps (Suc l)$ 
  using subset_strictly_subsumes[of D' D] by auto
then have subc: subsumes D' C
  using d(3) subsumes_trans unfolding strictly_subsumes_def by auto
from D'_p have  $D' \in clss\_of\_state (Sup\_state Sts)$ 
  using L_p by (metis (no_types) UnI1 clss_of_state_def P_of_state_simps llength_lmap lth_lmap
    lth_subset_Sup_llist subsetCE sup_ge2 Sup_state_def)
then have False
  using d_least D'_p subc by auto
then show ?thesis
  by auto
next
case (inference_computation N Q D_twin P)
then have twins:  $D.twin = D \ ?Ps (Suc l) = P \ ?Ps l = P \cup \{D\_twin\}$ 
   $\ ?Qs (Suc l) = Q \cup \{D\_twin\} \ ?Qs l = Q$ 
  using L_p by auto
then show ?thesis
  using d  $\sigma$  L_p by auto
qed (use L_p in auto)
qed

```

lemma *variants_sym*: *variants* $D D' \longleftrightarrow$ *variants* $D' D$
unfolding *variants_def* **by** *auto*

lemma *variants_imp_exists_substitution*: *variants* $D D' \implies \exists \sigma. D \cdot \sigma = D'$
unfolding *variants_iff_subsumes* *subsumes_def*
by (*meson* *strictly_subsumes_def* *subset_mset_def* *strict_subset_subst_strictly_subsumes* *subsumes_def*)

lemma *properly_subsume_variants*:
assumes *strictly_subsumes* $E D$ **and** *variants* $D D'$
shows *strictly_subsumes* $E D'$
proof –
from *assms* **obtain** $\sigma \sigma'$ **where**
 $\sigma \sigma'_p$: $D \cdot \sigma = D' \wedge D' \cdot \sigma' = D$
using *variants_imp_exists_substitution* *variants_sym* **by** *metis*

from *assms* **obtain** σ'' **where**
 $E \cdot \sigma'' \subseteq\# D$
unfolding *strictly_subsumes_def* *subsumes_def* **by** *auto*
then have $E \cdot \sigma'' \cdot \sigma \subseteq\# D \cdot \sigma$
using *subst_cls_mono_mset* **by** *blast*
then have $E \cdot (\sigma'' \odot \sigma) \subseteq\# D'$
using $\sigma \sigma'_p$ **by** *auto*
moreover from *assms* **have** n : ($\nexists \sigma. D \cdot \sigma \subseteq\# E$)
unfolding *strictly_subsumes_def* *subsumes_def* **by** *auto*
have $\nexists \sigma. D' \cdot \sigma \subseteq\# E$
proof
assume $\exists \sigma''' . D' \cdot \sigma''' \subseteq\# E$
then obtain σ''' **where**
 $D' \cdot \sigma''' \subseteq\# E$
by *auto*
then have $D \cdot (\sigma \odot \sigma''') \subseteq\# E$
using $\sigma \sigma'_p$ **by** *auto*
then show *False*
using n **by** *metis*
qed
ultimately show *?thesis*
unfolding *strictly_subsumes_def* *subsumes_def* **by** *metis*
qed

lemma *neg_properly_subsume_variants*:
assumes \neg *strictly_subsumes* $E D$ **and** *variants* $D D'$
shows \neg *strictly_subsumes* $E D'$
using *assms* *properly_subsume_variants* *variants_sym* **by** *auto*

lemma *from_N_to_P_or_Q*:
assumes
fair: *fair_state_seq* Sts **and**
ns: $Gs = \text{lmap } \text{grounding_of_state } Sts$ **and**
c: $C \in \text{Liminf_llist } Gs - \text{sr.Rf } (\text{Liminf_llist } Gs)$ **and**
d: $D \in N_of_state$ ($\text{lth } Sts \ i$) *enat* $i < \text{llength } Sts$ *subsumes* $D C$ **and**
d.least: $\forall E \in \{E. E \in (\text{cls_of_state } (\text{Sup_state } Sts)) \wedge \text{subsumes } E C\}. \neg$ *strictly_subsumes* $E D$
shows $\exists l D' \sigma'. D' \in P_of_state$ ($\text{lth } Sts \ l$) $\cup Q_of_state$ ($\text{lth } Sts \ l$) \wedge
enat $l < \text{llength } Sts \wedge$
 $(\forall E \in \{E. E \in (\text{cls_of_state } (\text{Sup_state } Sts)) \wedge \text{subsumes } E C\}. \neg$ *strictly_subsumes* $E D') \wedge$
 $D' \cdot \sigma' = C \wedge \text{is_ground_subst } \sigma' \wedge \text{subsumes } D' C$

proof –
let $?Ns = \lambda i. N_of_state$ ($\text{lth } Sts \ i$)
let $?Ps = \lambda i. P_of_state$ ($\text{lth } Sts \ i$)
let $?Qs = \lambda i. Q_of_state$ ($\text{lth } Sts \ i$)

have *ground_C*: *is_ground_cls* C
using *c* **using** *Liminf_grounding_of_state_ground* *ns* **by** *auto*

```

have derivns: chain sr_ext.derive Gs
  using RP_ground_derive_chain deriv ns by auto

have  $\exists \sigma. D \cdot \sigma = C \wedge \text{is\_ground\_subst } \sigma$ 
  using instance_if_subsumed_and_in_limit ns c d by blast
then obtain  $\sigma$  where
   $\sigma: D \cdot \sigma = C \text{ is\_ground\_subst } \sigma$ 
  by auto

from c have no_taut:  $\neg (\exists A. \text{Pos } A \in \# C \wedge \text{Neg } A \in \# C)$ 
  using sr.tautology_redundant by auto

have  $\exists l. D \in N\_of\_state (\text{Inth } Sts\ l) \wedge D \notin N\_of\_state (\text{Inth } Sts\ (\text{Suc } l)) \wedge i \leq l \wedge \text{enat } (\text{Suc } l) < \text{llength } Sts$ 
  using fair using eventually_removed_from_N d unfolding ns by auto
then obtain l where
   $l_p: D \in N\_of\_state (\text{Inth } Sts\ l) \wedge D \notin N\_of\_state (\text{Inth } Sts\ (\text{Suc } l)) \wedge i \leq l \wedge \text{enat } (\text{Suc } l) < \text{llength } Sts$ 
  by auto
then have L_Gs:  $\text{enat } (\text{Suc } l) < \text{llength } Gs$ 
  using ns by auto
from l_p have  $\text{Inth } Sts\ l \rightsquigarrow \text{Inth } Sts\ (\text{Suc } l)$ 
  using deriv using chain_inth_rel by auto
then show ?thesis
proof (cases rule: RP.cases)
  case (tautology_deletion A D_twin N P Q)
  then have D_twin = D
  using l_p by auto
  then have  $\text{Pos } (A \cdot a\ \sigma) \in \# C \wedge \text{Neg } (A \cdot a\ \sigma) \in \# C$ 
  using tautology_deletion(3,4)  $\sigma$ 
  by (metis Melem_subst_cls eql_neg_lit_eql_atm eql_pos_lit_eql_atm)
  then have False
  using no_taut by metis
then show ?thesis
  by blast
next
  case (forward_subsumption D' P Q D_twin N)
  note lrhs = this(1,2) and D'_p = this(3,4)
  then have twins:  $D\_twin = D \text{ ?Ns } (\text{Suc } l) = N \text{ ?Ns } l = N \cup \{D\_twin\} \text{ ?Ps } (\text{Suc } l) = P$ 
   $\text{?Ps } l = P \text{ ?Qs } (\text{Suc } l) = Q \text{ ?Qs } l = Q$ 
  using l_p by auto
  note D'_p = D'_p[unfolded twins(1)]
  from D'_p(2) have subs: subsumes D' C
  using d(3) by (blast intro: subsumes_trans)
  moreover have  $D' \in \text{cls\_of\_state } (\text{Sup\_state } Sts)$ 
  using twins D'_p l_p unfolding cls_of_state_def Sup_state_def
  by simp (metis (no_types) contra_subsetD llength_lmap Inth_lmap Inth_subset_Sup_llist)
  ultimately have  $\neg \text{strictly\_subsumes } D' D$ 
  using d_least by auto
  then have subsumes D D'
  unfolding strictly_subsumes_def using D'_p by auto
  then have v: variants D D'
  using D'_p unfolding variants_iff_subsumes by auto
  then have mini:  $\forall E \in \{E \in \text{cls\_of\_state } (\text{Sup\_state } Sts), \text{subsumes } E\ C\}. \neg \text{strictly\_subsumes } E D'$ 
  using d_least D'_p neg_properly_subsume_variants[of _ D D'] by auto

from v have  $\exists \sigma'. D' \cdot \sigma' = C$ 
  using  $\sigma$  variants_imp_exists_substitution variants_sym by (metis subst_cls_comp_subst)
then have  $\exists \sigma'. D' \cdot \sigma' = C \wedge \text{is\_ground\_subst } \sigma'$ 
  using ground_C by (meson make_ground_subst refl)
then obtain  $\sigma'$  where
   $\sigma'_p: D' \cdot \sigma' = C \wedge \text{is\_ground\_subst } \sigma'$ 
  by metis

```



```

show ?thesis
  using D'_p twins L_p subs mini  $\sigma'$ _p by auto
next
case (forward_reduction E L' P Q L  $\sigma$  D' N)
then have twins: D' + {#L#} = D ?Ns (Suc l) = N  $\cup$  {D'} ?Ns l = N  $\cup$  {D' + {#L#}}
  ?Ps (Suc l) = P ?Ps l = P ?Qs (Suc l) = Q ?Qs l = Q
  using L_p by auto
then have D'_p: strictly_subsumes D' D  $\wedge$  D'  $\in$  ?Ns (Suc l)
  using subset.strictly_subsumes[of D' D] by auto
then have subc: subsumes D' C
  using d(3) subsumes.trans unfolding strictly_subsumes_def by blast
from D'_p have D'  $\in$  class_of_state (Sup_state Sts)
  using L_p by (metis (no_types) Un11 class_of_state_def N_of_state.simps llength_lmap lnth_lmap
    lnth_subset_Sup_llist subsetCE Sup_state_def)
then have False
  using d_least D'_p subc by auto
then show ?thesis
  by auto
next
case (clause_processing N D_twin P Q)
then have twins: D_twin = D ?Ns (Suc l) = N ?Ns l = N  $\cup$  {D} ?Ps (Suc l) = P  $\cup$  {D}
  ?Ps l = P ?Qs (Suc l) = Q ?Qs l = Q
  using L_p by auto
then show ?thesis
  using d  $\sigma$  L_p d_least by blast
qed (use L_p in auto)
qed

```

lemma eventually_in_Qinf:

```

assumes
  D_p: D  $\in$  class_of_state (Sup_state Sts)
  subsumes D C  $\forall E \in \{E. E \in (class_of_state (Sup_state Sts)) \wedge subsumes E C\}. \neg strictly\_subsumes E D$  and
  fair: fair_state_seq Sts and

```

```

  ns: Gs = lmap grounding_of_state Sts and
  c: C  $\in$  Liminf_llist Gs - sr.Rf (Liminf_llist Gs) and
  ground_C: is_ground_cls C

```

shows $\exists D' \sigma'. D' \in Q_of_state (Liminf_state Sts) \wedge D' \cdot \sigma' = C \wedge is_ground_subst \sigma'$

proof -

```

let ?Ns =  $\lambda i. N\_of\_state (lnth Sts i)$ 
let ?Ps =  $\lambda i. P\_of\_state (lnth Sts i)$ 
let ?Qs =  $\lambda i. Q\_of\_state (lnth Sts i)$ 

```

from D_p obtain i where

```

  i_p: i < llength Sts D  $\in$  ?Ns i  $\vee$  D  $\in$  ?Ps i  $\vee$  D  $\in$  ?Qs i
  unfolding class_of_state_def Sup_state_def
  by simp_all (metis (no_types) in_Sup_llist_in_nth llength_lmap lnth_lmap)

```

have derivns: chain sr_ext.derive Gs using RP_ground_derive_chain deriv ns by auto

```

have  $\exists \sigma. D \cdot \sigma = C \wedge is\_ground\_subst \sigma$ 
  using instance_if_subsumed_and_in_limit[OF ns c] D_p i_p by blast
then obtain  $\sigma$  where
   $\sigma: D \cdot \sigma = C is\_ground\_subst \sigma$ 
  by blast

```

{

```

  assume a: D  $\in$  ?Ns i
  then obtain D'  $\sigma' l$  where D'_p:
    D'  $\in$  ?Ps l  $\cup$  ?Qs l
    D'  $\cdot \sigma' = C$ 
    enat l < llength Sts
    is_ground_subst  $\sigma'$ 

```

```

  ∀ E ∈ {E. E ∈ (clss_of_state (Sup_state Sts)) ∧ subsumes E C}. ¬ strictly_subsumes E D'
  subsumes D' C
  using from_N_to_P_or_Q deriv fair ns c i_p(1) D_p(2) D_p(3) by blast
then obtain l' where
  l'_p: D' ∈ ?Qs l' l' < llength Sts
  using from_P_to_Q[OF fair ns c - D'_p(3) D'_p(6) D'_p(5)] by blast
then have D' ∈ Q_of_state (Liminf_state Sts)
  using from_Q_to_Q_inf[OF fair ns c - l'_p(2)] D'_p by auto
then have ?thesis
  using D'_p by auto
}
moreover
{
  assume a: D ∈ ?Ps i
  then obtain l' where
  l'_p: D ∈ ?Qs l' l' < llength Sts
  using from_P_to_Q[OF fair ns c a i_p(1) D_p(2) D_p(3)] by auto
  then have D ∈ Q_of_state (Liminf_state Sts)
  using from_Q_to_Q_inf[OF fair ns c l'_p(1) l'_p(2)] D_p(3) σ(1) σ(2) D_p(2) by auto
  then have ?thesis
  using D_p σ by auto
}
moreover
{
  assume a: D ∈ ?Qs i
  then have D ∈ Q_of_state (Liminf_state Sts)
  using from_Q_to_Q_inf[OF fair ns c a i_p(1)] σ D_p(2,3) by auto
  then have ?thesis
  using D_p σ by auto
}
ultimately show ?thesis
  using i_p by auto
qed

```

The following corresponds to Lemma 4.11:

lemma *fair_imp_Liminf_minus_Rf_subset_ground_Liminf_state*:

assumes

fair: fair_state_seq Sts **and**

ns: Gs = lmap grounding_of_state Sts

shows $\text{Liminf_lstate } Gs - \text{sr.Rf } (\text{Liminf_llist } Gs) \subseteq \text{grounding_of_clss } (Q_of_state (\text{Liminf_state } Sts))$

proof

let ?Ns = λi. N_of_state (lnth Sts i)

let ?Ps = λi. P_of_state (lnth Sts i)

let ?Qs = λi. Q_of_state (lnth Sts i)

have *SQinf*: $\text{clss_of_state } (\text{Liminf_state } Sts) = \text{Liminf_llist } (\text{lmap } Q_of_state Sts)$

using fair **unfolding** fair_state_seq_def Liminf_state_def clss_of_state_def by auto

fix C

assume C_p: C ∈ Liminf_llist Gs - sr.Rf (Liminf_llist Gs)

then have C ∈ Sup_llist Gs

using Liminf_llist_subset_Sup_llist[of Gs] by blast

then obtain D_proto **where**

D_proto ∈ clss_of_state (Sup_state Sts) ∧ subsumes D_proto C

using in_Sup_llist_in_Sup_state **unfolding** ns subsumes_def by blast

then obtain D **where**

D_p: D ∈ clss_of_state (Sup_state Sts)

subsumes D C

∀ E ∈ {E. E ∈ clss_of_state (Sup_state Sts) ∧ subsumes E C}. ¬ strictly_subsumes E D

using strictly_subsumes_has_minimum[of {E. E ∈ clss_of_state (Sup_state Sts) ∧ subsumes E C}]

by auto

have ground_C: is_ground_cls C

```

using C_p using Liminf_grounding_of_state_ground ns by auto

have  $\exists D' \sigma'. D' \in Q\_of\_state (Liminf\_state Sts) \wedge D' \cdot \sigma' = C \wedge is\_ground\_subst \sigma'$ 
  using eventually_in_Qinf[of D C Gs] using D_p(1) D_p(2) D_p(3) fair ns C_p ground_C by auto
then obtain D'  $\sigma'$  where
  D'_p:  $D' \in Q\_of\_state (Liminf\_state Sts) \wedge D' \cdot \sigma' = C \wedge is\_ground\_subst \sigma'$ 
  by blast
then have  $D' \in class\_of\_state (Liminf\_state Sts)$ 
  by (simp add: class_of_state_def)
then have  $C \in grounding\_of\_state (Liminf\_state Sts)$ 
  unfolding grounding_of_cls_def grounding_of_cls_def using D'_p by auto
then show  $C \in grounding\_of\_cls (Q\_of\_state (Liminf\_state Sts))$ 
  using SQinf class_of_state_def fair fair_state_seq_def by auto
qed

```

The following corresponds to (one direction of) Theorem 4.13:

lemma *ground_subclauses*:

```

assumes
   $\forall i < length\ CAs. CAs ! i = Cs ! i + poss (AAs ! i)$  and
   $length\ Cs = length\ CAs$  and
   $is\_ground\_cls\_list\ CAs$ 
shows  $is\_ground\_cls\_list\ Cs$ 
unfolding  $is\_ground\_cls\_list\_def$ 
by (metis assms in_set_conv_nth  $is\_ground\_cls\_list\_def$   $is\_ground\_cls\_union$ )

```

lemma *subseq_Liminf_state_eventually_always*:

```

fixes CC
assumes
  finite CC and
   $CC \neq \{\}$  and
   $CC \subseteq Q\_of\_state (Liminf\_state Sts)$ 
shows  $\exists j. enat\ j < llength\ Sts \wedge (\forall j' \geq enat\ j. j' < llength\ Sts \longrightarrow CC \subseteq Q\_of\_state (lnth\ Sts\ j'))$ 
proof -
  from assms(3) have  $\forall C \in CC. \exists j. enat\ j < llength\ Sts \wedge$ 
    ( $\forall j' \geq enat\ j. j' < llength\ Sts \longrightarrow C \in Q\_of\_state (lnth\ Sts\ j')$ )
  unfolding  $Liminf\_state\_def$   $Liminf\_llist\_def$  by force
  then obtain f where
    f_p:  $\forall C \in CC. f\ C < llength\ Sts \wedge (\forall j' \geq enat\ (f\ C). j' < llength\ Sts \longrightarrow C \in Q\_of\_state (lnth\ Sts\ j'))$ 
  by moura

```

```

define j :: nat where
  j = Max (f ' CC)

```

```

have  $enat\ j < llength\ Sts$ 
  unfolding j_def using f_p assms(1)
  by (metis (mono_tags) Max_in assms(2) finite_imageI imageE image_is_empty)
moreover have  $\forall C\ j'. C \in CC \longrightarrow enat\ j \leq j' \longrightarrow j' < llength\ Sts \longrightarrow C \in Q\_of\_state (lnth\ Sts\ j')$ 
proof (intro allI impI)
  fix C :: 'a clause and j' :: nat
  assume a:  $C \in CC$   $enat\ j \leq enat\ j'$   $enat\ j' < llength\ Sts$ 
  then have  $f\ C \leq j'$ 
    unfolding j_def using assms(1) Max.bounded_iff by auto
  then show  $C \in Q\_of\_state (lnth\ Sts\ j')$ 
    using f_p a by auto
qed
ultimately show ?thesis
  by auto
qed

```

lemma *empty_clause_in_Q_of_Liminf_state*:

```

assumes
  empty_in:  $\{\#\} \in Liminf\_llist (lmap\ grounding\_of\_state\ Sts)$  and
  fair:  $fair\_state\_seq\ Sts$ 

```

shows $\{\#\} \in Q_of_state (Liminf_state Sts)$
proof –
define $Gs :: 'a$ clause set llist **where**
 $ns: Gs = lmap$ grounding_of_state Sts
from *empty_in* **have** $in_Liminf_not_Rf: \{\#\} \in Liminf_llist Gs - sr.Rf (Liminf_llist Gs)$
unfolding ns $sr.Rf_def$ **by** *auto*
then **have** $\{\#\} \in grounding_of_clss (Q_of_state (Liminf_state Sts))$
using $fair_imp_Liminf_minus_Rf_subset_ground_Liminf_state[OF$ *fair ns]* **by** *auto*
then **show** *?thesis*
unfolding $grounding_of_clss_def$ $grounding_of_cls_def$ **by** *auto*
qed

lemma $grounding_of_state_Liminf_state_subsetq:$
 $grounding_of_state (Liminf_state Sts) \subseteq Liminf_llist (lmap$ grounding_of_state $Sts)$

proof
fix $C :: 'a$ clause
assume $C \in grounding_of_state (Liminf_state Sts)$
then **obtain** $D \sigma$ **where**
 $D.\sigma.p: D \in clss_of_state (Liminf_state Sts) D \cdot \sigma = C$ *is_ground_subst* σ
unfolding $clss_of_state_def$ $grounding_of_clss_def$ $grounding_of_cls_def$ **by** *auto*
then **have** $ii: D \in Liminf_llist (lmap$ $N_of_state Sts) \vee$
 $D \in Liminf_llist (lmap$ $P_of_state Sts) \vee$
 $D \in Liminf_llist (lmap$ $Q_of_state Sts)$
unfolding $clss_of_state_def$ $Liminf_state_def$ **by** *simp*
then **have** $C \in Liminf_llist (lmap$ $grounding_of_clss (lmap$ $N_of_state Sts)) \vee$
 $C \in Liminf_llist (lmap$ $grounding_of_clss (lmap$ $P_of_state Sts)) \vee$
 $C \in Liminf_llist (lmap$ $grounding_of_clss (lmap$ $Q_of_state Sts))$
unfolding $Liminf_llist_def$ $grounding_of_clss_def$ $grounding_of_cls_def$
apply –
apply (*erule disjE*)
subgoal
apply (*rule disjI1*)
using $D.\sigma.p$ **by** *auto*
subgoal
apply (*erule HOL.disjE*)
subgoal
apply (*rule disjI2*)
apply (*rule disjI1*)
using $D.\sigma.p$ **by** *auto*
subgoal
apply (*rule disjI2*)
apply (*rule disjI2*)
using $D.\sigma.p$ **by** *auto*
done
done
then **show** $C \in Liminf_llist (lmap$ grounding_of_state $Sts)$
unfolding $Liminf_llist_def$ $clss_of_state_def$ $grounding_of_clss_def$ **by** *auto*
qed

theorem $RP_sound:$

assumes $\{\#\} \in clss_of_state (Liminf_state Sts)$
shows \neg *satisfiable* ($grounding_of_state$ (*lhd* Sts))
proof –
from *assms* **have** $\{\#\} \in grounding_of_state (Liminf_state Sts)$
unfolding $grounding_of_clss_def$ **by** (*force intro: ex_ground_subst*)
then **have** $\{\#\} \in Liminf_llist (lmap$ grounding_of_state $Sts)$
using $grounding_of_state_Liminf_state_subsetq$ **by** *auto*
then **have** \neg *satisfiable* ($Liminf_llist (lmap$ grounding_of_state $Sts)$)
using $true_clss_def$ **by** *auto*
then **have** \neg *satisfiable* (*lhd* ($lmap$ grounding_of_state Sts))
using $sr_ext.sat_limit_iff$ $RP_ground_derive_chain$ **by** *metis*
then **show** *?thesis*
unfolding lhd_lmap_Sts .

qed

lemma *ground_ord_resolve_ground*:

assumes

CAs_p: *gr_ord_resolve* *CAs* *DA* *AA*s *As* *E* **and**

ground_cas: *is_ground_cls_list* *CAs* **and**

ground_da: *is_ground_cls* *DA*

shows *is_ground_cls* *E*

proof –

have *a1*: *atms_of* *E* \subseteq (\bigcup *CA* \in *set* *CAs*. *atms_of* *CA*) \cup *atms_of* *DA*

using *gr_ord_resolve_atms_of_concl_subset*[*of* *CAs* *DA* - - *E*] *CAs_p* **by** *auto*

{

fix *L* :: 'a *literal*

assume *L* \in # *E*

then have *atm_of* *L* \in *atms_of* *E*

by (*meson* *atm_of_lit_in_atms_of*)

then have *is_ground_atm* (*atm_of* *L*)

using *a1* *ground_cas* *ground_da* *is_ground_cls_imp_is_ground_atm* *is_ground_cls_list_def*

by *auto*

}

then show *?thesis*

unfolding *is_ground_cls_def* *is_ground_lit_def* **by** *simp*

qed

theorem *RP_saturated_if_fair*:

assumes *fair*: *fair_state_seq* *Sts*

shows *sr.saturated_upto* (*Liminf_llist* (*lmap* *grounding_of_state* *Sts*))

proof –

define *Gs* :: 'a *clause set llist* **where**

ns: *Gs* = *lmap* *grounding_of_state* *Sts*

let *?N* = λi . *grounding_of_state* (*lnth* *Sts* *i*)

let *?Ns* = λi . *N_of_state* (*lnth* *Sts* *i*)

let *?Ps* = λi . *P_of_state* (*lnth* *Sts* *i*)

let *?Qs* = λi . *Q_of_state* (*lnth* *Sts* *i*)

have *ground_ns_in_ground_limit_st*:

Liminf_llist *Gs* – *sr.Rf* (*Liminf_llist* *Gs*) \subseteq *grounding_of_cls* (*Q_of_state* (*Liminf_state* *Sts*))

using *fair* *deriv* *fair_imp_Liminf_minus_Rf_subset_ground_Liminf_state* *ns* **by** *blast*

have *derivns*: *chain* *sr_ext.derive* *Gs*

using *RP_ground_derive_chain* *deriv* *ns* **by** *auto*

{

fix γ :: 'a *inference*

assume γ _p: $\gamma \in$ *gr_ord* Γ

let *?CC* = *side_prem*s_of γ

let *?DA* = *main_prem*_of γ

let *?E* = *concl*_of γ

assume *a*: *set_mset* *?CC* \cup {*?DA*}

\subseteq *Liminf_llist* (*lmap* *grounding_of_state* *Sts*) – *sr.Rf* (*Liminf_llist* (*lmap* *grounding_of_state* *Sts*))

have *ground_ground_Liminf*: *is_ground_cls* (*Liminf_llist* (*lmap* *grounding_of_state* *Sts*))

using *Liminf_grounding_of_state_ground* **unfolding** *is_ground_cls_def* **by** *auto*

have *ground_cc*: *is_ground_cls* (*set_mset* *?CC*)

using *a* *ground_ground_Liminf* *is_ground_cls_def* **by** *auto*

have *ground_da*: *is_ground_cls* *?DA*

using *a* *grounding_ground_singletonI* *ground_ground_Liminf*

by (*simp* *add*: *Liminf_grounding_of_state_ground*)

from γ_p **obtain** CAs AAs As **where**
 CAs_p : $gr.ord_resolve$ CAs $?DA$ AAs As $?E \wedge mset$ $CAs = ?CC$
unfolding $gr.ord_def$ **by** *auto*

have $DA_CAs.in_ground_Liminf$:
 $\{?DA\} \cup set$ $CAs \subseteq grounding_of_class$ (Q_of_state ($Liminf_state$ Sts))
using a CAs_p **unfolding** $class_of_state_def$ **using** *fair* **unfolding** $fair_state_seq_def$
by (*metis* (*no_types*, *lifting*) Un_empty_left $ground_ns.in_ground_limit_st$ a $class_of_state_def$
 ns set_mset_mset $subset_trans$ $sup_commute$)

then have $ground_cas$: $is_ground_cls_list$ CAs
using CAs_p **unfolding** $is_ground_cls_list_def$ **by** *auto*

then have $ground_e$: is_ground_cls $?E$
using $ground_ord_resolve_ground$ CAs_p $ground_da$ **by** *auto*

have $\exists AAs$ As σ . $ord_resolve$ (S_M S (Q_of_state ($Liminf_state$ Sts))) CAs $?DA$ AAs As σ $?E$
using CAs_p [*THEN* *conjunct1*]

proof (*cases* *rule*: $gr.ord_resolve.cases$)
case ($ord_resolve$ n Cs D)
note $DA = this(1)$ **and** $e = this(2)$ **and** $cas_len = this(3)$ **and** $cs_len = this(4)$ **and**
 $aas_len = this(5)$ **and** $as_len = this(6)$ **and** $nz = this(7)$ **and** $cas = this(8)$ **and**
 $aas_not_empt = this(9)$ **and** $as_aas = this(10)$ **and** $eligibility = this(11)$ **and**
 $str_max = this(12)$ **and** $sel_empt = this(13)$

have $len_aas.len_as$: $length$ $AAs = length$ As
using aas_len as_len **by** *auto*

from as_aas **have** $\forall i < n$. $\forall A \in \#$ add_mset ($As ! i$) ($AAs ! i$). $A = As ! i$
using $ord_resolve$ **by** *simp*

then have $\forall i < n$. $card$ (set_mset (add_mset ($As ! i$) ($AAs ! i$))) $\leq Suc$ 0
using *all_the_same* **by** *metis*

then have $\forall i < length$ AAs . $card$ (set_mset (add_mset ($As ! i$) ($AAs ! i$))) $\leq Suc$ 0
using aas_len **by** *auto*

then have $\forall AA \in set$ ($map2$ add_mset As AAs). $card$ (set_mset AA) $\leq Suc$ 0
using set_map2_ex [*of* AAs As add_mset , *OF* $len_aas.len_as$] **by** *auto*

then have $is_unifiers$ $id.subst$ (set_mset ' set ($map2$ add_mset As AAs))
unfolding $is_unifiers_def$ $is_unifier_def$ **by** *auto*

moreover have $finite$ (set_mset ' set ($map2$ add_mset As AAs))
by *auto*

moreover have $\forall AA \in set_mset$ ' set ($map2$ add_mset As AAs). $finite$ AA
by *auto*

ultimately obtain σ **where**
 σ_p : *Some* $\sigma = mgu$ (set_mset ' set ($map2$ add_mset As AAs))
using $mgu_complete$ **by** *metis*

have $ground_elig$: $gr.eligible$ As ($D + negs$ ($mset$ As))
using $ord_resolve$ **by** *simp*

have $ground_cs$: $\forall i < n$. is_ground_cls ($Cs ! i$)
using $ord_resolve(8)$ $ord_resolve(3,4)$ $ground_cas$
using $ground_subclauses$ [*of* CAs Cs AAs] **unfolding** $is_ground_cls_list_def$ **by** *auto*

have $ground_set_as$: is_ground_atms (set As)
using $ord_resolve(1)$ $ground_da$
by (*metis* $atms_of_negs$ $is_ground_cls_union$ set_mset_mset is_ground_cls is_ground_atms $atms_of$)

then have $ground_mset_as$: $is_ground_atm_mset$ ($mset$ As)
unfolding $is_ground_atm_mset_def$ $is_ground_atms_def$ **by** *auto*

have $ground_as$: $is_ground_atm_list$ As
using $ground_set_as$ $is_ground_atm_list_def$ $is_ground_atms_def$ **by** *auto*

have $ground_d$: is_ground_cls D
using $ground_da$ $ord_resolve$ **by** *simp*

from as_len nz **have** $atms_of$ $D \cup set$ $As \neq \{\}$ $finite$ ($atms_of$ $D \cup set$ As)
by *auto*

then have $Max (atms_of\ D \cup set\ As) \in atms_of\ D \cup set\ As$
using $Max.in$ **by** $metis$
then have $is_ground_Max: is_ground_atm (Max (atms_of\ D \cup set\ As))$
using $ground_d\ ground_mset_as\ is_ground_cls_imp_is_ground_atm$
unfolding $is_ground_atm_mset_def$ **by** $auto$
then have $Max\sigma_is_Max: \forall \sigma. Max (atms_of\ D \cup set\ As) \cdot a\ \sigma = Max (atms_of\ D \cup set\ As)$
by $auto$

have $ann1: maximal_wrt (Max (atms_of\ D \cup set\ As)) (D + negs (mset\ As))$
unfolding $maximal_wrt_def$
by $clarsimp (metis\ Max.less_iff\ UnCI\ \langle atms_of\ D \cup set\ As \neq \{\} \rangle$
 $\langle finite\ (atms_of\ D \cup set\ As) \rangle\ ground_d\ ground_set_as\ infinite_growing\ is_ground_Max$
 $is_ground_atms_def\ is_ground_cls_imp_is_ground_atm\ less_atm_ground)$

from $ground_elig$ **have** $ann2:$
 $Max (atms_of\ D \cup set\ As) \cdot a\ \sigma = Max (atms_of\ D \cup set\ As)$
 $D \cdot \sigma + negs (mset\ As \cdot am\ \sigma) = D + negs (mset\ As)$
using $is_ground_Max\ ground_mset_as\ ground_d$ **by** $auto$

from $ground_elig$ **have** $fo_elig:$
 $eligible (S_M\ S (Q_of_state (Liminf_state\ Sts)))\ \sigma\ As (D + negs (mset\ As))$
unfolding $gr.eligible.simps\ eligible.simps\ gr.maximal_wrt_def$ **using** $ann1\ ann2$
by $(auto\ simp: S_Q_def)$

have $l: \forall i < n. gr.strictly_maximal_wrt (As\ !\ i) (Cs\ !\ i)$
using $ord_resolve$ **by** $simp$
then have $\forall i < n. strictly_maximal_wrt (As\ !\ i) (Cs\ !\ i)$
unfolding $gr.strictly_maximal_wrt_def\ strictly_maximal_wrt_def$
using $ground_as[unfolded\ is_ground_atm_list_def]\ ground_cs\ as_len\ less_atm_ground$
by $clarsimp (fastforce\ simp: is_ground_cls_as_atms)+$

then have $ll: \forall i < n. strictly_maximal_wrt (As\ !\ i \cdot a\ \sigma) (Cs\ !\ i \cdot \sigma)$
by $(simp\ add: ground_as\ ground_cs\ as_len)$

have $m: \forall i < n. S_Q (CAs\ !\ i) = \{\#\}$
using $ord_resolve$ **by** $simp$

have $ground_e: is_ground_cls (\bigcup \# (mset\ Cs) + D)$
using $ground_d\ ground_cs\ ground_e\ e$ **by** $simp$
show $?thesis$
using $ord_resolve.intros[OF\ cas_len\ cs_len\ aas_len\ as_len\ nz\ cas\ aas_not_empty\ \sigma_p\ fo_elig\ ll]\ m\ DA\ e\ ground_e$
unfolding S_Q_def **by** $auto$

qed

then obtain $AA_s\ As\ \sigma$ **where**
 $\sigma_p: ord_resolve (S_M\ S (Q_of_state (Liminf_state\ Sts)))\ CAs\ ?DA\ AA_s\ As\ \sigma\ ?E$
by $auto$

then obtain $\eta_s'\ \eta'\ \eta_2'\ CAs'\ DA'\ AA_s'\ As'\ \tau'\ E'$ **where** $s_p:$
 $is_ground_subst\ \eta'$
 $is_ground_subst_list\ \eta_s'$
 $is_ground_subst\ \eta_2'$
 $ord_resolve_rename\ S\ CAs'\ DA'\ AA_s'\ As'\ \tau'\ E'$
 $CAs' \cdot cl\ \eta_s' = CAs$
 $DA' \cdot \eta' = ?DA$
 $E' \cdot \eta_2' = ?E$
 $\{DA'\} \cup set\ CAs' \subseteq Q_of_state (Liminf_state\ Sts)$
using $ord_resolve_rename_lifting[OF\ sel_stable, of\ Q_of_state (Liminf_state\ Sts)\ CAs\ ?DA]$
 $\sigma_p\ selection_axioms\ DA_CAs_in_ground_Liminf$ **by** $metis$

from $this(8)$ **have** $\exists j. enat\ j < llength\ Sts \wedge (set\ CAs' \cup \{DA'\} \subseteq ?Qs\ j)$
unfolding $Liminf.llist_def$
using $subsetq_Liminf_state_eventually_always[of\ \{DA'\} \cup set\ CAs']$ **by** $auto$

then obtain j **where**
 $j_p: is_least (\lambda j. enat\ j < llength\ Sts \wedge set\ CAs' \cup \{DA'\} \subseteq ?Qs\ j)\ j$
using $least_exists[of\ \lambda j. enat\ j < llength\ Sts \wedge set\ CAs' \cup \{DA'\} \subseteq ?Qs\ j]$ **by** $force$

```

then have  $j\_p'$ :  $\text{enat } j < \text{llength } \text{Sts set } \text{CAs}' \cup \{\text{DA}'\} \subseteq ?\text{Qs } j$ 
unfolding  $\text{is\_least\_def}$  by  $\text{auto}$ 
then have  $jn0$ :  $j \neq 0$ 
using  $\text{empty\_Q0}$  by ( $\text{metis } \text{bot\_eq\_sup\_iff } \text{gr\_implies\_not\_zero } \text{insert\_not\_empty } \text{llength\_lnull}$ 
 $\text{lnth\_0\_conv\_lhd } \text{sup.orderE}$ )
then have  $j\_adds\_CAs'$ :  $\neg \text{set } \text{CAs}' \cup \{\text{DA}'\} \subseteq ?\text{Qs } (j - 1) \text{ set } \text{CAs}' \cup \{\text{DA}'\} \subseteq ?\text{Qs } j$ 
using  $j\_p$  unfolding  $\text{is\_least\_def}$ 
apply ( $\text{metis } (\text{no\_types}) \text{One\_nat\_def } \text{Suc\_diff\_Suc } \text{Suc\_ile\_eq } \text{diff\_diff\_cancel } \text{diff\_zero}$ 
 $\text{less\_imp\_le } \text{less\_one } \text{neq0\_conv } \text{zero\_less\_diff}$ )
using  $j\_p'(2)$  by  $\text{blast}$ 
have  $\text{lnth } \text{Sts } (j - 1) \rightsquigarrow \text{lnth } \text{Sts } j$ 
using  $j\_p'(1)$   $jn0$   $\text{deriv } \text{chain\_lnth\_rel}[of \_ \_ j - 1]$  by  $\text{force}$ 
then obtain  $C'$  where  $C'_p$ :
 $?Ns (j - 1) = \{\}$ 
 $?Ps (j - 1) = ?Ps j \cup \{C'\}$ 
 $?Qs j = ?Qs (j - 1) \cup \{C'\}$ 
 $?Ns j = \text{concls\_of } (\text{ord\_FO\_resolution.infernces\_between } (?Qs (j - 1)) C')$ 
 $C' \in \text{set } \text{CAs}' \cup \{\text{DA}'\}$ 
 $C' \notin ?Qs (j - 1)$ 
using  $j\_adds\_CAs'$  by ( $\text{induction rule: } \text{RP.cases}$ )  $\text{auto}$ 
have  $E' \in ?Ns j$ 
proof -
have  $E' \in \text{concls\_of } (\text{ord\_FO\_resolution.infernces\_between } (\text{Q\_of\_state } (\text{lnth } \text{Sts } (j - 1))) C')$ 
unfolding  $\text{infer\_from\_def } \text{ord\_FO}\_\Gamma\_def$  unfolding  $\text{inference\_system.infernces\_between\_def}$ 
apply ( $\text{rule\_tac } x = \text{Infer } (\text{mset } \text{CAs}') \text{DA}' E' \text{in } \text{image\_eqI}$ )
subgoal by  $\text{auto}$ 
subgoal
using  $s\_p(4)$ 
unfolding  $\text{infer\_from\_def}$ 
apply ( $\text{rule } \text{ord\_resolve\_rename.cases}$ )
using  $s\_p(4)$ 
using  $C'_p(3)$   $C'_p(5)$   $j\_p'(2)$  apply  $\text{force}$ 
done
done
then show  $?thesis$ 
using  $C'_p(4)$  by  $\text{auto}$ 
qed
then have  $E' \in \text{class\_of\_state } (\text{lnth } \text{Sts } j)$ 
using  $j\_p'$  unfolding  $\text{class\_of\_state\_def}$  by  $\text{auto}$ 
then have  $?E \in \text{grounding\_of\_state } (\text{lnth } \text{Sts } j)$ 
using  $s\_p(7)$   $s\_p(3)$  unfolding  $\text{grounding\_of\_class\_def } \text{grounding\_of\_cls\_def}$  by  $\text{force}$ 
then have  $\gamma \in \text{sr.Ri } (\text{grounding\_of\_state } (\text{lnth } \text{Sts } j))$ 
using  $\text{sr.Ri\_effective } \gamma\_p$  by  $\text{auto}$ 
then have  $\gamma \in \text{sr\_ext.Ri } (?N j)$ 
unfolding  $\text{sr\_ext.Ri\_def}$  by  $\text{auto}$ 
then have  $\gamma \in \text{sr\_ext.Ri } (\text{Sup\_llist } (\text{lmap } \text{grounding\_of\_state } \text{Sts}))$ 
using  $j\_p'$   $\text{contra\_subsetD } \text{llength\_lmap } \text{lnth\_lmap } \text{lnth\_subset\_Sup\_llist } \text{sr\_ext.Ri\_mono}$  by  $\text{metis}$ 
then have  $\gamma \in \text{sr\_ext.Ri } (\text{Liminf\_llist } (\text{lmap } \text{grounding\_of\_state } \text{Sts}))$ 
using  $\text{sr\_ext.Ri\_Sup\_subset\_Ri\_Liminf}[of Gs]$   $\text{derivns } ns$  by  $\text{blast}$ 
}
then have  $\text{sr\_ext.saturated\_upto } (\text{Liminf\_llist } (\text{lmap } \text{grounding\_of\_state } \text{Sts}))$ 
unfolding  $\text{sr\_ext.saturated\_upto\_def } \text{sr\_ext.infernces\_from\_def } \text{infer\_from\_def } \text{sr\_ext.Ri\_def}$ 
by  $\text{auto}$ 
then show  $?thesis$ 
using  $\text{gd\_ord}\_\Gamma\_ngd\_ord\_Gamma$   $\text{sr.redundancy\_criterion\_axioms}$ 
 $\text{redundancy\_criterion\_standard\_extension\_saturated\_upto\_iff}[of \text{gr.ord}\_\Gamma]$ 
unfolding  $\text{sr\_ext.Ri\_def}$  by  $\text{auto}$ 
qed

```

corollary $\text{RP_complete_if_fair}$:

```

assumes
 $\text{fair: fair\_state\_seq } \text{Sts}$  and
 $\text{unsat: } \neg \text{satisfiable } (\text{grounding\_of\_state } (\text{lhd } \text{Sts}))$ 

```



```

shows {#} ∈ Q_of_state (Liminf_state Sts)
proof –
  have ¬ satisfiable (Liminf_llist (lmap grounding_of_state Sts))
    unfolding sr_ext.sat_limit_iff[OF RP_ground_derive_chain]
    by (rule unsat[folded lhd_lmap_Sts[of grounding_of_state]])
  moreover have sr.saturated_upto (Liminf_llist (lmap grounding_of_state Sts))
    by (rule RP_saturated_if_fair[OF fair, simplified])
  ultimately have {#} ∈ Liminf_llist (lmap grounding_of_state Sts)
    using sr.saturated_upto_complete_if by auto
  then show ?thesis
    using empty_clause_in_Q_of_Liminf_state_fair by auto
qed

end

end

end

end

```